EVERLIGHT AMERICAS

DATASHEET

SMD ▪ B
EAST1916RGA1

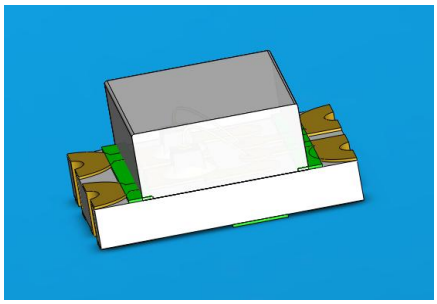

Features

- Package in 8mm tape on 7″ diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

- The SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Device Selection Guide

Chip Type	Chip Materials	Emitted Color	Resin Color
R6	AlGaInP	Brilliant Red	Water Clear
GH	InGaN	Brilliant Green	

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	R6:25 GH:25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	R6:60 GH:100	mA
Power Dissipation	Pd	R6:60 GH:95	mW
Operating Temperature	T_{opr}	-40 ~ +85	℃
Storage Temperature	Tstg	-40 ~ +90	℃
Electrostatic Discharge	ESD_{HBM}	R6:2000 GH:150	V
Soldering Temperature	T_{sol}	Reflow Soldering : 260 ℃ for 10 sec. Hand Soldering : 350 ℃ for 3 sec.	

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	R6: 72.0 GH: 112.0	----- -----	140 225	mcd	I_F=5mA
Viewing Angle	$2\theta_{1/2}$	-----	130	------	deg	
Peak Wavelength	λ p	R6: ----- GH: -----	632 518	------ ------	nm	
Dominant Wavelength	λ d	R6: 615 GH: 520	------ ------	625 530	nm	
Spectrum Radiation Bandwidth	△λ	R6: ----- GH:: -----	20 35	------ ------	nm	
Forward Voltage	V_F	R6:1.7 GH:2.7	2.0 3.3	2.4 3.7	V	
Reverse Current	I_R	R6: ----- GH: -----	------ ------	10 50	μA	V_R=5V

Notes：

1.Tolerance of Luminous Intensity: ±11%

2.Tolerance of Dominant Wavelength：±1nm

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

R6
Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
Q1	72.0	90.0	mcd	I_F =20mA
Q2	90.0	112.0		
R1	112.0	140.0		

GH
Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
R1	112.0	140.0	mcd	I_F =20mA
R2	140.0	180.0		
S1	180.0	225.0		

Notes：
Tolerance of Luminous Intensity: ±11%

R6
Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
1	615.0	620.0	nm	IF =20mA
2	620.0	625.0		

GH
Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
1	520.0	525.0	nm	IF =20mA
2	525.0	530.0		

Notes：

Tolerance of Dominant Wavelength：±1nm

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Typical Electro-Optical Characteristics Curves

R6:

Spectrum Distribution

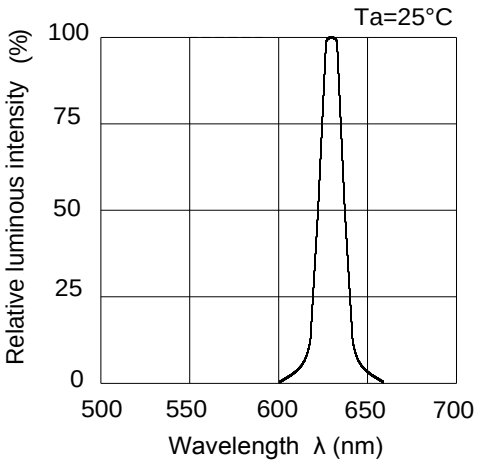

Forward Current vs. Forward Voltage

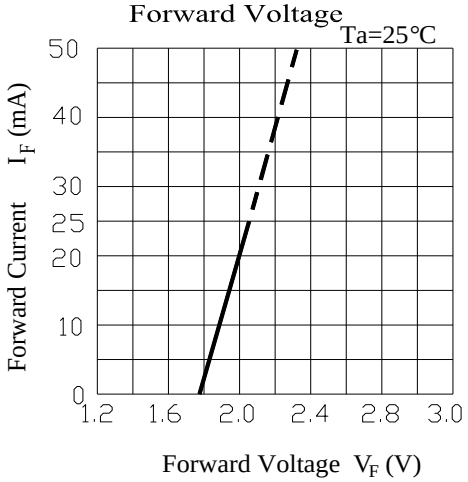

Luminous Intensity vs. Ambient Temperature

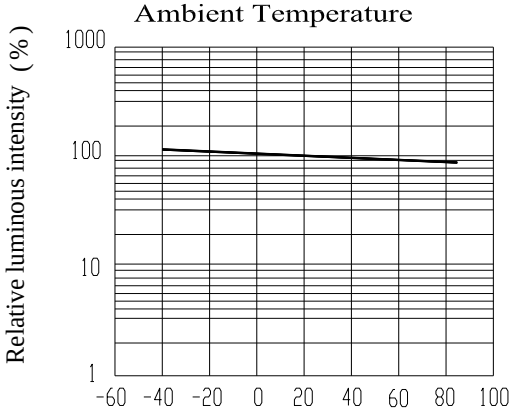

Luminous Intensity vs Forward Current

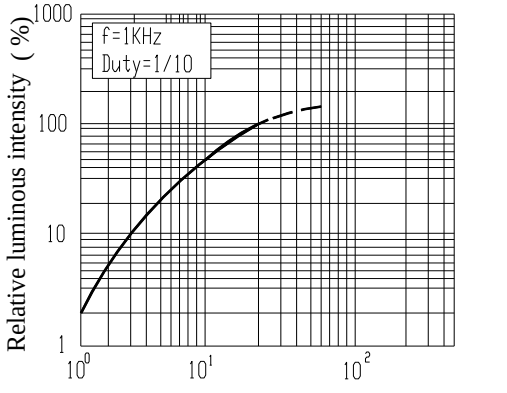

Forward Current Derating Curve

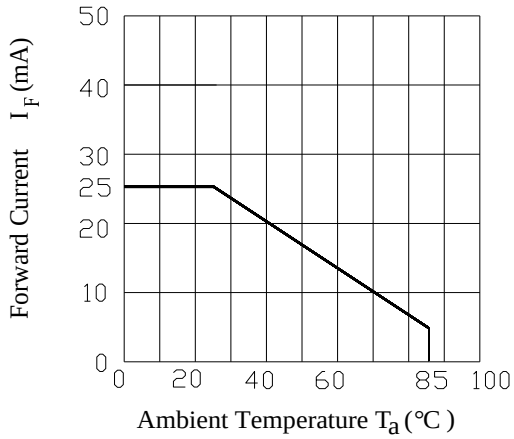

Radiation Diagram

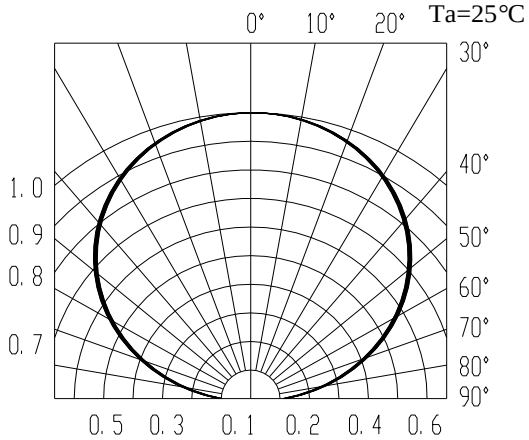

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Typical Electro-Optical Characteristics Curves

GH:

Spectrum Distribution

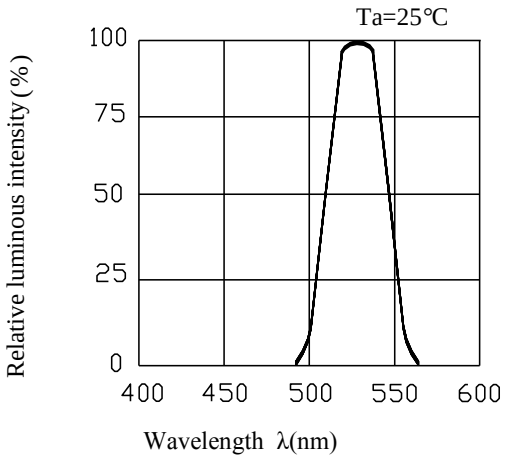

Forward Current vs. Forward Voltage

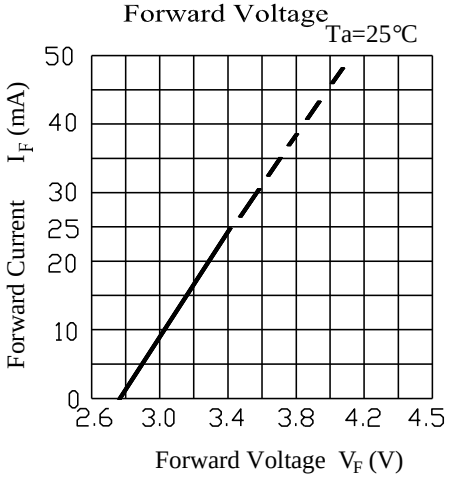

Luminous Intensity vs. Ambient Temperature

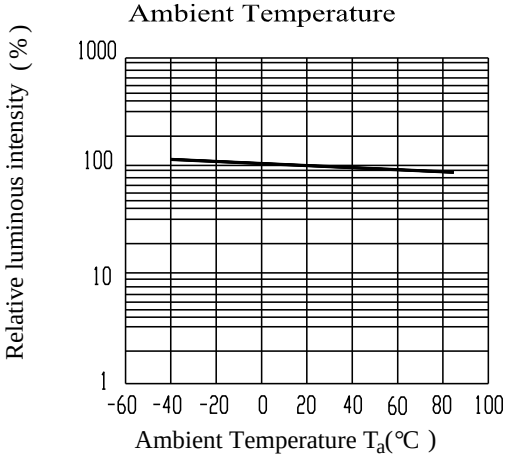

Luminous Intensity vs Forward Current

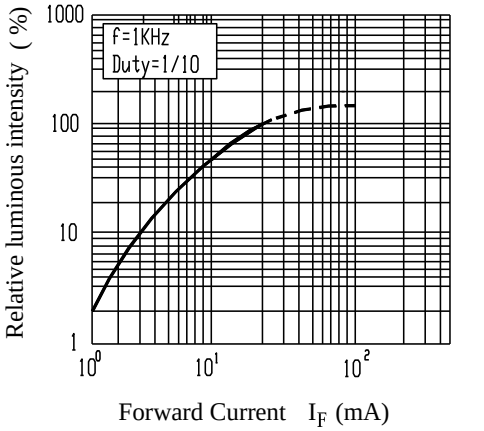

Forward Current Derating Curve

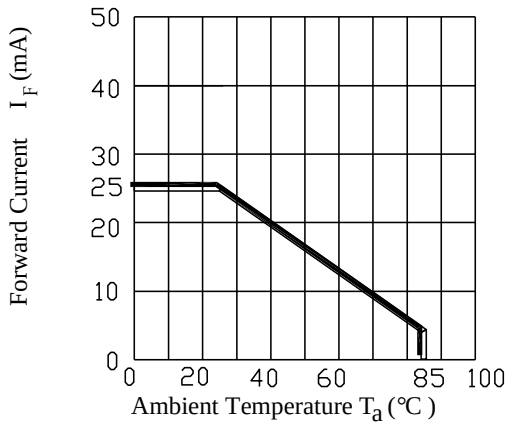

Radiation Diagram

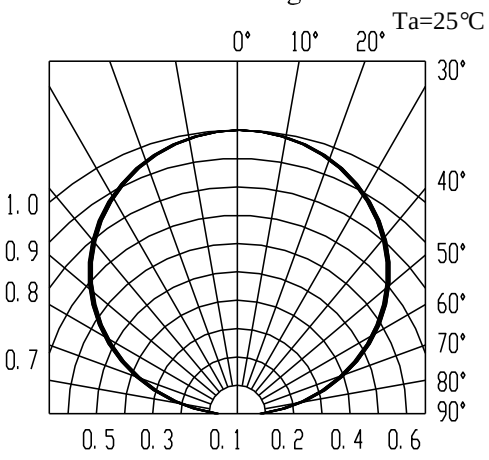

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Package Outline Dimensions

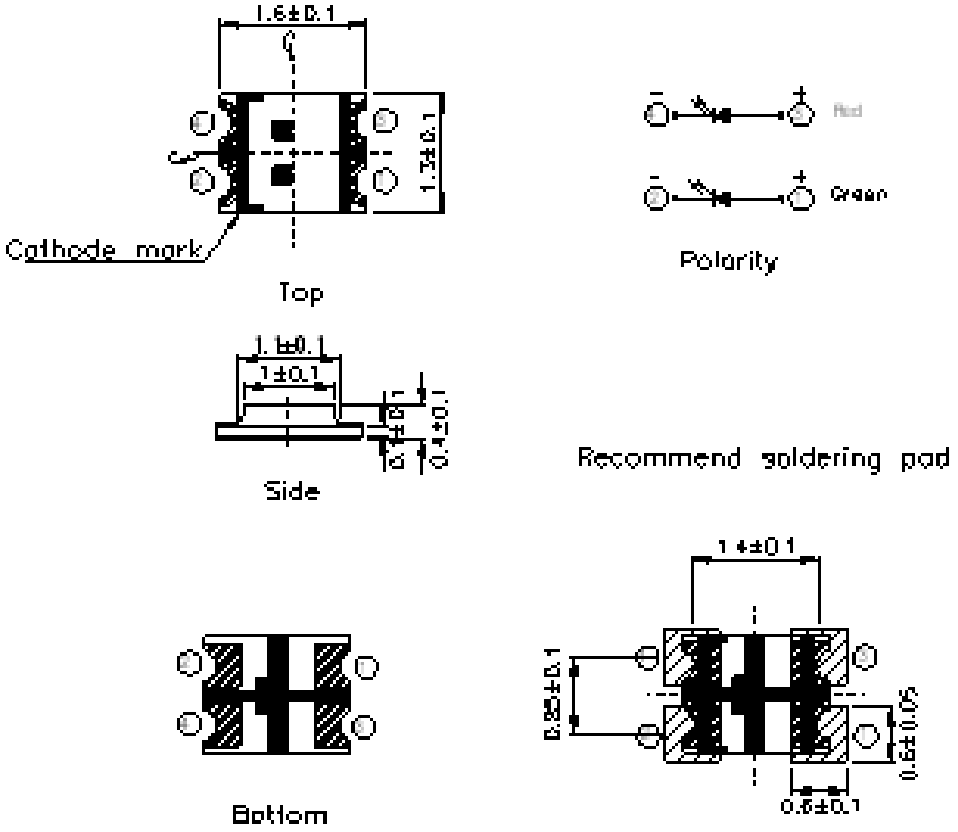

Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Moisture Resistant Packing Materials

Label Explanation

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

Reel Dimensions

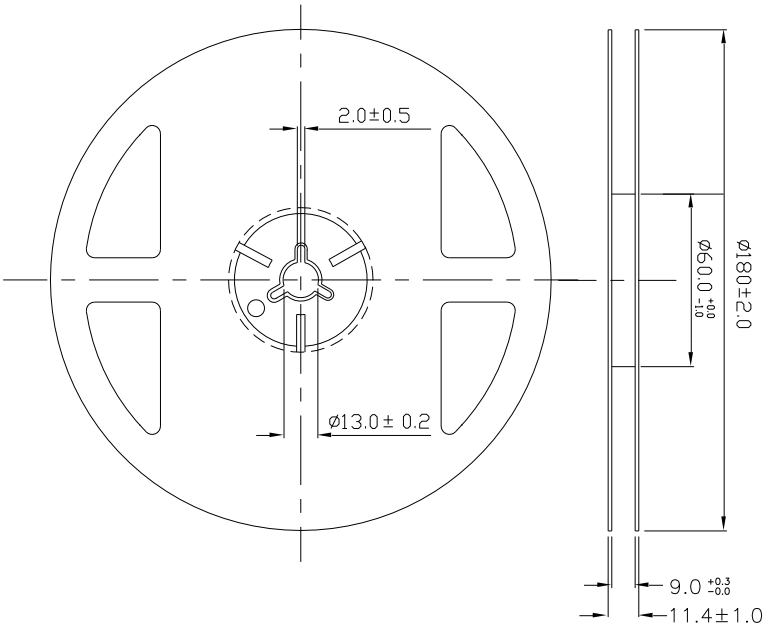

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

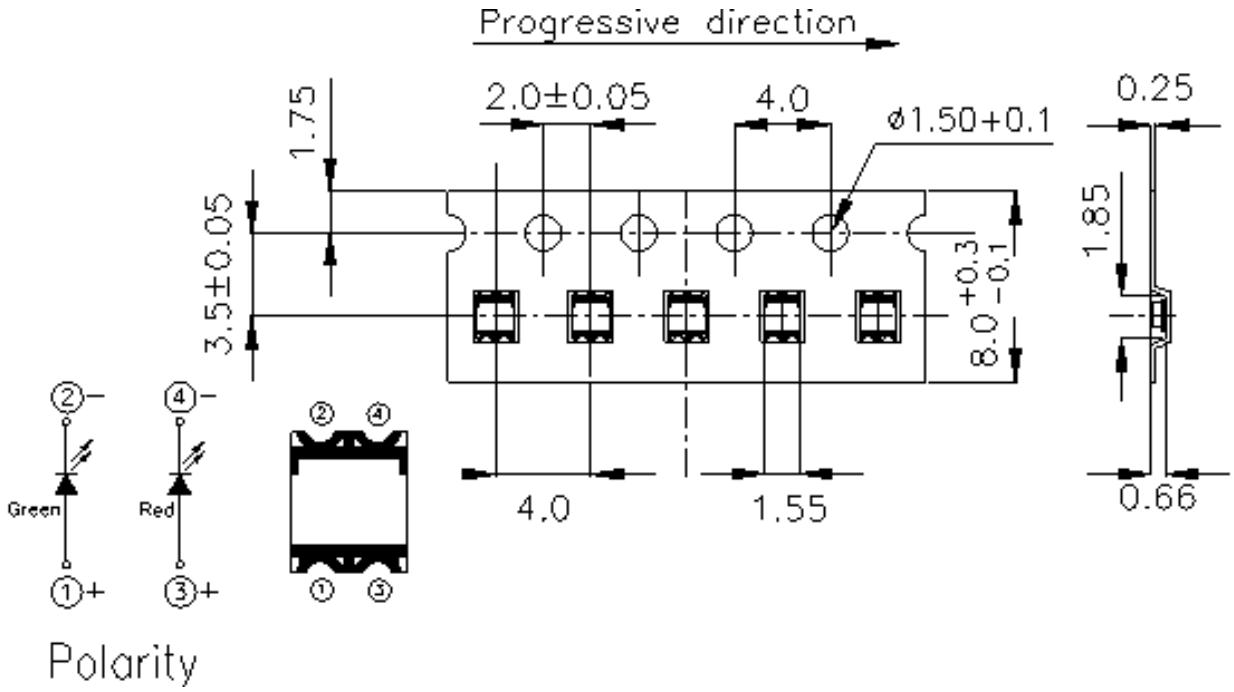

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Moisture Resistant Packaging

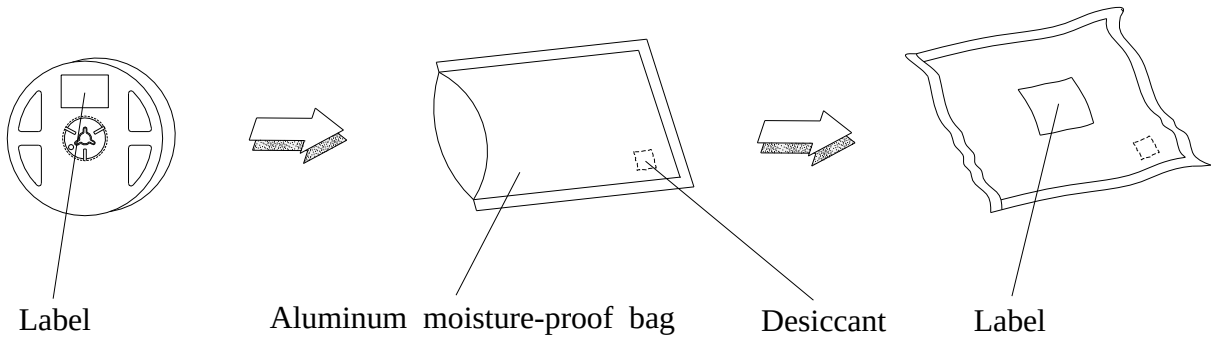

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Precautions For Use

1. Over-current-proof

   Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

   2.1 Do not open moisture proof bag before the products are ready to use.

   2.2 Before opening the package: The LEDs should be kept at 30℃ or less and 90%RH or less.

   2.3 After opening the package: The LED's floor life is 1 year under 30℃ or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

   2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

   Baking treatment : 60±5℃ for 24 hours.

3. Soldering Condition

   3.1 Pb-free solder temperature profile

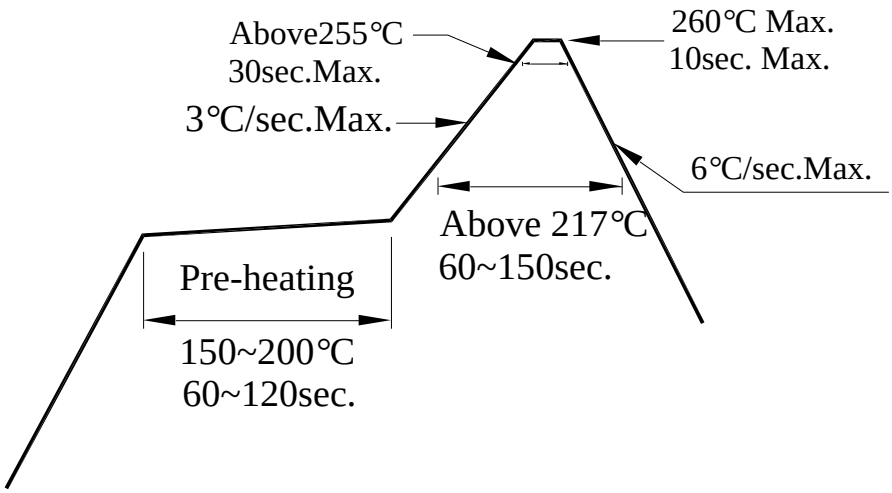

   3.2 Reflow soldering should not be done more than two times.

   3.3 When soldering, do not put stress on the LEDs during heating.

   3.4 After soldering, do not warp the circuit board.

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

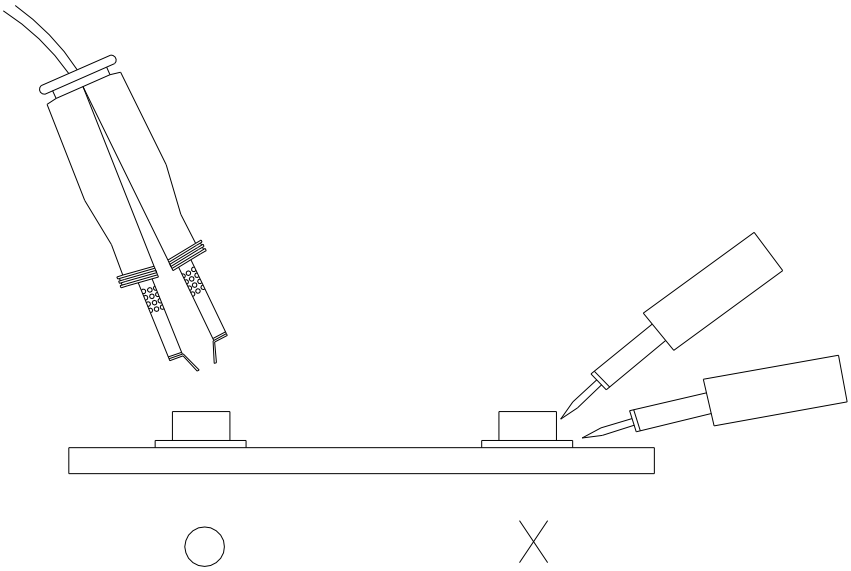

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlightamericas before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

Copyright © 2010, Everlight Americas Inc. All Rights Reserved. Release Date : Nov 28 . 2006. Issue No: 1