


SHEET 1 OF 1

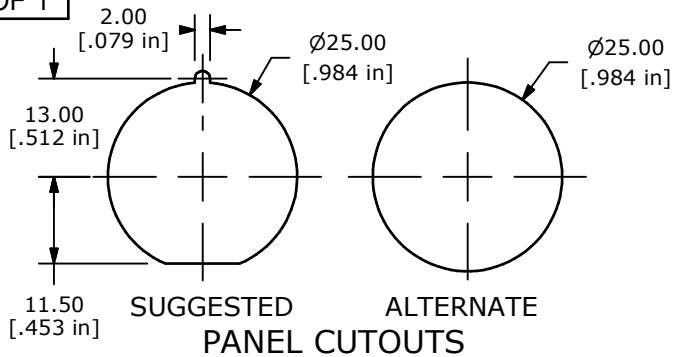


PANEL CUTOUTS

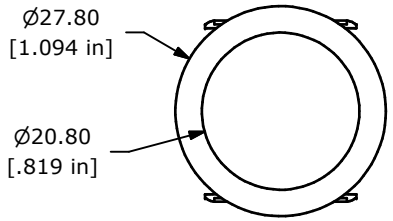

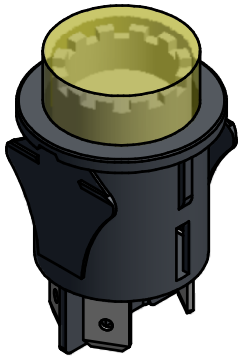



▲


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-3, 2-4



SPDT
CONTACT CONFIGURATION

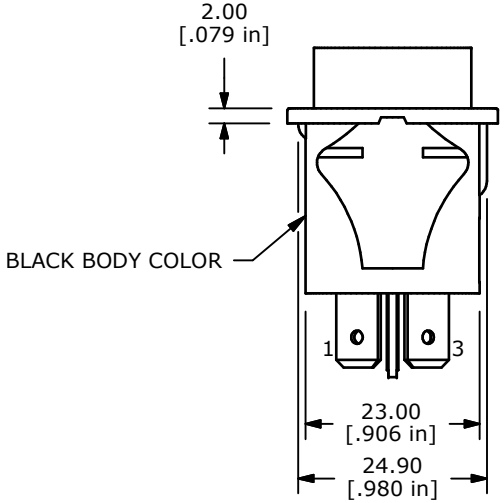

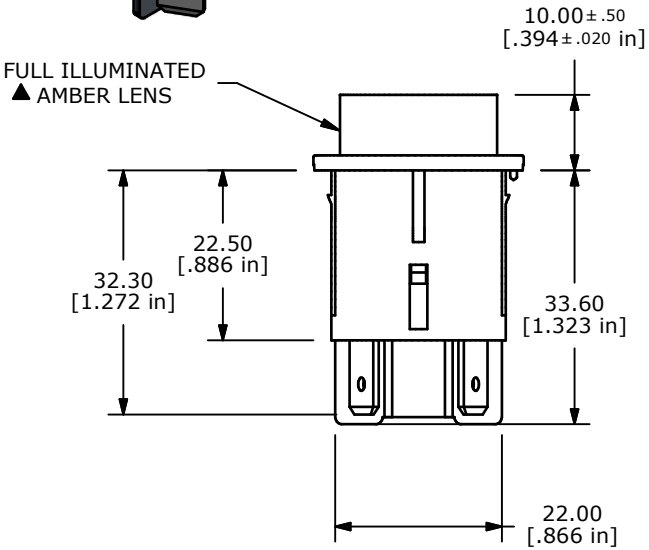

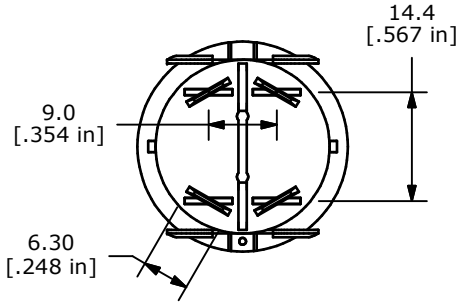

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = 0.4
   X.XX = 0.25
3. TERMINAL NO'S FOR REFERENCE ONLY.
▲4. CONTACT RATINGS:
   ANSI/UL 1054 AND CAN/CSA C22.2 NO.55(E194579)
   16A 125VAC [UR,cUR]
   1/2HP 125VAC, 3/4HP250VAC [UR,cUR]
   EN 61058-1: 2002:
   16(6)A 250V~ 1E4 T125/55 [ENEC14, SEMKO]
   10(4)A 250V~ 5E4 T125/55 [ENEC14, SEMKO]
5. CONTACT RESISTANCE: 35mΩ MAX. INITIAL @ 50VAC
6. INSULATION RESISTANCE: 100MΩ @ 500VDC
7. DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE
8. ELERTICAL LIFE: 6,000 CYCLES [UR,cUR]
   10,000 CYCLES [VDE]
   50,000 CYCLES [VDE]
9. OPERATING TEMP: -20°C TO 105°C [UR,cUR]
   -20°C TO 125°C [VDE]
10. ▲ DENOTE CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT
▲12. ILLUMINATION VOLTAGE: 250V

E·SWITCH®

TITLE PR142C1000-127

SCALE	DATE	DR	DWG	REV
	12/9/2013	EBP	38-PR142C1000127	A

REV	PCR NO	DESCRIPTION	DATE	BY
A	21321	RELEASE TO PRODUCTION	12/9/13	EBP

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED