

PANEL CUTOUT

PANEL THICKNESS	X
0.75 - 1.25	19.2
1.25 - 2.00	19.4
2.00 - 3.00	19.6


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-1a



CIRCUIT: SPST

NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. CONTACT RATINGS: UR, cUR
10A @ 125VAC
EN 61058-1:2002
6A 250V, 1E4, T85
6(2)A 250V, 1E4, T125/55
6. CONTACT RESISTANCE: 35m Ω MAX. @ 50VAC
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ▲ DENOTES CRITICAL PARAMETER
10. 2011/65/EU (ROHS) COMPLIANT

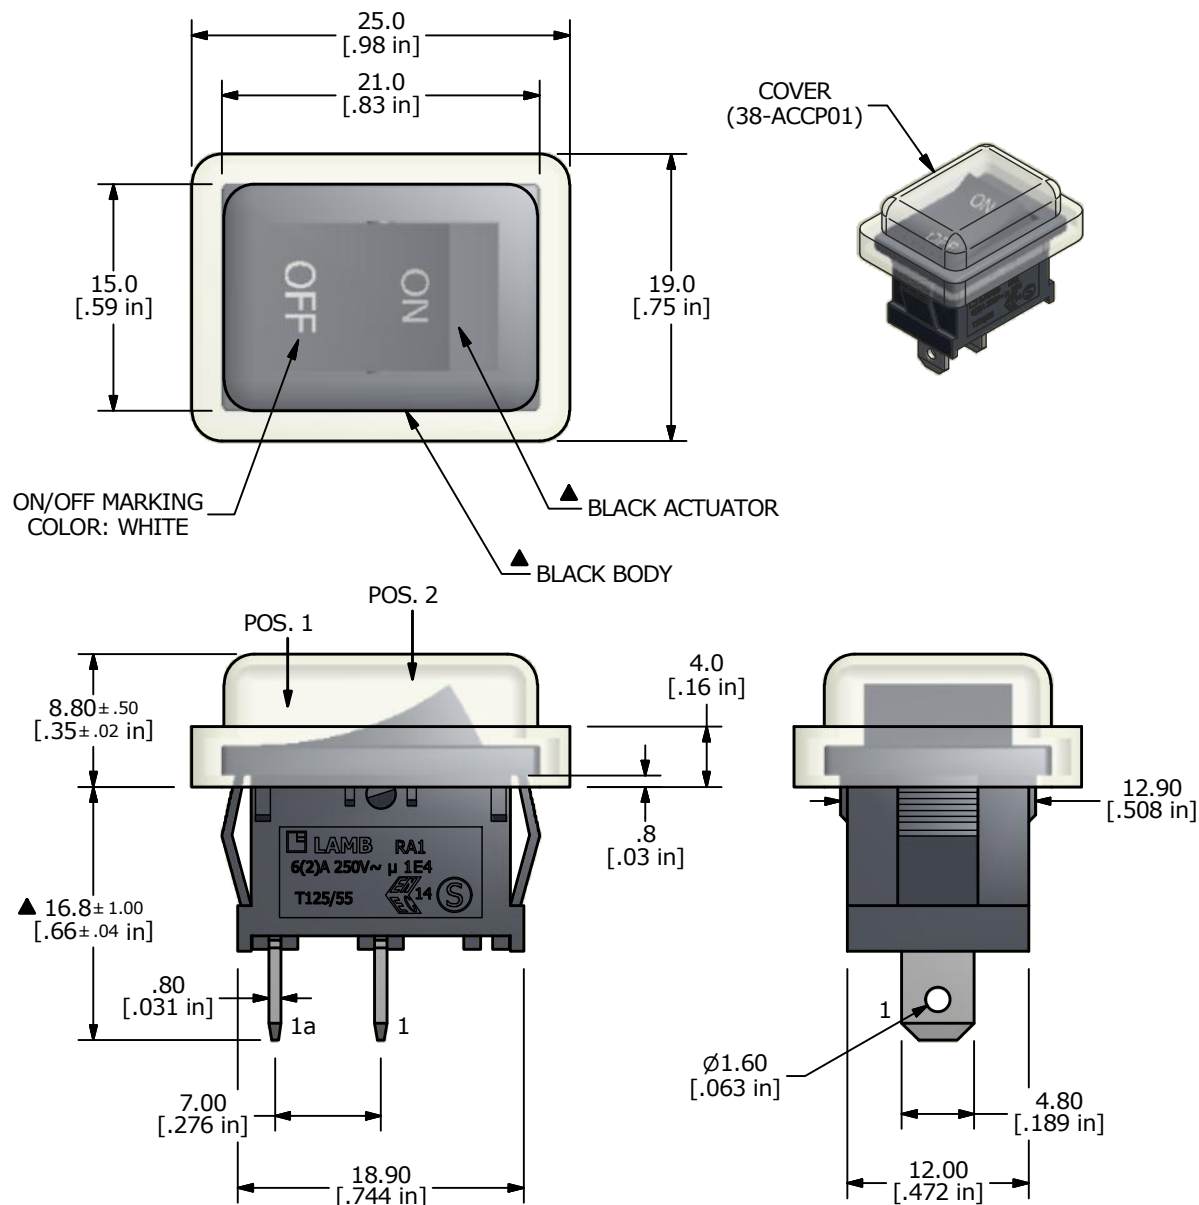

A	23155	NEW RELEASE	1/15/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE RA11131123/ACC-P01

SCALE 2:1	DATE 1/8/2018	DR MW	DWG 38-RA1S00266	REV A
--------------	------------------	----------	---------------------	----------