

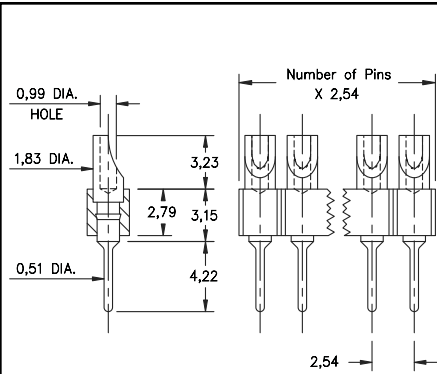


Fig. 1

- Series 380 & 480 use MM #8000 pins. See page 183 for details.
- Series 329 & 429 use MM #2954 pin receptacles and accept pin diameters from 0,38 - 0,64. See page 142 for details.
- Series 329 & 429 receptacles use Hi-Rel, 4 finger BeCu #30 contacts rated at 3 amps. See page 218 for details.
- Solder cups are pre-aligned.
- Insulators are high temp. thermoplastic.

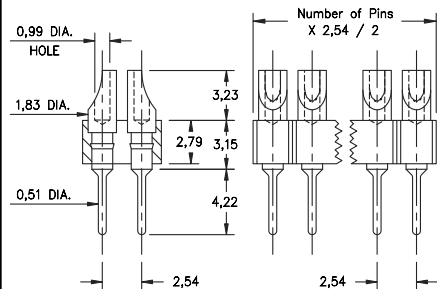
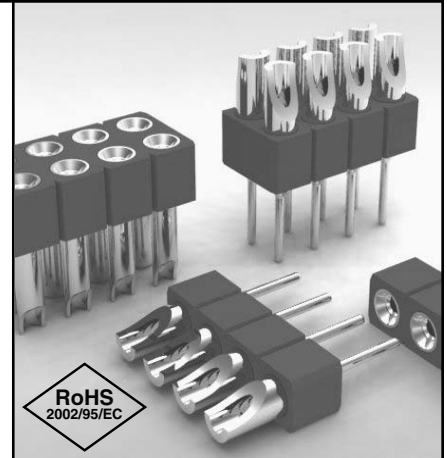


Fig. 2

Ordering Information

Fig. 1

Series 380...001 Solder Cup / Solder Tail

380-XX-1 _ _ -00-001000

Specify # of pins → 01-64

Fig. 2

Series 480...001 Solder Cup / Solder Tail

480-10-2 _ _ -00-001000

Specify # of pins → 02-64

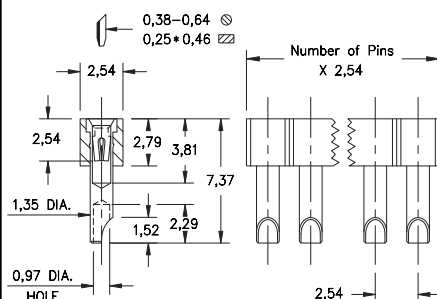


Fig. 3

For Electrical,
Mechanical & Enviromental
Data, See pg. 4

XX=Plating Code
See Below

For RoHS compliance
select ◇ plating code.

SPECIFY PLATING CODE XX=	10 ◇	90 ◇	40 ◇	
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	

Fig. 3

Series 329...540 Solder Cup Sockets

329-43-1 _ _ -41-540000

Specify # of pins → 01-64

Fig. 4

Series 429...540 Solder Cup Sockets

429-43-2 _ _ -41-540000

Specify # of pins → 02-64

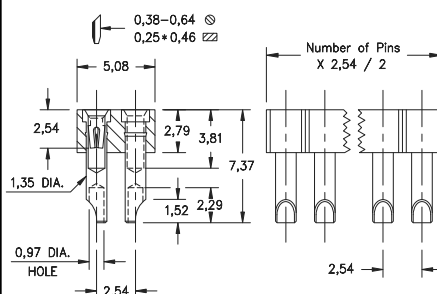


Fig. 4

For Electrical,
Mechanical & Enviromental
Data, See pg. 4

For RoHS compliance
select ◇ plating code.

PLATING CODE =					43 ◇		
Sleeve (Pin)					5,08µm Sn		
Contact (Clip)					0,76µm Au		