

## SERIES 38BT and 38BC


### Sub-Miniature Vertical PC Mount

#### FEATURES

- Actuates at Right Angle to Printed Circuit Board
- Drop-In Replacement for Industry Standard
- SPST and SPDT, Momentary Contact
- Sealed Plunger Option



#### DIMENSIONS In inches (and millimeters)

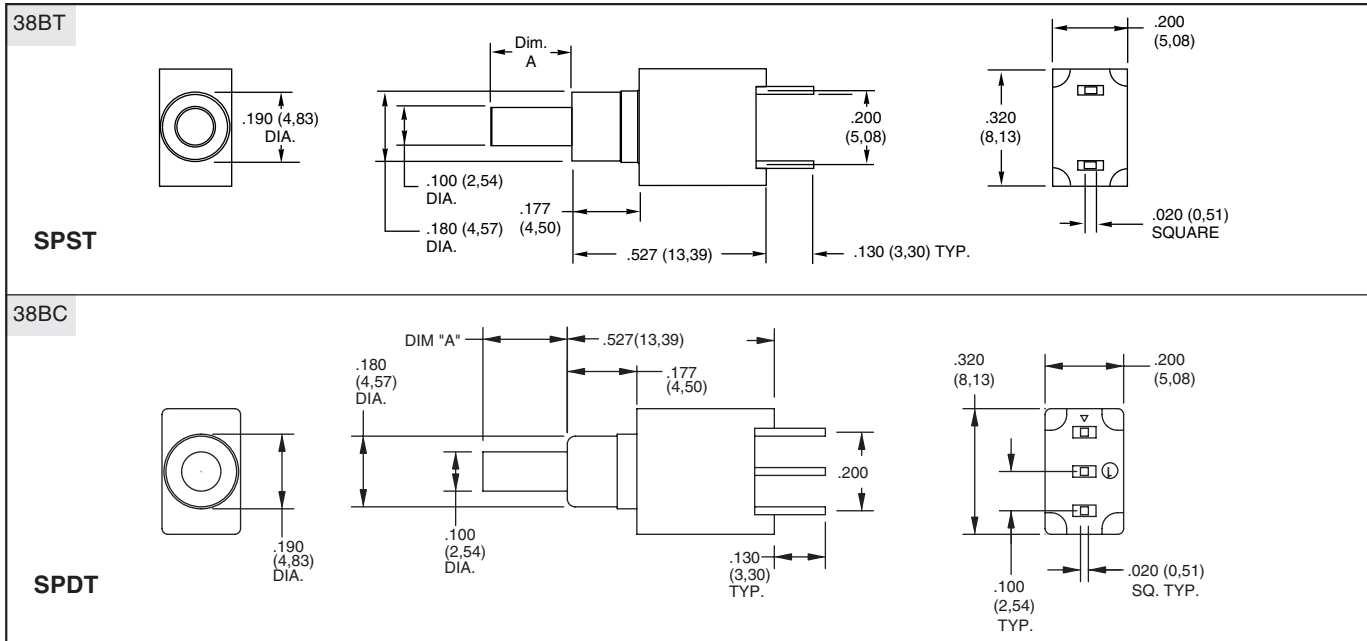

Unless otherwise indicated, tolerances are  $\pm .010$  (0,25)

#### SPECIFICATIONS

##### Electrical Ratings

**Operating Life:** 80,000 make-and-break cycles at full load

##### Contact Rating (resistive load):

**Gold Contacts:** 0.4 VA maximum at 20 Vac or Vdc

**Silver Contacts:** 1.0 Amp maximum at 120 Vac or 28 Vdc

**Contact Resistance:** Below 20 milliohms typical initial at 2-4 Vdc, 100 mA, for both silver and gold-plated contacts

**Insulation Resistance:** 1000 megaohms minimum

**Voltage Breakdown:** 1000 Vrms minimum at sea level

**Operating Temperature:** -30°C. to +85°C.

**Solderability:** Per MIL-STD-202F, Method 208D, or EIA RS-186E, Method 9 (1 hour steam aging)

##### Materials and Finishes

**Base and Cover:** Thermoplastic (UL 94V-0)



**Plunger:** Thermoplastic (UL 94V-0), (S versions include an internal o-ring seal)

**Terminals:** Copper alloy, gold or silver plate (as specified) over nickel plate


**Spring:** Plated music wire

**Contact System:** Copper alloy, gold or silver plate (as specified) over nickel plate

#### CIRCUITRY

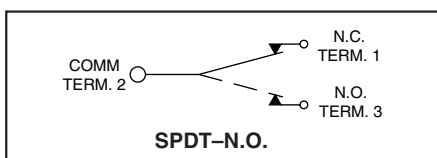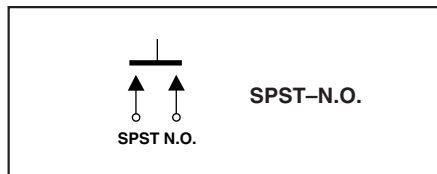

#### ORDERING INFORMATION

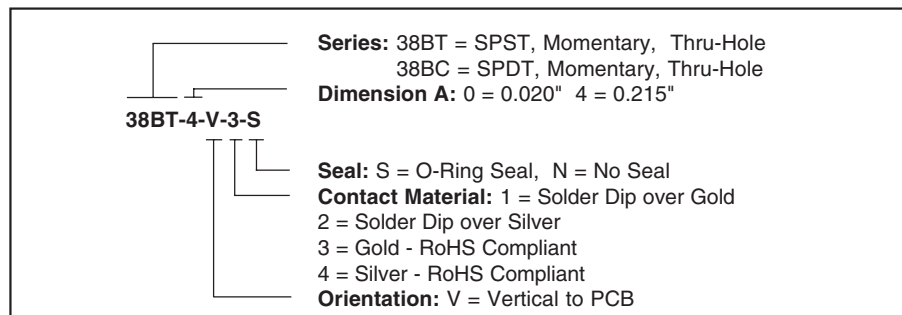

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.