
FGW30N60VD

Discrete IGBT

Discrete IGBT (High-Speed V series)
600V / 30A

Features
Low power loss
Low switching surge and noise
High reliability, high ruggedness (RBSOA, SCSOA etc.)

Applications
Inverter for Motor drive
AC and DC Servo drive amplifier
Uninterruptible power supply

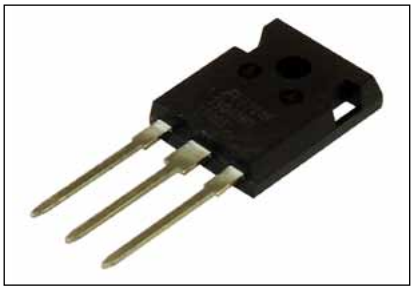


Maximum Ratings and Characteristics

● **Absolute Maximum Ratings (at T_c=25°C unless otherwise specified)**

Items	Symbols	Characteristics	Units	Remarks
Collector-Emitter voltage	V_{CES}	600	V	
Gate-Emitter voltage	V_{GES}	±20	V	
DC Collector Current	$I_{C@25}$	55	A	T_C=25°C, T_j=150°C
	$I_{C@100}$	30	A	T_C=100°C, T_j=150°C
Pulsed Collector Current	I_{CP}	60	A	Note *1
Turn-Off Safe Operating Area	-	60	A	V_{CE}≤600V, T_j≤175°C
Diode Forward Current	$I_{F@25}$	48	A	
	$I_{F@100}$	25	A	
Diode Pulsed Current	I_{FP}	60	A	Note *1
Short Circuit Withstand Time	t_{SC}	10	μs	V_{CC}≤320V, V_{GE}=15V T_j≤150°C
IGBT Max. Power Dissipation	P_{D_IGBT}	230	W	T_C=25°C
FWD Max. Power Dissipation	P_{D_FWD}	125		T_C=25°C
Operating Junction Temperature	T_j	-40~+175	°C	
Storage Temperature	T_{stg}	-55~+175	°C	

Note *1 : Pulse width limited by Tjmax.

Equivalent circuit



● **Electrical characteristics (at T_j= 25°C unless otherwise specified)**

Items	Symbols	Conditions		Characteristics min.	Characteristics typ.	Characteristics max.	Unit
Collector-Emitter Breakdown Voltage	$V_{(BR)CES}$	I_C = 250μA, V_{GE} = 0V		600	-	-	V
Zero Gate Voltage Collector Current	I_{CES}	V_{CE} = 600V, V_{GE} = 0V	T_j=25°C	-	-	250	μA
			T_j=175°C	-	-	10	mA
Gate-Emitter Leakage Current	I_{GES}	V_{CE} = 0V, V_{GE} = ±20V		-	-	200	nA
Gate-Emitter Threshold Voltage	$V_{GE\ (th)}$	V_{CE} = +20V, I_C = 30mA		6.2	6.7	7.2	V
Collector-Emitter Saturation Voltage	$V_{CE\ (sat)}$	V_{GE} = +15V, I_C = 30A	T_j=25°C	-	1.60	2.05	V
			T_j=175°C	-	2.1	-	
Input Capacitance	C_{ies}	V_{CE}=25V		-	1910	-	pF
Output Capacitance	C_{oes}	V_{GE}=0V		-	145	-	
Reverse Transfer Capacitance	C_{res}	f=1MHz		-	105	-	
Gate Charge	Q_G	V_{CC} = 400V I_C = 30A V_{GE} = 15V		-	225	-	nC
Turn-On Delay Time	$t_{d(on)}$	T_j = 25°C		-	35	-	ns
Rise Time	t_r	V_{CC} = 400V		-	60	-	
Turn-Off Delay Time	$t_{d(off)}$	I_C = 30A		-	200	-	
Fall Time	t_f	V_{GE} = 15V		-	38	-	
Turn-On Energy	E_{on}	R_G = 10Ω		-	1.2	-	mJ
Turn-Off Energy	E_{off}	L = 500μH Energy loss include “tail” and FWD reverse recovery.		-	0.7	-	
Turn-On Delay Time	$t_{d(on)}$	T_j = 175°C		-	36	-	ns
Rise Time	t_r	V_{CC} = 400V		-	60	-	
Turn-Off Delay Time	$t_{d(off)}$	I_C = 30A		-	235	-	
Fall Time	t_f	V_{GE} = 15V		-	50	-	
Turn-On Energy	E_{on}	R_G = 10Ω		-	2.0	-	mJ
Turn-Off Energy	E_{off}	L = 500μH Energy loss include “tail” and FWD reverse recovery.		-	1.2	-	
Forward Voltage Drop	V_F	I_F=25A	T_j=25°C	-	1.5	1.95	V
			T_j=175°C	-	1.3	-	V
Diode Reverse Recovery Time	t_{rr1}	V_{CC}=30V I_F = 2.5A -di/dt=200A/μs		-	40	52	ns
Diode Reverse Recovery Time	t_{rr2}	V_{CC}=400V I_F=25A		-	0.30	-	μs
Diode Reverse Recovery Charge	Q_{rr}	-di_F/dt=200A/μs T_j=25°C		-	0.70	-	μC


Items	Symbols	Conditions	Characteristics			Unit
			min.	typ.	max.	
Diode Reverse Recovery Time	t_{rr2}	V_{CC}=400V I_F=25A -di$_F$/dt=200A/μs T_j=175°C	-	0.44	-	μs
Diode Reverse Recovery Charge	Q_{rr}		-	2.7	-	μC

● **Thermal resistance**


Items	Symbols	Characteristics			Unit
		min.	typ.	max.	
Thermal Resistance, Junction-Ambient	$R_{th(j-a)}$	-	-	50	°C/W
Thermal Resistance, IGBT Junction to Case	$R_{th(j-c)_IGBT}$	-	-	0.641	
Thermal Resistance, FWD Junction to Case	$R_{th(j-c)_FWD}$	-	-	1.191	

■ Characteristics (Representative)


Graph.1
DC Collector Current vs T_C
V_{GE}≥+15V, T_j≤175°C

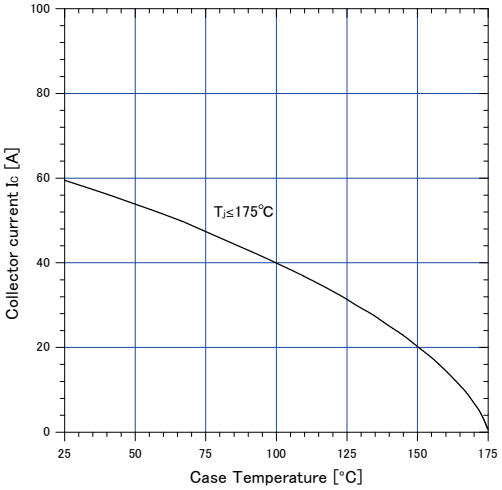


Graph.2
Collector Current vs. switching frequency
V_{GE}=+15V, T_C≤175°C, V_{CC}=400V, D=0.5,
R_G=10Ω, T_C=100°C

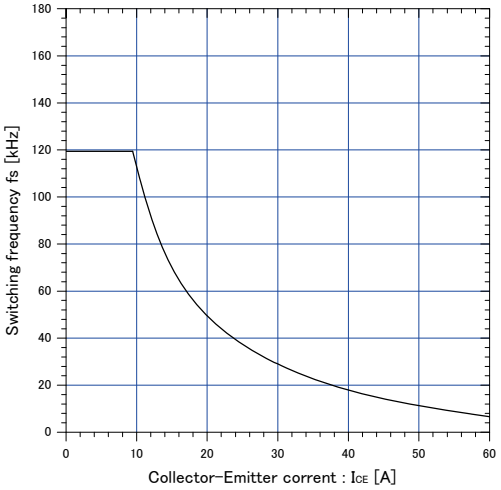


Graph.3
Typical Output Characteristics (V_{CE}-I_C)
T_j=25°C

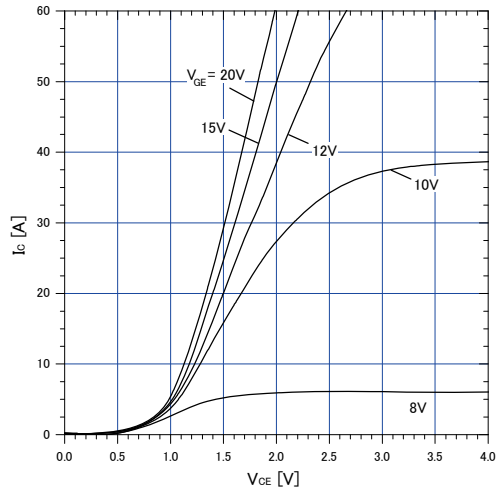


Graph.4
Typical Output Characteristics (V_{CE}-I_C)
T_j=175°C

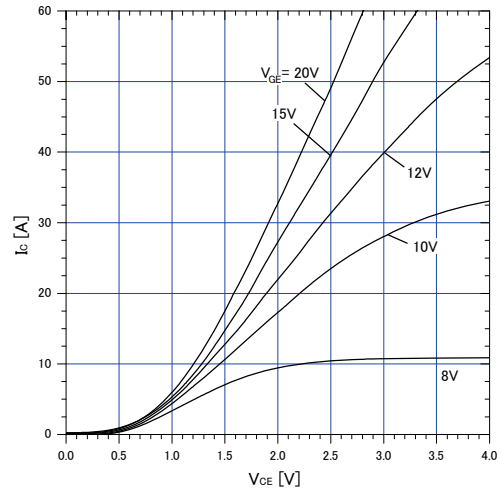


Graph.5
Typical Transfer Characteristics
V_{GE}=+15V

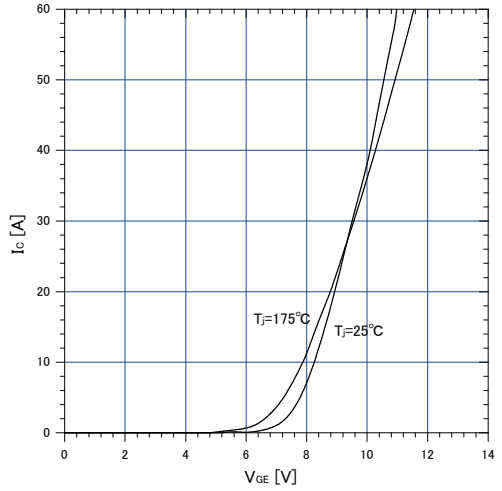


Graph.6
Gate Threshold Voltage vs. T_j
I_C=30mA, V_{CE}=20V

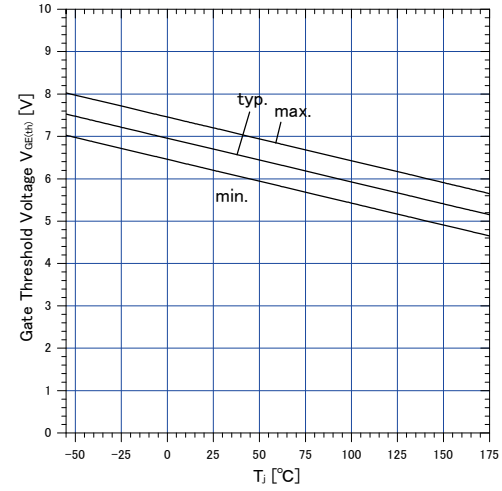


Graph.7
Typical Capacitance
V_{GE}=0V, f=1MHz, T_j=25°C

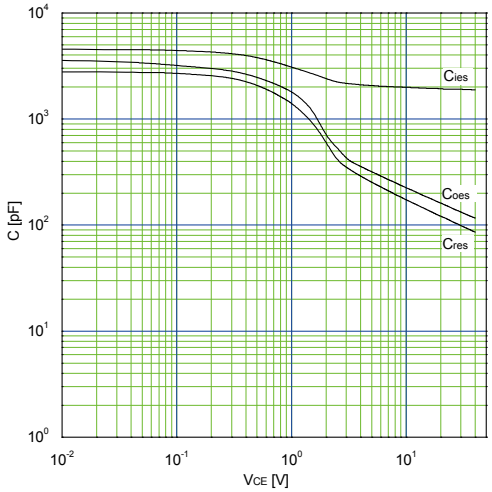


Graph.8
Typical Gate Charge
V_{CC}=400V, I_C=30A, T_j=25°C

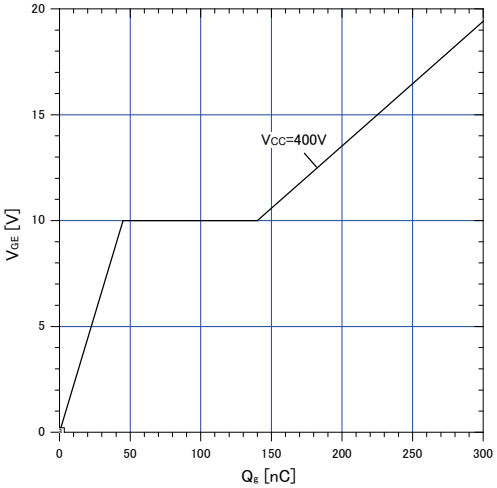


Graph.9
Typical switching time vs. I_C
T_j=175°C, V_{CC}=400V, L=500µH
V_{GE}=15V,R_G=10Ω

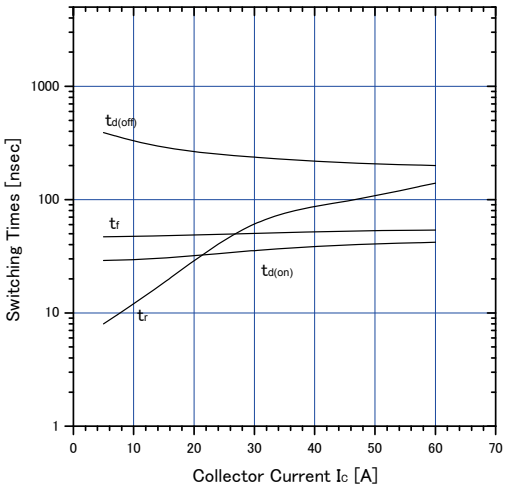


Graph.10
Typical switching time vs. R_G
T_j=175°C, V_{CC}=400V, I_C=30A, L=500µH
V_{GE}=15V

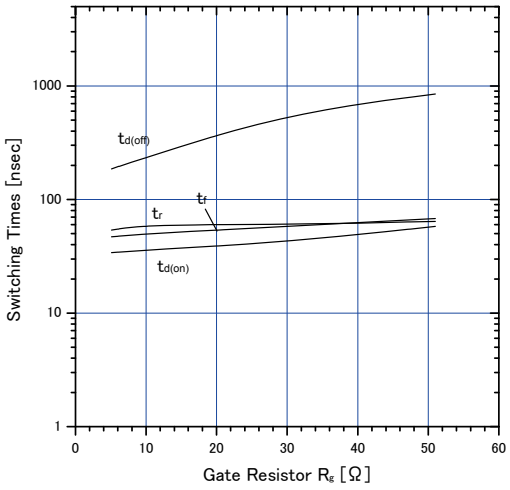


Graph.11
Typical switching losses vs. I_C
T_j=175°C, V_{CC}=400V, L=500µH
V_{GE}=15V, R_G=10Ω

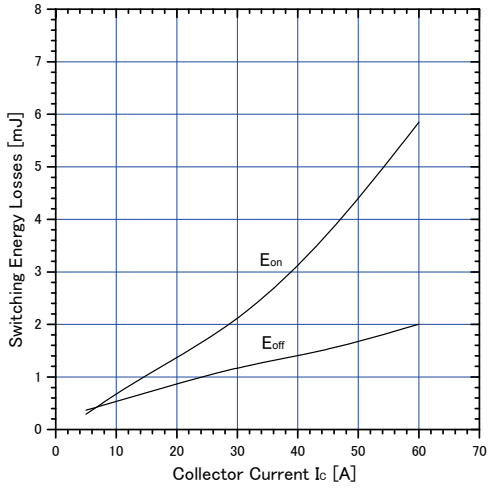


Graph.12
Typical switching losses vs. R_G
T_j=175°C, V_{CC}=400V, I_C=30A, L=500µH
V_{GE}=15V

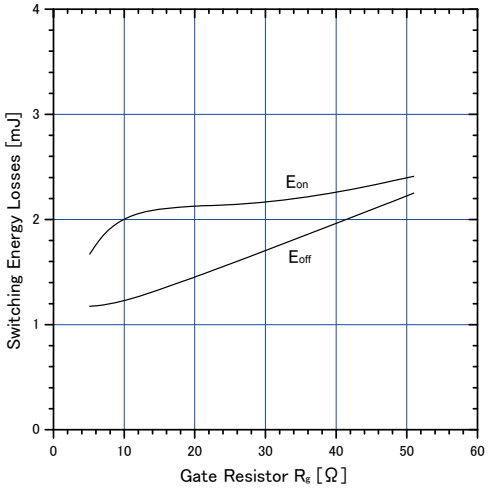


Graph.13
FWD Forward voltage drop (V_F-I_F)

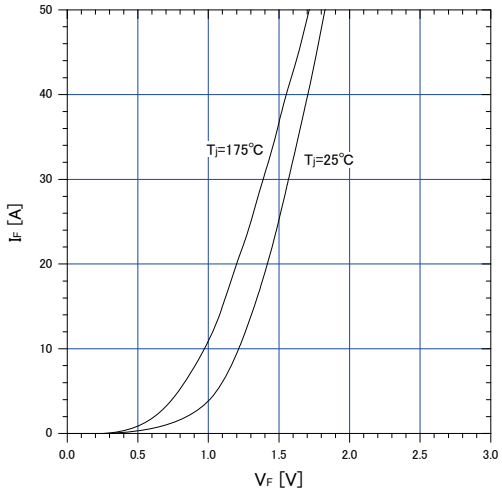


Graph.14
Typical reverse recovery characteristics vs. I_F
T_J=175°C, V_{CC}=400V, L=500μH,
V_{GE}=15V,R_G=10Ω

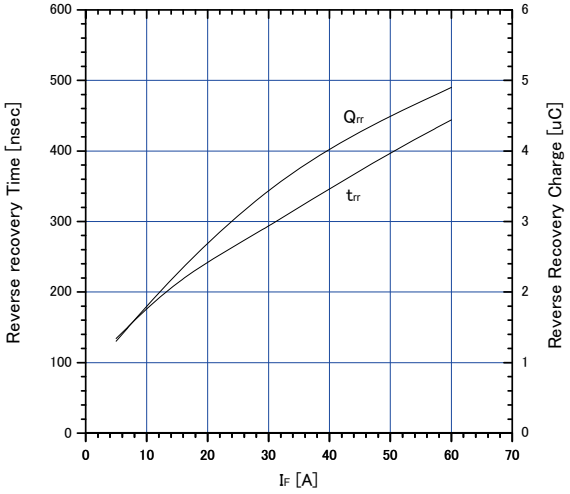


Graph.15
Typical reverse recovery loss vs. I_F
T_j=175°C,V_{CC}=400V,L=500μH
V_{GE}=15V,R_G=10Ω

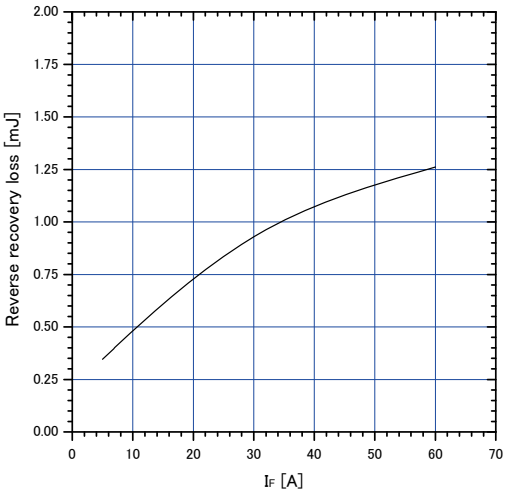


Graph.16
Reverse biased Safe Operating Area
T_j≦175°C,V_{GE}=+15V/0V,R_G=10Ω

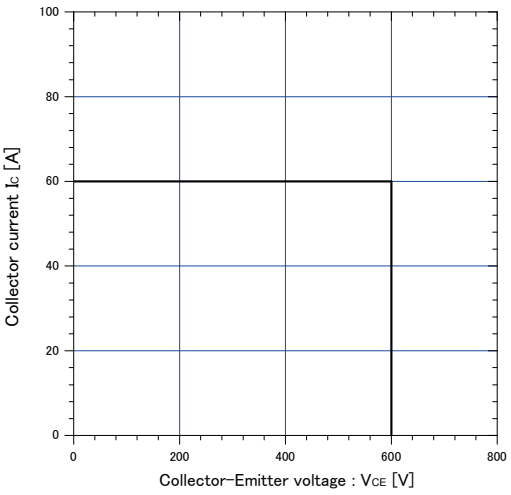

Graph.17
Transient thermal resistance of IGBT

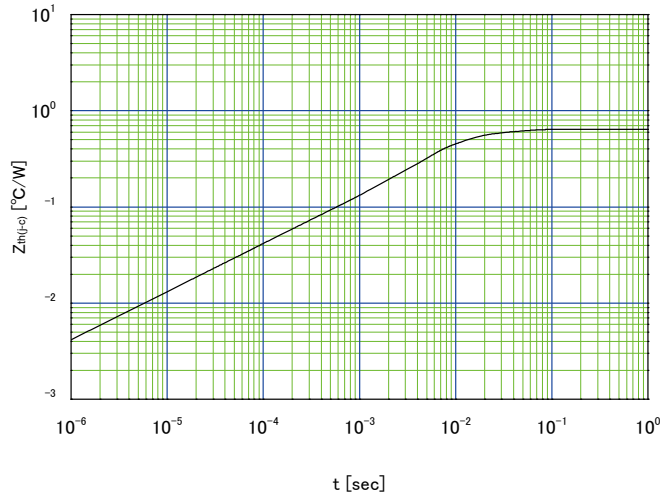



Graph.18
Transient thermal resistance of FWD

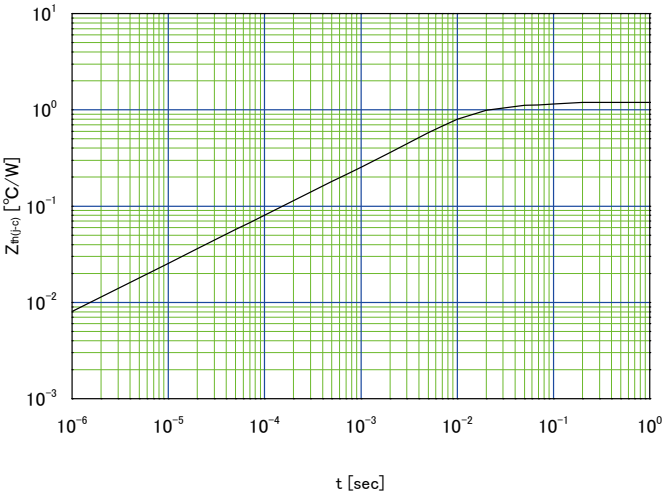

■ Outline Drawings, mm

Outview : TO-247 Package

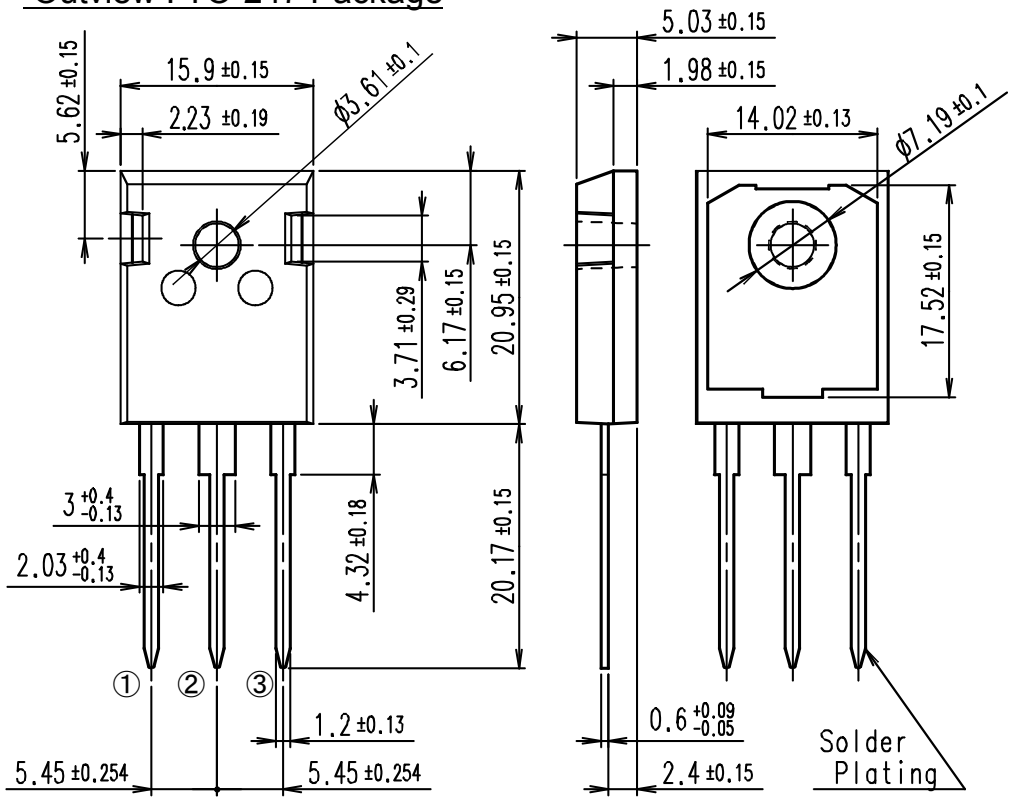



CONNECTION
① GATE
② COLLECTOR
③ EMITTER

DIMENSIONS ARE IN MILLIMETERS.

WARNING

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of May 2011.
The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sur to obtain the latest specifications.

2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.

3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design failsafe, flame retardant, and free of malfunction.

4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
- Computers
- OA equipment
- Communications equipment (terminal devices)
- Measurement equipment
- Machine tools
- Audiovisual equipment
- Electrical home appliances
- Personal equipment
- Industrial robots etc.

5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
- Transportation equipment (mounted on cars and ships)
- Trunk communications equipment
- Traffic-signal control equipment
- Gas leakage detectors with an auto-shut-off feature
- Emergency equipment for responding to disasters and anti-burglary devices
- Safety devices
- Medical equipment

6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
- Space equipment
- Aeronautic equipment
- Nuclear control equipment
- Submarine repeater equipment

7. Copyright ©1996-2011 by Fuji Electric Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.

8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.