CMA806

AWS / BAS Interference Mitigation Filter

Revision 3 • February 1, 2012

Passband 1:	**2030 – 2109.5 MHz**	
Insertion Loss:	**2.20 dB max.**	
Return Loss:	**15 dB min.**	
Passband 2:	**2450 – 2500 MHz**	
Insertion Loss:	**0.3 dB max.**	
Return Loss:	**18.0 dB min.**	
Rejection:	**60 dB min**	**2110.6 – 2121.5 MHz**
Connectors:	**Type "N" Female**	
Operational Temp:	**+20°C to +40°C**	
Finish:	**Unpainted, Silver Finish**	

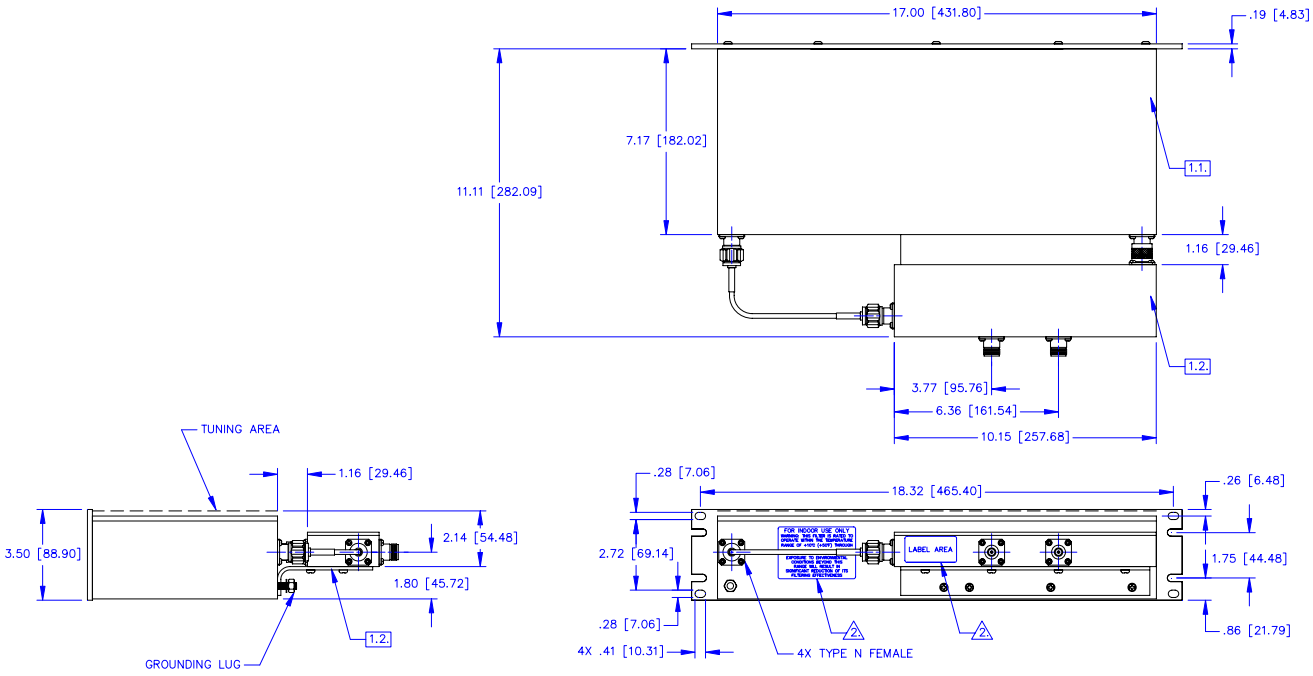

Commercial Microwave Technology, Inc.
11335 Sunrise Gold Circle, Suite B • Rancho Cordova, CA 95742
Phone: 916-631-4363 • Fax: 916-631-4364
www.cmtfilters.com