

LDO06C SERIES

Single Output

6 A current rating

Input voltage range 3-13.8 V

Adjustable output voltage 0.59-5.1 V

- Optional 3-pin model factory set
- Optional 5-pin model factory set with power good option

Excellent transient response

Power enable (5-pin model)

Minimum airflow

Small package

Termination voltage capacity

RoHS Compliant

The LDO06C is a new high density, open frame, non-isolated converter for space sensitive applications. This model has a wide input range of 3-13.8 V and offers a 0.59-5.1 V adjustable output with 6 A capability. Typical efficiency for this model is 92% (5 Vin, 2.5 Vout, 6 A load). The 5-pin version of this voltage device offers the additional features of enable, and with a default wide adjustable output voltage range or option of power good.

[2 YEAR WARRANTY]



Stresses in excess of the maximum ratings can cause permanent damage to the device. Operation of the device is not implied at these or any other conditions in excess of those given in the specification. Exposure to absolute maximum ratings can adversely affect device reliability.

Absolute Maximum Ratings

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input voltage - continuous	V_{in} (cont)	3.0		13.8	Vdc	$V_{in(+)} - V_{in(-)}$
Enable Voltage	V_{En} (max)			3.3 5.0	V V	When $V_{in} < 5$ V When $V_{in} > 5$ V
Pgood Voltage	V_{Pgood} (max)			3.3 5.0	V V	When $V_{in} < 5$ V When $V_{in} > 5$ V
Operating temperature	T_{Op}	0		70	°C	Measured at thermal reference points, See Note 1. See Derating curves
Storage temperature	$T_{Storage}$	-40		125	°C	
Output current	I_{out} (max)			6	A	

All specifications are typical at nominal input $V_{in} = 5$ V and 12 V, full load under any resistive load combination at 25 °C, unless otherwise stated.

Input Characteristics

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input voltage - operating	V_{in}	3.0		13.8	Vdc	
Input current - no load	I_{in}		90		mA	V_{in} (min) - V_{in} (max), enabled
Input current - quiescent	$I_{in(off)}$		10		mA	Converter disabled
Input voltage variation	dv/dt		1.0		V/ms	Product was tested at 1.2 V/ms. Much higher dv/dt is possible (>10 V/ms)

Turn On/Off

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input voltage - turn on	V_{in} (on)		2.8		Vdc	See App Note 186 to adjust this point
Input voltage - turn off	V_{in} (off)		2.5		Vdc	
Turn on delay - enabled, then power applied	T_{delay} (power)		2	3	ms	With the Remote ON/OFF signal asserted, this is the time from when the input voltage reaches the minimum specified operating voltage until V_{out} is in regulation
Turn on delay - power applied, then Remote ON/OFF asserted	T_{delay} (Remote ON/OFF)		2	3	ms	$V_{in} = V_{in(on)}$, then Remote ON/OFF asserted. This is the time taken until V_{out} is in regulation
Rise time	T_{rise}		1.3	2	ms	From 10% to 90%; full resistive load, 0 μ F capacitance

Signal Electrical Interface

Characteristic - Signal Name	Symbol	Min	Typ	Max	Units	Notes and Conditions
Remote ON/OFF						See Application Note 186
Control pin open circuit voltage	V_{ih}				Vdc	$I_{ih} = 0 \mu A$; open circuit voltage See Notes 2 and 3
3.3 V			0.61			
5 V			0.92			
12 V			2.20			
High level input current	I_{ih}		1		μA	Current flowing into control pin when pin is pulled high (max. at $V_{ih} = 5 V$)
High level input voltage	V_{ih}	0.502			Vdc	Converter guaranteed on when control pin is greater than V_{ih} (min)
Low level input voltage	V_{il}			0.200	Vdc	Converter guaranteed off when control pin is less than V_{il} (max)
Low level input current	I_{il} (max)				μA	$V_{il} = 0 Vdc$
3.3 V			110			
5 V			166			
12 V			398			

Reliability and Service Life

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Mean time between failure	MTBF				Hours	MIL-HDBK-217F $V_{in} = V_{in}$ (nom); $I_{out} = I_{out}$ (max); ambient 25 °C; ground benign environment
Mean time between failure	MTBF	8,392,808			Hours	Telcordia SR-332 Issue 2, ground benign, ambient 40 °C, $V_{in} = V_{in}$ (nom)- $I_{out} = I_{out}$ (max)

Other Specifications

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Switching frequency	F _{sw}		750		kHz	
Weight			1.899		g	

Environmental Specifications

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Thermal performance		0	0	70	°C	(See Note 1 and individual derating curves)
Type	Parameter	Reference	Test Level	Notes and Conditions		
Air temperature operating	10 °C to 70 °C					Max. rate of change is 30 degrees per hour while operating and 20 degrees per hour while non-operating
Air temperature non-operating	-40 °C to 120 °C					
Relative humidity - operating	80%					With non-condensing Excluding rain during parts shipment
Relative humidity - non-operating	100%					
Vibration - operating						Sinusoidal vibration, 0.5 G (0 to peak) acceleration
Vibration - non-operating						Sinusoidal vibration, 1.0 G (0 to peak)
Shock	Acceleration					40 G, square wave at 200 in/s (508 cm/s); on all six sides Half sine pulse for 70 in/s (178 cm/s) for 2 ms; on all sides except top Half sine pulse for 40 in/s (102 cm/s) for 2 ms; on all sides except top
Non-operating square wave						
Non-operating half sine						
Operating half sine						

Safety Agency Approvals

Characteristic	
UL/cUL	UL/cUL60950
TÜV Product Service	IEC 60950

Material Ratings

Characteristic Signal Name	Notes and Conditions
Flammability rating	UL94V-0
Material type	FR4 PCB

Model Numbers

Model Number	Input Voltage	Output Voltage	Output Current (Max.)	Efficiency at Full Load	Max. Load Regulation
LDO06C-005W05-SJ	3.0-13.8 V	0.59-5.1 V	6 A	92%	±0.5%
LDO06C-005W05-HJ	3.0-13.8 V	0.59-5.1 V	6 A	92%	±0.5%
LDO06C-005W05-VJ	3.0-13.8 V	0.59-5.1 V	6 A	92%	±0.5%

RoHS Compliance Ordering Information



The 'J' at the end of the part number indicates that the part is Pb-free (RoHS 6/6 compliant). TSE RoHS 5/6 (non PB-free) compliant versions may be available on special request, please contact your local sales representative for details.

3.3 V, 5 V, 12 V Model
0.9 V Setpoint

Input Characteristics

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input current - operating						
(Source) (3.3 V)	I_{in}		1.375		Adc	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (max)$
(Sink) (3.3 V)	I_{in}		-1.330		Adc	
(Source) (5 V)	I_{in}		0.909		Adc	
(Sink) (5 V)	I_{in}		-0.980		Adc	
(Source) (12 V)	I_{in}		0.350		Adc	
(Sink) (12 V)	I_{in}		-0.328		Adc	
Input capacitance - internal filter	C_{input}		22		μF	
Input capacitance - external filter	C_{bypass}		1		μF	Recommended customer added capacitance

3.3 V, 5 V, 12 V Model
0.9 V Setpoint

Electrical Characteristics
- O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Nominal set-point voltage	$V_o (nom)$	0.891	0.9	0.909	Vdc	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (nom)$
Line regulation				± 0.2	%	$I_{out} = I_{out} (nom)$; $V_{in} (min)$ to $V_{in} (max)$
Load regulation				± 0.5	%	$V_{in} = V_{in} (nom)$; $I_{out} (min)$ to $I_{out} (max)$
Output current - continuous	I_{out}	0		6.0	Adc	
Output current - short circuit	I_{sc}		13.5		Adc	Continuous, unit auto recovers
Output voltage - noise						See Application Note 186 for more information
(3.3 V)	V_{p-p}			20	mV pk-pk	Measurement band width 20 MHz See Application Note 186 for details
(5.0 V)	V_{p-p}			20	mV pk-pk	
(12 V)	V_{p-p}			20	mV pk-pk	

3.3 V, 5 V, 12 V Model
0.9 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Load transient response - peak deviation	$V_{dynamic}$		120		mV	Peak deviation for 50% to 100% step load, $di/dt = 10 A/\mu s$
Load transient response - recovery	$T_{recovery}$		8		μs	Settling time to within 1% of output set-point voltage for 50% to 75% step load
External load capacitance	C_{ext}		0	8000	μF	See Application Note 186 for output capacitance vs. stability

3.3 V, 5 V, 12 V Model
0.9 V SetpointProtection and Control
Features

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Overcurrent limit inception	I _{OC}		14.5		Adc	Vo = 90% of Vo (nom)

3.3 V, 5 V, 12 V Model
0.9 V Setpoint

Efficiency

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Efficiency 3.3 V (source mode) 3.3 V (sink mode)	η	81	83 86		%	I _{out} = 100% (max) Vin - Vin (nom)
Efficiency 5.0 V (source mode) 5.0 V (sink mode)	η	82	84 81		%	
Efficiency 12 V (source mode) 12 V (sink mode)	η	75	77 71		%	
Efficiency 3.3 V (source mode) 3.3 V (sink mode)	η	85	87 84		%	I _{out} = 50% (max) Vin - Vin (nom)
Efficiency 5.0 V (source mode) 5.0 V (sink mode)	η	84	86 81		%	
Efficiency 12 V (source mode) 12 V (sink mode)	η	73	75 72		%	

3.3 V, 5 V, 12 V Model 2.5 V Setpoint

Input Characteristics

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input current - operating						
(Source) (3.3 V)	I_{in}		4.25		Adc	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (max)$; $V_o = V_o (nom)$
(Sink) (3.3 V)	I_{in}		-4.10		Adc	
(Source) (5 V)	I_{in}		2.78		Adc	
(Sink) (5 V)	I_{in}		-2.71		Adc	
(Source) (12 V)	I_{in}		1.10		Adc	
(Sink) (12 V)	I_{in}		-1.08		Adc	
Input capacitance - internal filter	C_{input}		22		μF	Internal to converter
Input capacitance - external filter	C_{bypass}		1		μF	Recommended customer added capacitance

3.3 V, 5 V, 12 V Model 2.5 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Nominal set-point voltage	$V_o (nom)$	2.475	2.500	2.525	Vdc	$V_{in} = V_{in} (nom)$; $I_{out} = I_{out} (nom)$
Line regulation				± 0.2	%	$I_{out} = I_{out} (nom)$; $V_{in} (min)$ to $V_{in} (max)$
Load regulation				± 0.5	%	$V_{in} = V_{in} (nom)$; $I_{out} (min)$ to $I_{out} (max)$
Output current - continuous	I_{out}	0		6.0	Adc	
Output current - short circuit	I_{sc}		13.5		Apk	Continuous, unit auto recovers from short
Output voltage - noise V_{rms}						
(3.3 V)	V_{p-p}			20	mV pk-pk	Measurement band width 20 MHz See Application Note 186 for details
(5.0 V)	V_{p-p}			25	mV pk-pk	
(12 V)	V_{p-p}			35	mV pk-pk	

3.3 V, 5 V, 12 V Model 2.5 V Setpoint

Electrical Characteristics - O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Load transient response - peak deviation	$V_{dynamic}$		130		mV	Peak deviation for 50% to 100% step load, $di/dt = 10 A/s$
Load transient response - recover	$T_{recovery}$		8		μs	Settling time to within 1% of output set point voltage for 50% to 75% step load
External load capacitance	C_{ext}		0	3500	μF	See Application Notes 186 for output capacitance values vs. stability

3.3 V, 5 V, 12 V Model
2.5 V Setpoint

Protection and Control
Features

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Overcurrent limit inception	I _{oc}		11		Adc	Vo = 90% of Vo (nom)

3.3 V, 5 V, 12 V Model
2.5 V Setpoint

Efficiency

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Efficiency 3.3 V (source mode) 3.3 V (sink mode)	η	91	93 93		%	I _{out} = 100% (max) Vin - Vin (nom)
Efficiency 5.0 V (source mode) 5.0 V (sink mode)	η	91	93 89		%	
Efficiency 12 V (source mode) 12 V (sink mode)	η	86	88 83		%	
Efficiency 3.3 V (source mode) 3.3 V (sink mode)	η	93	95 95		%	I _{out} = 50% (max) Vin - Vin (nom)
Efficiency 5.0 V (source mode) 5.0 V (sink mode)	η	91	93 91		%	
Efficiency 12 V (source mode) 12 V (sink mode)	η	83	85 89		%	

12 V Model
5 V Setpoint

Input Characteristics

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Input current - operating			2.70		Adc	$V_{in} = V_{in}(\text{nom}); I_{out} = I_{out}(\text{max}); V_o = V_o(\text{nom})$ Internal to converter
Input capacitance - internal filter	C_{input}		22		μF	
Input capacitance - external filter	C_{bypass}		1		μF	Recommended customer added capacitance

12 V Model
5 V SetpointElectrical Characteristics
- O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Nominal set-point voltage	$V_o(\text{nom})$	4.95	5.00	5.05	Vdc	$V_{in} = V_{in}(\text{nom}); I_{out} = I_{out}(\text{nom})$
Line regulation				± 0.2	%	$I_{out} = I_{out}(\text{nom}); V_{in}(\text{min})$ to $V_{in}(\text{max})$
Load regulation				± 0.5	%	$V_{in} = V_{in}(\text{nom}); I_{out}(\text{min})$ to $I_{out}(\text{max})$
Output current - continuous	I_{out}	0		6.0	Adc	
Output current - short circuit	I_{sc}		13.5		Apk	Continuous, unit auto recovers from short
Output voltage - noise V_{rms}	V_{p-p}			50	mV pk-pk	Measurement band width 20 MHz See Application Note 186 for details

12 V Model
5 V SetpointElectrical Characteristics
- O/P

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Load transient response - peak deviation	$V_{dynamic}$		100		mV	Peak deviation for 50% to 100% step load, $di/dt = 10 \text{ A/s}$
Load transient response - recover	$T_{recovery}$		8		μs	Settling time to within 1% of output set point voltage for 50% to 75% step load
External load capacitance	C_{ext}		0	1000	μF	See Application Notes 186 for output capacitance values vs. stability

12 V Model
5 V Setpoint

Protection and Control
Features

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Overcurrent limit inception	I_{oc}		10		Adc	$V_o = 90\%$ of V_o (nom)

12 V Model
5 V Setpoint

Efficiency

Characteristic	Symbol	Min	Typ	Max	Units	Notes and Conditions
Efficiency	η	91	93		%	$I_{out} = 100\%$ I_{out} (max), $V_{in} = V_{in}$ (nom)
Efficiency	η	89	91		%	$I_{out} = 50\%$ I_{out} (max), $V_{in} = V_{in}$ (nom)

3.3 V, 5 V and 12 V Model
0.9 V Setpoint

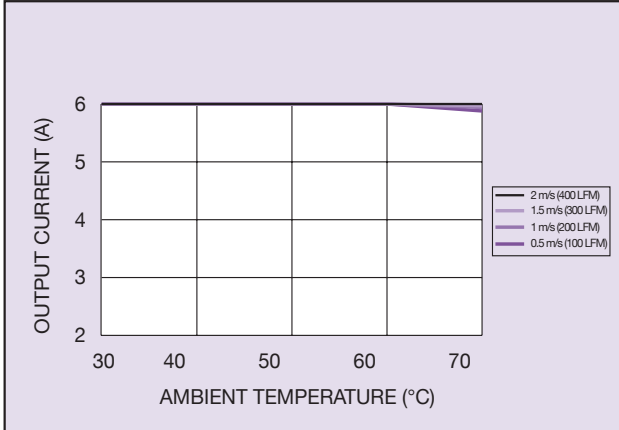


Figure 1: Thermal Derating Curve 3.3 Vin

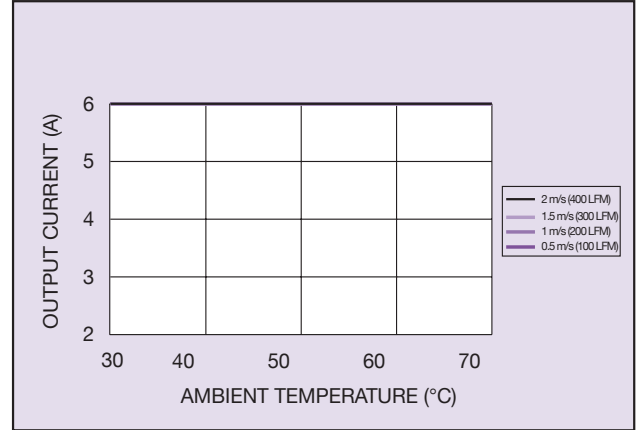


Figure 2: Thermal Derating Curve 5 Vin

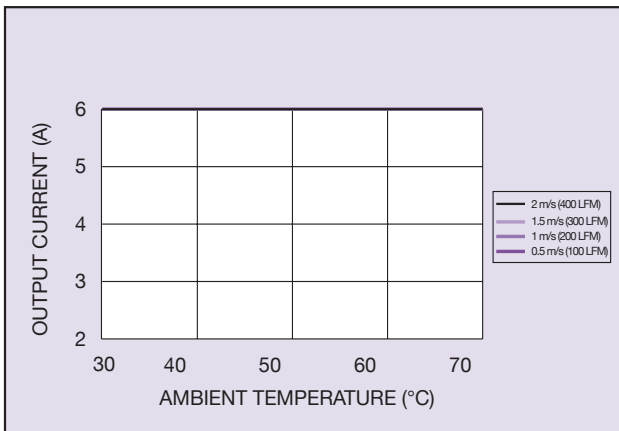


Figure 3: Thermal Derating Curve 12 Vin

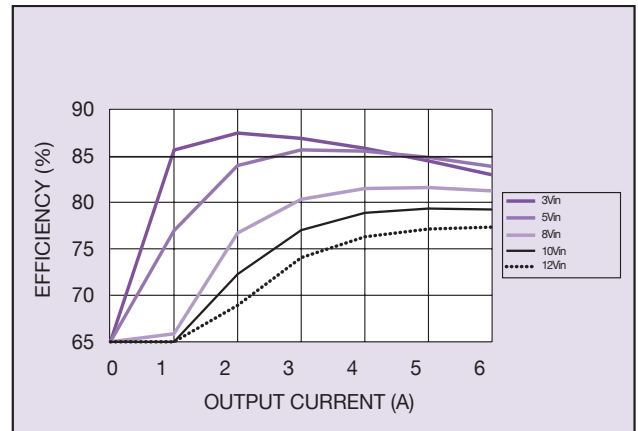


Figure 4: Efficiency vs. Load

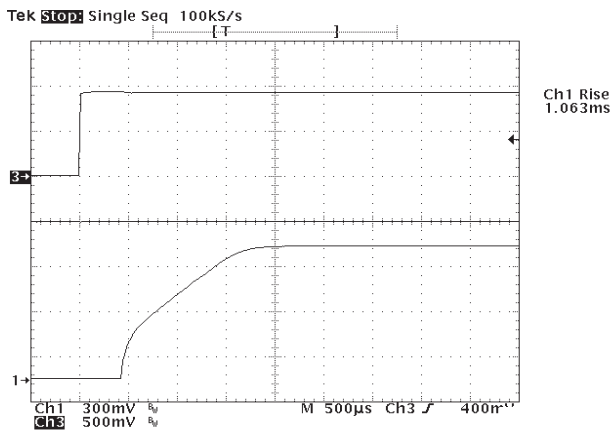


Figure 5: Remote On/Off
(Channel 1: Output Voltage, Channel 3: Enable)

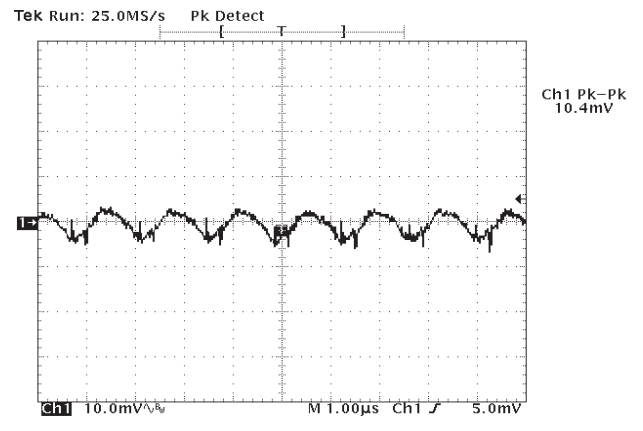


Figure 6: Typical Output Ripple

3.3 V, 5 V and 12 V Model
0.9 V Setpoint

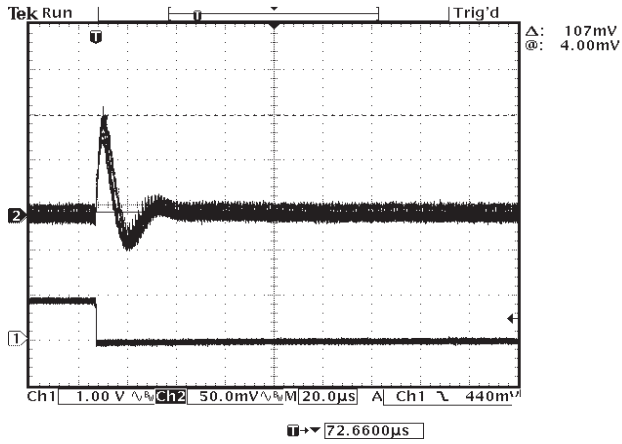


Figure 7: Transient Response 100% - 50%
(Channel 1: Current Step at 3 A/div,
Channel 2: Output Voltage Deviation)

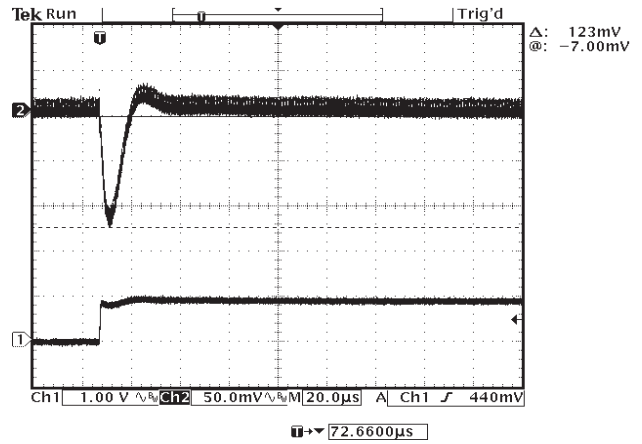


Figure 8: Transient Response 50% - 100%
(Channel 1: Current Step at 3 A/div,
Channel 2: Output Voltage Deviation)

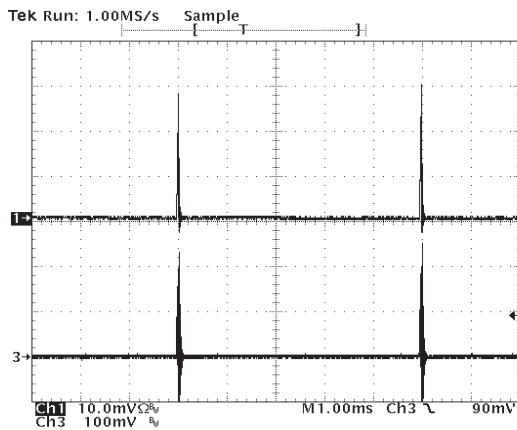


Figure 9: Short Circuit Characteristic
(Channel 1: Output Current at 10 A/div,
Channel 3: Output Voltage)

3.3 V, 5 V and 12 V Model
2.5 V Setpoint

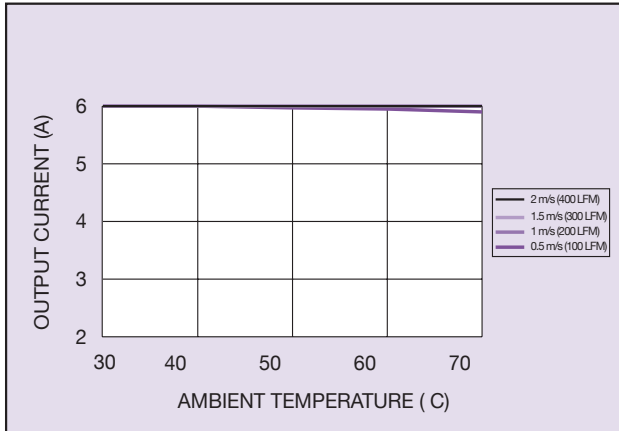


Figure 10: Thermal Derating Curve 3.3 Vin

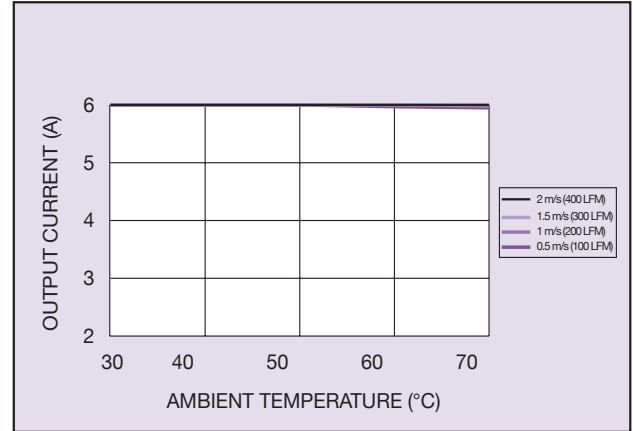


Figure 11: Thermal Derating Curve 5 Vin

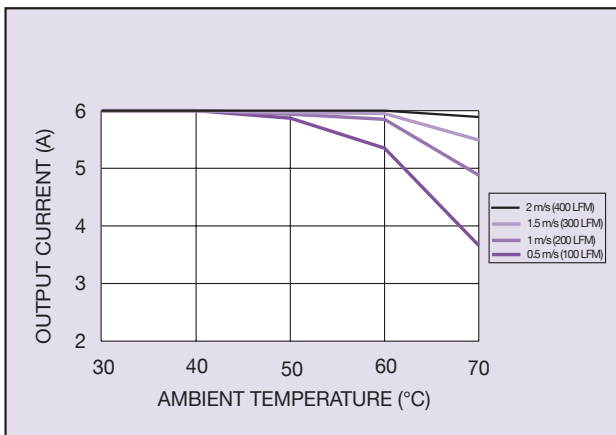


Figure 12: Thermal Derating Curve 12 Vin

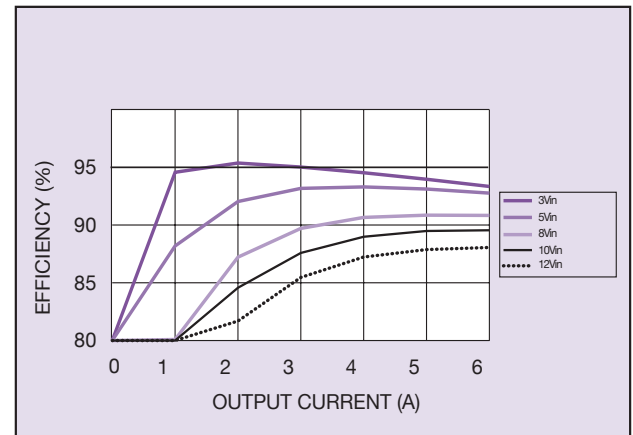


Figure 13: Efficiency vs. Load

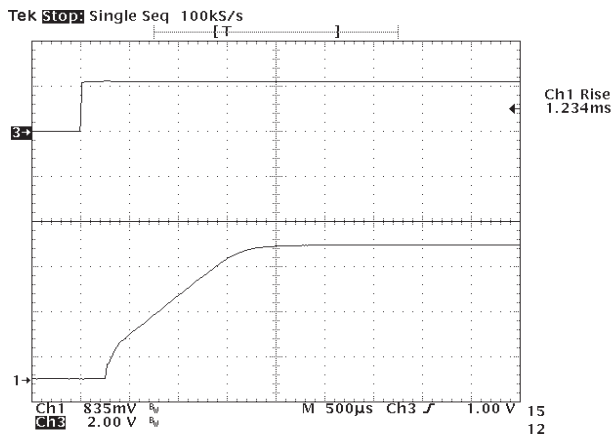


Figure 14: Remote On/Off
(Channel 1: Output Voltage, Channel 3: Enable)

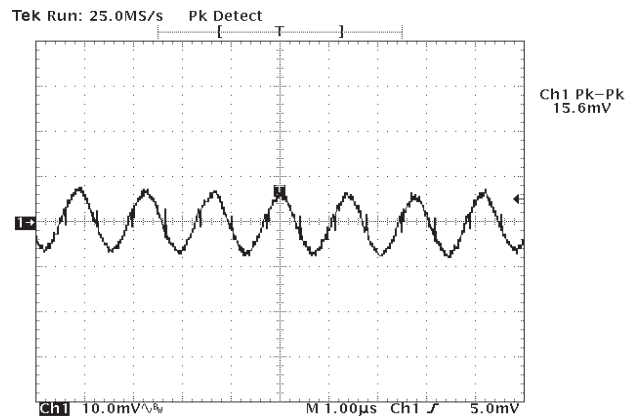


Figure 15: Typical Output Ripple

3.3 V, 5 V and 12 V Model
2.5 V Setpoint

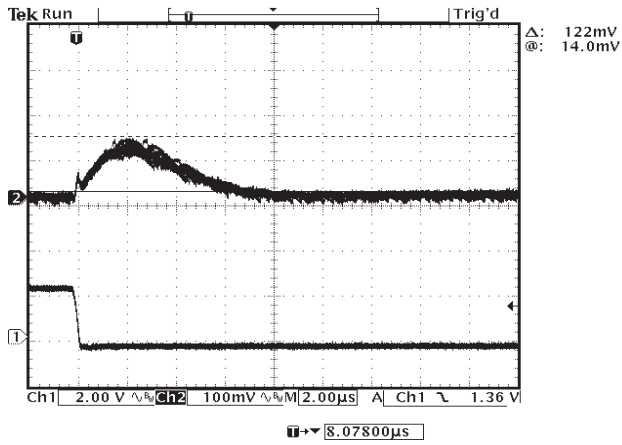


Figure 16: Transient Response 100% - 50%
(Channel 1: Current Step at 3 A/div,
Channel 2: Output Voltage Deviation)

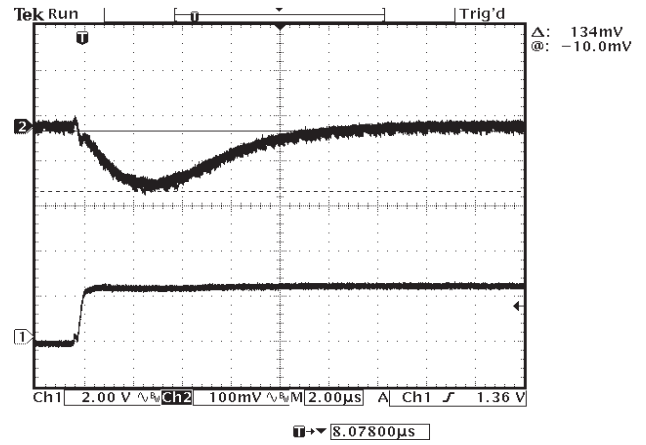


Figure 17: Transient Response 50% - 100%
(Channel 1: Current Step at 3 A/div,
Channel 2: Output Voltage Deviation)

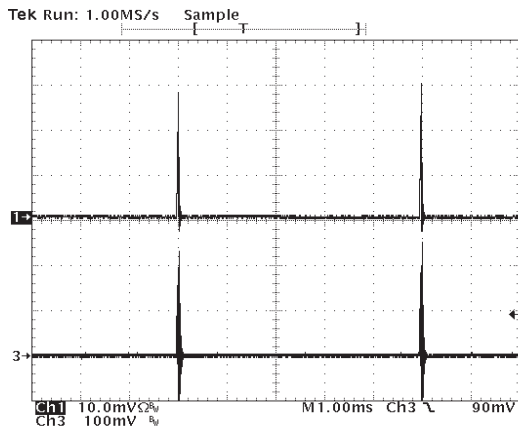


Figure 18: Short Circuit Characteristic
(Channel 1: Output Current at 10 A/div,
Channel 3: Output Voltage)

12 V Model
5 V Setpoint

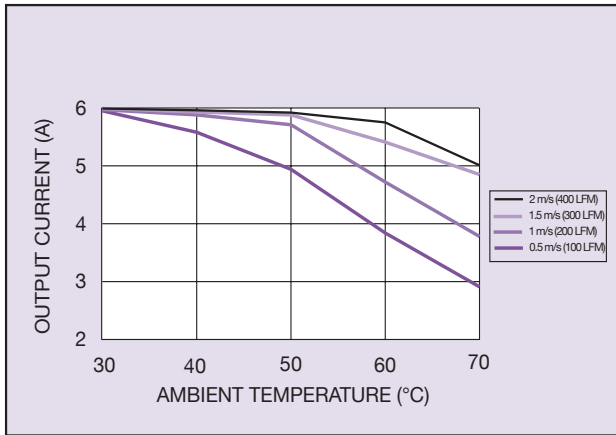


Figure 19: Thermal Derating Curve 12 Vin

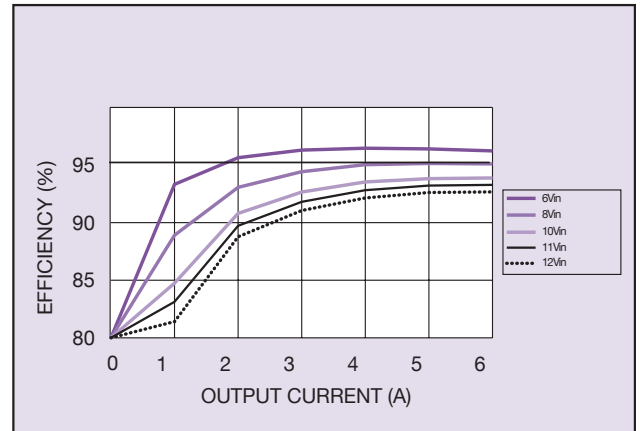


Figure 20: Efficiency vs. Load

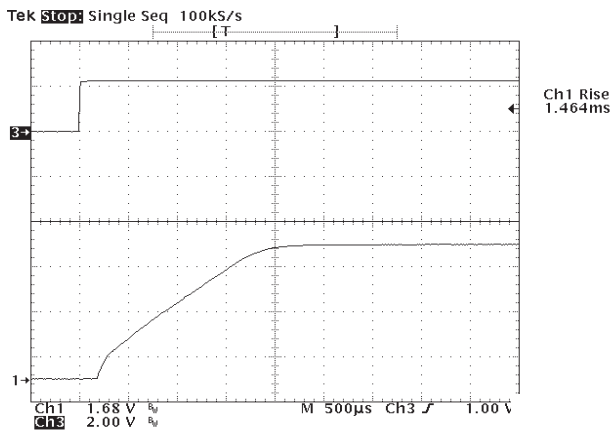


Figure 21: Remote On/Off
(Channel 1: Output Voltage, Channel 3: Enable)

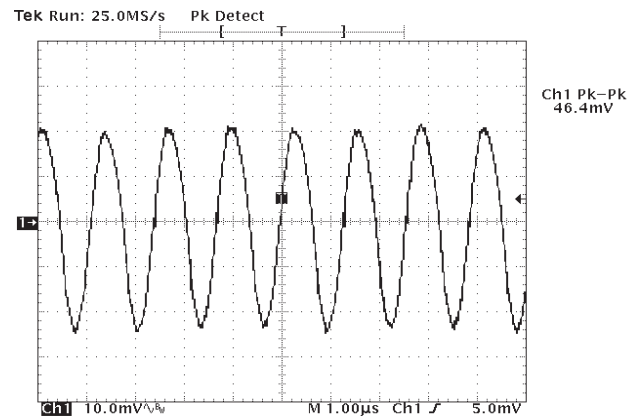


Figure 22: Typical Output Ripple

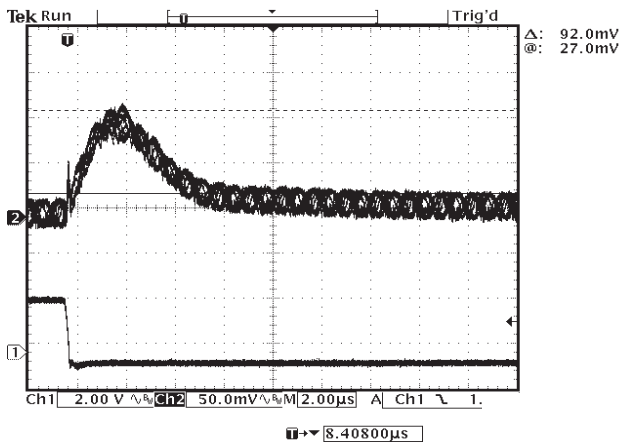


Figure 23: Transient Response 100% - 50%
(Channel 1: Current Step at 2 A/div,
Channel 2: Output Voltage Deviation)

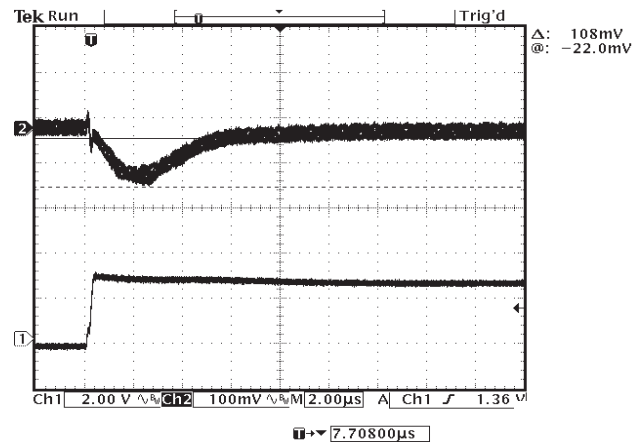


Figure 24: Transient Response 50% - 100%
(Channel 1: Current Step at 2 A/div,
Channel 2: Output Voltage Deviation)

12 V Model
5 V Setpoint

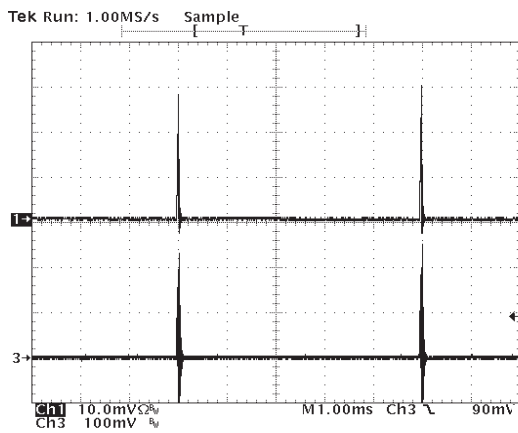


Figure 25: Short Circuit Characteristic
(Channel 1: Output Current at 10 A/div
Channel 3: Output Voltage)

Pin Connections

Pin No.	Function
1	Remote on/off
2	Vin
3	Common / RTN
4	Vout
5	PG / Trim
6	Mech Pin (Horz/SMT only)

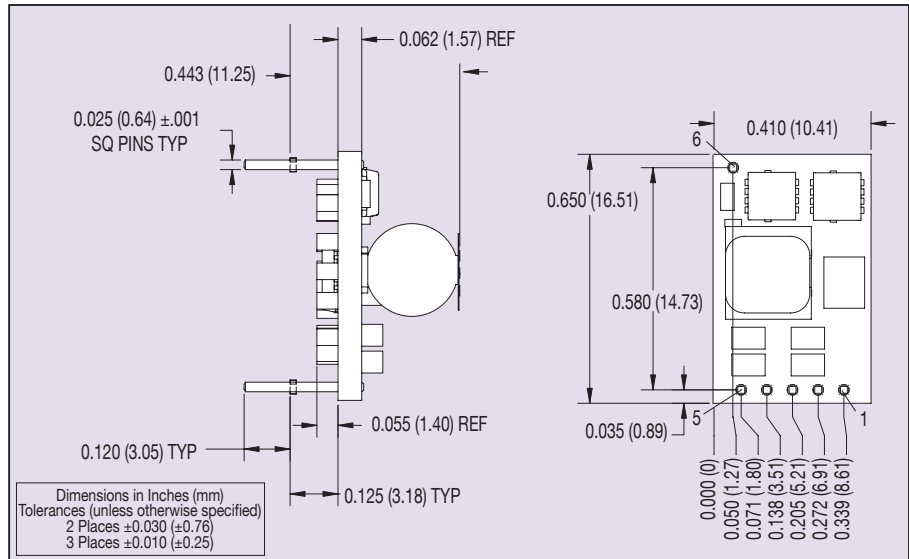


Figure 26: Mechanical Drawing - Horizontal

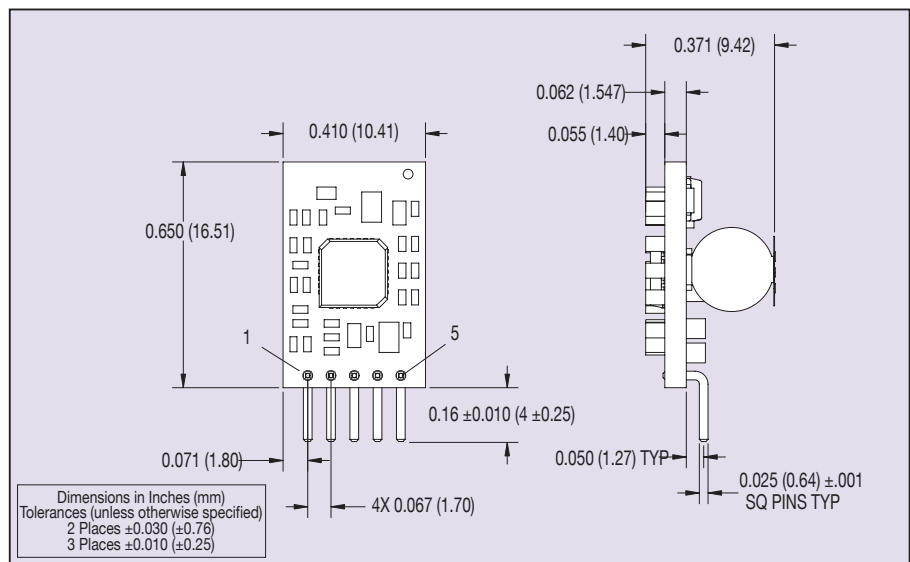


Figure 27: Mechanical Drawing - Vertical

Pin Connections

Pin No.	Function
1	Remote on/off
2	Vin
3	Common / RTN
4	Vout
5	PG / Trim
6	Mech Pin (Horz/SMT only)

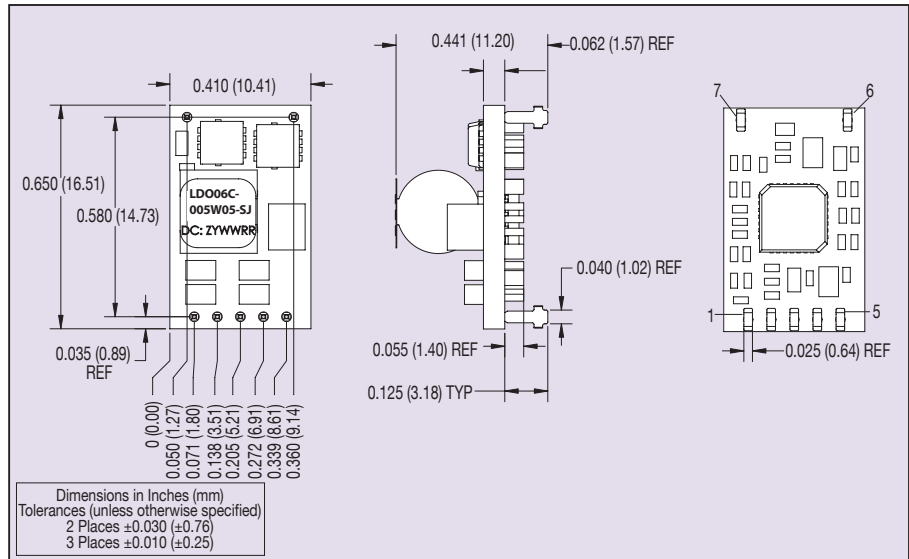


Figure 28: Mechanical Drawing - Surface Mount

Note 1

Thermal reference point is defined as the highest temperature measured at any one of the specified thermal reference points. See Application Note 186.

Note 2

The control pin is referenced to Ground.

Note 3

The LDO06C is supplied as standard with positive logic.
Control Input pulled low: Unit Disabled
Control Input left open: Unit Enabled

NORTH AMERICAemail: sales.us@artesyntech.com

☎ 800 769 7274

☎ +508 628 5600

EUROPEAN LOCATIONSemail: sales.europe@artesyntech.com**IRELAND**

☎ +353 24 93130

AUSTRIA

☎ +43 1 80150

FAR EAST LOCATIONSemail: sales.asia@artesyntech.com**HONG KONG**

☎ +852 2699 2868

Longform Datasheet © Artesyn Technologies® 2006

The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.