SERIAL DIGITAL AUDIO PASSIVE SIGNAL SPLITTER

AS400M


The AS400M Serial Digital Audio Passive Signal Splitter answers a demand from systems engineers for an economical way of dividing a single serial digital audio signal between two destinations. The modules are designed for in line use and, having no powered components, are as simple to use as a T-piece. A modest signal loss is incurred from the use of these modules, but they can be used freely on all medium and short cable runs.

Input & Output Signal Format	AES/EBU digital audio
Number of Inputs	1
Number of Outputs	2
Insertion Loss at 1 MHz	< 3.2 dB
Impedance	110 ohms*
Temperature Range	0°C to 70°C
Aqueous Washable	No
Package	DR00221B

*Note that for best impedance matching the impedance of the input and both outputs must be equal. If, for any reason, only one of the outputs is used the unused output must be properly terminated.

© Faraday Technology. As part of continual product improvement the specifications, details and dimensions shown in this publication are subject to change without notice

PACKAGE DETAIL

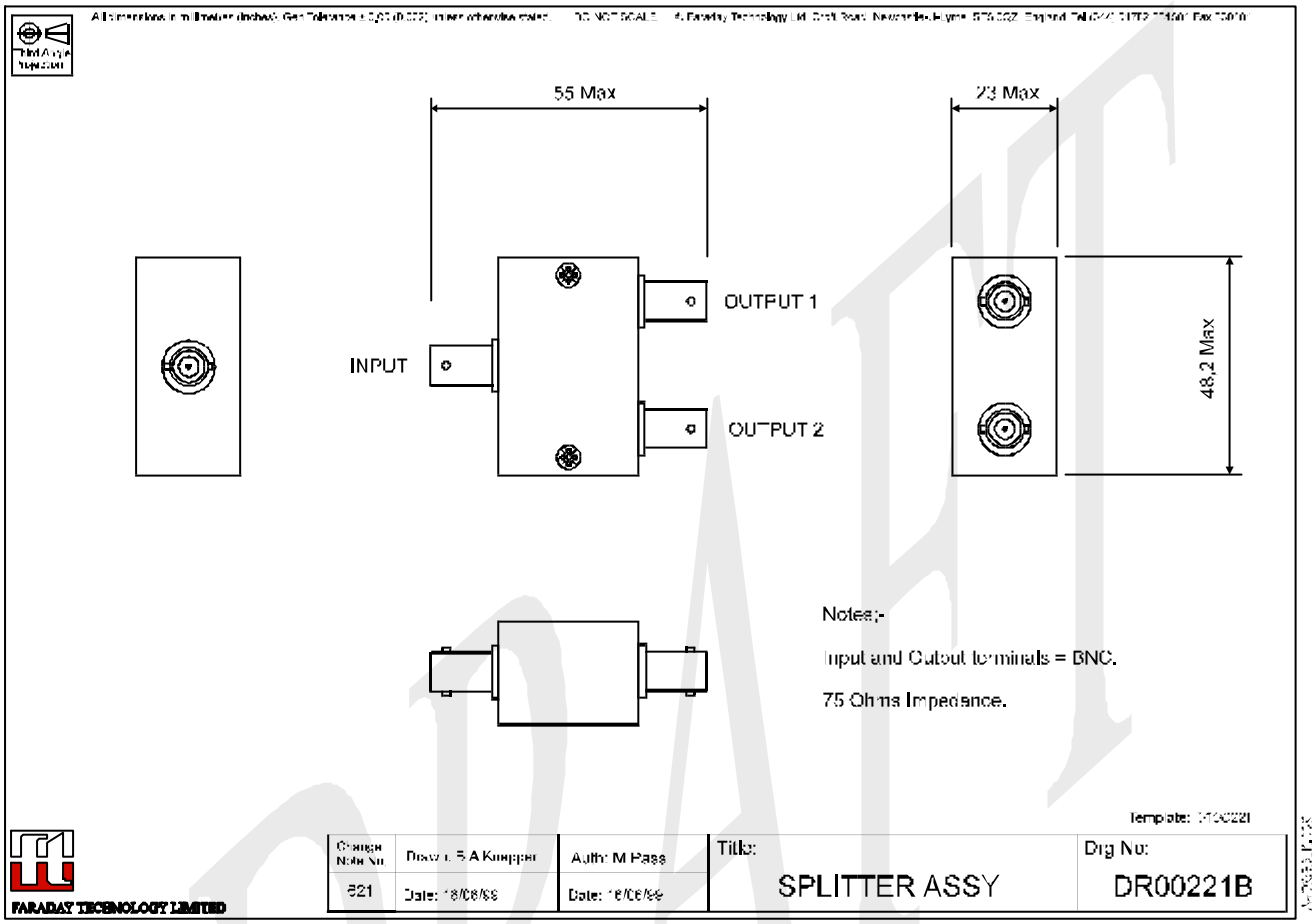

DRAFT

Faraday Technology Ltd.
Croft Road Industrial Estate,
Newcastle, Staffordshire
ST5 0QZ. England.
Tel: + 44 (0)1782 661501
Fax: + 44 (0)1782 630101
Email: sales@faradaytech.co.uk
Web site: http://www.faradaytech.co.uk