


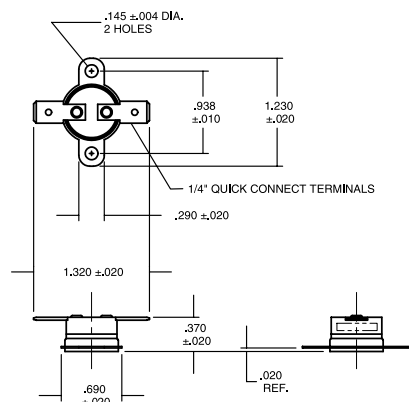

22 New Bimetal Disc Thermostats for Appliance and HVAC

- Loose ring, stainless steel mounting brackets.
- 1/4" quick connect terminations.
- Automatic reset.
- Aluminum disc cup.

Single pole, single throw
Available in either open or close on temperature rise
Electrical Ratings

Resistive	15A @ 120VAC, 10A @ 240VAC
Inductive	3.0FLA, 12.0LRA @ 120VAC; 1.5FLA, 6.0LRA @ 240 VAC
Pilot Duty	125VA
Dimensions	Length (1.23"), case width (1.32"), height (.37")
Weight	0.2 oz.
Agency	UL Recognized File #E19279 CSA Certified File #LR19988 VDE Lic. 81669

FURNACE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

White-Rodgers:

[3L11-210](#) [3L11-120](#) [3L11-160](#) [3L11-230](#) [3L11-170](#) [3L11-140](#) [3L11-190](#) [3L11-325](#) [3F11-100](#) [3F11-170](#) [3F11-140](#)
[3F11-120](#) [3L11-60](#) [3L11-150](#) [3L11-85](#) [3L11-250](#) [3F11-180](#) [3L11-110](#) [3L11-175](#) [3L11-180](#) [3L11-220](#) [3F11-240](#)
[3F11-225](#)