


3-Electrode Gas Discharge Tubes

10KA

Radial Lead wire



1: Dimension(mm)

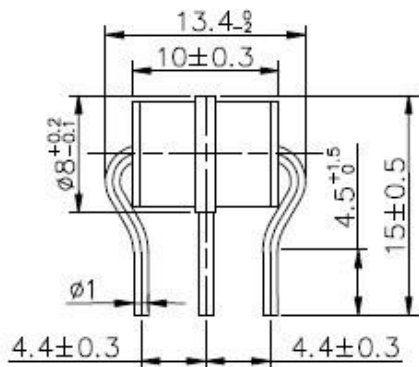

2:Main Applications

- PCI Cards protection
- Telephone/Fax/Modem protection
- single line protection
- ADSL/XDSL Splitter,Power Supply
- Surge Protection Device/Surge Protector

3:Features

- 100% Lead-Free(RoHS Compliant)
- Non-Radioactive
- Low capacitance: ≤1pF
- Small size :Φ8x10(mm)
- Safety certification: File number: E505240

4 Electrical Characteristics

	DC Spark-over Voltage	Impulse Spark-over Voltage	Impulse Spark-over Voltage	Insulation Resistanc e	Impulse disch arge current 8/20μs	Impulse Life 300 hits	AC dischar ge current 50Hz,1s	Delivery time	UL Certificat e
Part Number	@100V/S	@100V/μs	@1KV/μs	GΩ	10 Times	10x1000μs	10times	days	UL497B
3R-75	75V ±20%	≤500V	≤ 600V	>1GΩ	10KA	200A	10A	15days	E505240
3R-90	90V ±20%	≤500V	≤ 600V	>1GΩ	10KA	200A	10A	15days	E505240
3R-140	140V±20%	≤500V	≤ 600V	>1GΩ	10KA	200A	10A	15days	E505240
3R-150	150V±20%	≤500V	≤ 600V	>1GΩ	10KA	200A	10A	15days	E505240
3R-200	200V±20%	≤600V	≤ 700V	>1GΩ	10KA	200A	10A	15days	E505240
3R-230	230V±20%	≤600V	≤ 700V	>1GΩ	10KA	200A	10A	15days	E505240
3R-250	250V±20%	≤600V	≤ 700V	>1GΩ	10KA	200A	10A	15days	E505240
3R-300	300V±20%	≤800V	≤ 900V	>1GΩ	10KA	200A	10A	15days	E505240
3R-350	350V±20%	≤900V	≤ 1000V	>1GΩ	10KA	200A	10A	15days	E505240
3R-400	400V±20%	≤900V	≤ 1000V	>1GΩ	10KA	200A	10A	15days	E505240
3R-420	420V±20%	≤900V	≤ 1000V	>1GΩ	10KA	200A	10A	15days	E505240
3R-470	470V±20%	≤1100V	≤ 1200V	>1GΩ	10KA	200A	10A	15days	E505240
3R-500	500V±20%	≤1100V	≤ 1200V	>1GΩ	10KA	200A	10A	15days	E505240
3R-550	550V±20%	≤1300V	≤ 1400V	>1GΩ	10KA	200A	10A	15days	E505240
3R-600	600V±20%	≤1300V	≤1400V	>1GΩ	10KA	200A	10A	15days	E505240
3R-800	800V±20%	≤1500V	≤1600V	>1GΩ	10KA	200A	10A	15days	---

3-Electrode Gas Discharge Tubes

10KA



1:At delivery AQL 0.65 leave II Military Standard 105 E

2:In ionized mode

3:Test according to ITU-T Rec.k.12

Environmental resistance



Storage temperature:	-40℃---+90℃
Operating temperature:	-40℃---+90℃
Electrode:	Tin Plated

Example Part Number: HA3R8-90M

HA	=	HUAAN
3	=	3 Electrode device
R	=	Gas Discharge Tube
8	=	8mm Diameter
90	=	90V
M	=	Medium Surge 10KA

Reflow Soldering Curve

Packaging Information

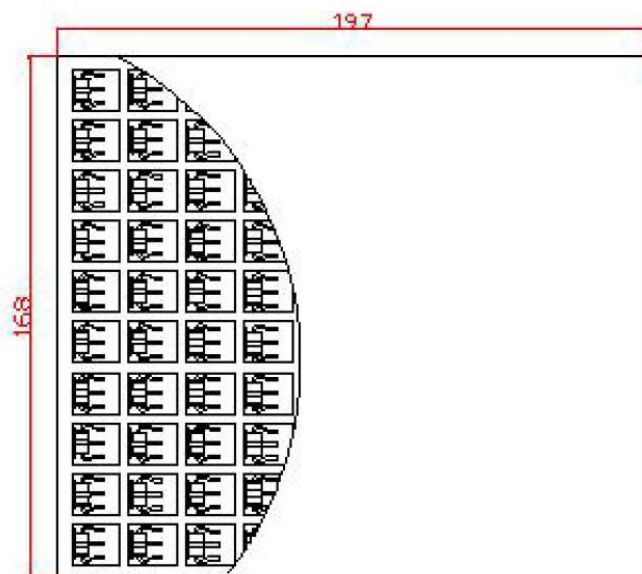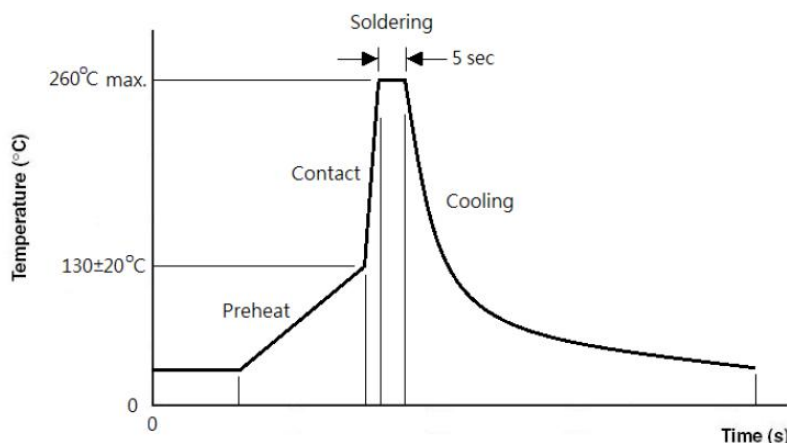

Packaging Quantity

Part Number	Quantity	
	Per Tray	Per Carton
3R-xxx Series	100PCS	5000PCS