Data sheet acquired from Cypress Semiconductor Corporation.
Data sheet modified to remove devices not offered.

TEXAS INSTRUMENTS

CY54/74FCT540T
CY54/74FCT541T

8-Bit Buffers/Line Drivers

SCCS029 - May 1994 - Revised March 2000

Features


- **Function, pinout, and drive compatible with FCT and F logic**
- **FCT-C speed at 4.1 ns max. (Com'l)**
  FCT-A speed at 4.8 ns max. (Com'l)
- **Reduced V_{OH} (typically = 3.3V) versions of equivalent FCT functions**
- **Edge-rate control circuitry for significantly improved noise characteristics**
- **Power-off disable feature**
- **ESD > 2000V**
- **Matched rise and fall times**
- **Fully compatible with TTL input and output logic levels**
- **Sink current 64 mA (Com'l), 48 mA (Mil)**
  Source current 32 mA (Com'l), 12 mA (Mil)
- **Extended commercial range of –40˚C to +85˚C**

Functional Description

The FCT540T inverting buffer/line driver and the FCT541T non-inverting buffer/line driver are designed to be employed as memory address drivers, clock drivers, and bus-oriented transmitters/receivers. The devices provide speed and drive capabilities equivalent to their fastest bipolar logic counterparts while reducing power dissipation. The input and output voltage levels allow direct interface with TTL, NMOS, and CMOS devices without external components.


The outputs are designed with a power-off disable feature to allow for live insertion of boards.

Logic Block Diagram—FCT540T

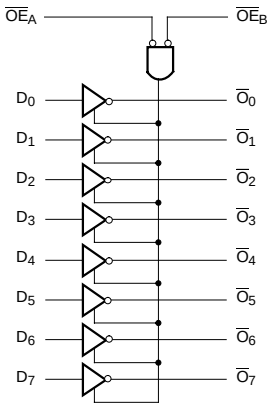


Pin Configurations


CERDIP/SOIC/QSOP
Top View



Logic Block Diagram—FCT541T

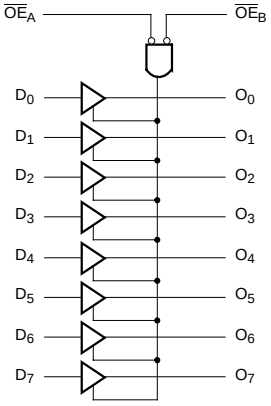

CERDIP/DIP/SOIC/QSOP
Top View



Copyright © 2000, Texas Instruments Incorporated

Function Table FCT540T[1]

Inputs			Output
$\overline{OE}_A$	$\overline{OE}_B$	D	
L	L	L	H
L	L	H	L
H	H	X	Z

Function Table FCT541T[1]

Inputs			Output
$\overline{OE}_A$	$\overline{OE}_B$	D	
L	L	L	L
L	L	H	H
H	H	X	Z

Maximum Ratings[2, 3]

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature ..... –65°C to +150°C

Ambient Temperature with Power Applied..... –65°C to +135°C

Supply Voltage to Ground Potential..... –0.5V to +7.0V

DC Input Voltage ..... –0.5V to +7.0V

DC Output Voltage..... –0.5V to +7.0V

DC Output Current (Maximum Sink Current/Pin) ..... 120 mA

Power Dissipation 0.5W

Static Discharge Voltage..... >2001V (per MIL-STD-883, Method 3015)

Operating Range

Range	Range	Ambient Temperature	V_{CC}
Commercial	T, AT, CT	–40°C to +85°C	5V ± 5%
Military[4]	All	–55°C to +125°C	5V ± 10%

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions		Min.	Typ.[5]	Max.	Unit
V_{OH}	Output HIGH Voltage	V_{CC} = Min., I_{OH} = –32 mA	Com'l	2.0			V
		V_{CC} = Min., I_{OH} = –15 mA	Com'l	2.4	3.3		V
		V_{CC} = Min., I_{OH} = –12 mA	Mil	2.4	3.3		V
V_{OL}	Output LOW Voltage	V_{CC} = Min., I_{OL} = 64 mA	Com'l		0.3	0.55	V
		V_{CC} = Min., I_{OL} = 48 mA	Mil		0.3	0.55	V
V_{IH}	Input HIGH Voltage			2.0			V
V_{IL}	Input LOW Voltage					0.8	V
V_H	Hysteresis[6]	All inputs			0.2		V
V_{IK}	Input Clamp Diode Voltage	V_{CC} = Min., I_{IN} = –18 mA			–0.7	–1.2	V
I_I	Input HIGH Current	V_{CC} = Max., V_{IN} = V_{CC}				5	µA
I_{IH}	Input HIGH Current	V_{CC} = Max., V_{IN} = 2.7V				±1	µA
I_{IL}	Input LOW Current	V_{CC} = Max., V_{IN} = 0.5V				±1	µA
I_{OZH}	Off State HIGH-Level Output Current	V_{CC} = Max., V_{OUT} = 2.7V				10	µA
I_{OZL}	Off State LOW-Level Output Current	V_{CC} = Max., V_{OUT} = 0.5V				–10	µA
I_{OS}	Output Short Circuit Current[7]	V_{CC} = Max,. V_{OUT} = 0.0V		–60	–120	–225	mA
I_{OFF}	Power-Off Disable	V_{CC} = 0V, V_{OUT} = 4.5V				±1	µA

Notes:

1. H = HIGH Voltage Level
   L = LOW Voltage Level
   X = Don't Care
   Z = High Impedance
2. Unless otherwise noted, these limits are over the operating free-air temperature range.
3. Unused inputs must always be connected to an appropriate logic voltage level, preferably either V_{CC} or ground.
4. T_A is the "instant on" case temperature.
5. Typical values are at V_{CC}=5.0V, T_A=+25˚C ambient.
6. This parameter is specified but not tested.
7. Not more than one output should be shorted at a time. Duration of short should not exceed one second. The use of high-speed test apparatus and/or sample and hold techniques are preferable in order to minimize internal chip heating and more accurately reflect operational values. Otherwise prolonged shorting of a high output may raise the chip temperature well above normal and thereby cause invalid readings in other parametric tests. In any sequence of parametric tests, I_{OS} tests should be performed last.

Capacitance[6]

Parameter	Description	Test Conditions	Typ. [5]	Max.	Unit
C_{IN}	Input Capacitance		5	10	pF
C_{OUT}	Output Capacitance		9	12	pF

Power Supply Characteristics

Parameter	Description	Test Conditions	Typ.[5]	Max.	Unit
I_{CC}	Quiescent Power Supply Current	V_{CC}=Max., $V_{IN} \le 0.2V$, $V_{IN} \ge V_{CC}-0.2V$	0.1	0.2	mA
ΔI_{CC}	Quiescent Power Supply Current (TTL inputs)	V_{CC} = Max., V_{IN} = 3.4V, f_1 = 0, Outputs Open[8]	0.5	2.0	mA
I_{CCD}	Dynamic Power Supply Current[9]	V_{CC} = Max., 50% Duty Cycle, Outputs Open, One Bit Toggling at f_1 = 10 MHz, $\overline{OE}_A$=$\overline{OE}_B$=GND, or $\overline{OE}_A$=GND, OE_B=V_{CC}, $V_{IN} \le 0.2V$ or $V_{IN} \ge V_{CC}-0.2V$	0.06	0.12	mA/MHz
I_C	Total Power Supply Current[10]	V_{CC}=Max., 50% Duty Cycle, Outputs Open, One Bit Toggling at f_1=10 MHz, $\overline{OE}_A$=$\overline{OE}_B$=GND, or $\overline{OE}_A$=GND, OE_B=V_{CC}, $V_{IN} \le 0.2V$ or $V_{IN} \ge V_{CC}-0.2V$	0.7	1.4	mA
		V_{CC} = Max., 50% Duty Cycle, Outputs Open, One Bit Toggling at f_1=10 MHz, $\overline{OE}_A$=$\overline{OE}_B$=GND, or $\overline{OE}_A$=GND, OE_B=V_{CC}, V_{IN} = 3.4V or V_{IN} = GND	1.0	2.4	mA
		V_{CC} = Max., 50% Duty Cycle, Outputs Open, Eight Bits Toggling at f_1= 2.5 MHz, $\overline{OE}_A$=$\overline{OE}_B$=GND, or $\overline{OE}_A$=GND, OE_B=V_{CC}, $V_{IN} \le 0.2V$ or $V_{IN} \ge V_{CC}-0.2V$	1.3	2.6[11]	mA
		V_{CC} = Max., 50% Duty Cycle, Outputs Open, Eight Bits Toggling at f_1=2.5 MHz, $\overline{OE}_A$=$\overline{OE}_B$=GND, or $\overline{OE}_A$=GND, OE_B=V_{CC}, V_{IN} = 3.4V or V_{IN} = GND	3.3	10.6[11]	mA

Notes:

8. Per TTL driven input (V_{IN}=3.4V); all other inputs at V_{CC} or GND.
9. This parameter is not directly testable, but is derived for use in Total Power Supply calculations.
10. $I_C = I_{QUIESCENT} + I_{INPUTS} + I_{DYNAMIC}$
    $I_C = I_{CC}+\Delta I_{CC}D_HN_T+I_{CCD}(f_0/2 + f_1N_1)$
    I_{CC} = Quiescent Current with CMOS input levels
    ΔI_{CC} = Power Supply Current for a TTL HIGH input (V_{IN}=3.4V)
    D_H = Duty Cycle for TTL inputs HIGH
    N_T = Number of TTL inputs at D_H
    I_{CCD} = Dynamic Current caused by an input transition pair (HLH or LHL)
    f_0 = Clock frequency for registered devices, otherwise zero
    f_1 = Input signal frequency
    N_1 = Number of inputs changing at f_1
    All currents are in milliamps and all frequencies are in megahertz.
11. Values for these conditions are examples of the I_{CC} formula. These limits are specified but not tested.

Switching Characteristics Over the Operating Range[12]

Parameter	Description	FCT540T/FCT541T Commercial		FCT540AT/FCT541AT Commercial		Unit	Fig. No.[13]
		Min.	Max.	Min.	Max.		
t_{PLH} t_{PHL}	Propagation Delay Data to Output (FCT540)	1.5	8.5	1.5	4.8	ns	1, 2
t_{PLH} t_{PHL}	Propagation Delay Data to Output (FCT541)	1.5	8.0	1.5	4.8	ns	1, 3
t_{PZH} t_{PZL}	Output Enable Time	1.5	10.0	1.5	6.2	ns	1, 7, 8
t_{PHZ} t_{PLZ}	Output Disable Time	1.5	9.5	1.5	5.6	ns	1, 7, 8

Parameter	Description	FCT540CT/FCT541CT Military		FCT540CT/FCT541CT Commercial		FCT540DT/FCT541DT Commercial		Unit	Fig. No.[13]
		Min.	Max.	Min.	Max.	Min.	Max.		
t_{PLH} t_{PHL}	Propagation Delay Data to Output (FCT540)	1.5	4.7	1.5	4.1	1.5	3.8	ns	1, 2
t_{PLH} t_{PHL}	Propagation Delay Data to Output (FCT541)	1.5	4.6	1.5	4.1	1.5	3.8	ns	1, 3
t_{PZH} t_{PZL}	Output Enable Time	1.5	6.5	1.5	5.8	1.5	5.2	ns	1, 7, 8
t_{PHZ} t_{PLZ}	Output Disable Time	1.5	5.7	1.5	5.2	1.5	5.0	ns	1, 7, 8

Shaded areas contain preliminary information.

Notes:

12. Minimum limits are specified but not tested on Propagation Delays.
13. See “Parameter Measurement Information” in the General Information section.

Ordering Information—FCT540T

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
4.1	CY74FCT540CTQCT	Q5	20-Lead (150-Mil) QSOP	Commercial
4.7	CY54FCT540CTDMB	D6	20-Lead (300-Mil) CerDIP	Military


Ordering Information—FCT541T

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
4.1	CY74FCT541CTQCT	Q5	20-Lead (150-Mil) QSOP	Commercial
	CY74FCT541CTSOC/SOCT	S5	20-Lead (300-Mil) Molded SOIC	
4.6	CY54FCT541CTDMB	D6	20-Lead (300-Mil) CerDIP	Military
4.8	CY74FCT541ATPC	P5	20-Lead (300-Mil) Molded DIP	Commercial
	CY74FCT541ATQCT	Q5	20-Lead (150-Mil) QSOP	
	CY74FCT541ATSOC/SOCT	S5	20-Lead (300-Mil) Molded SOIC	
8.0	CY74FCT541TSOC/SOCT	S5	20-Lead (300-Mil) Molded SOIC	Commercial

Document #: 38-00260-B


Package Diagrams

20-Lead (300-Mil) CerDIP D6
MIL-STD-1835 D-8 Config.A

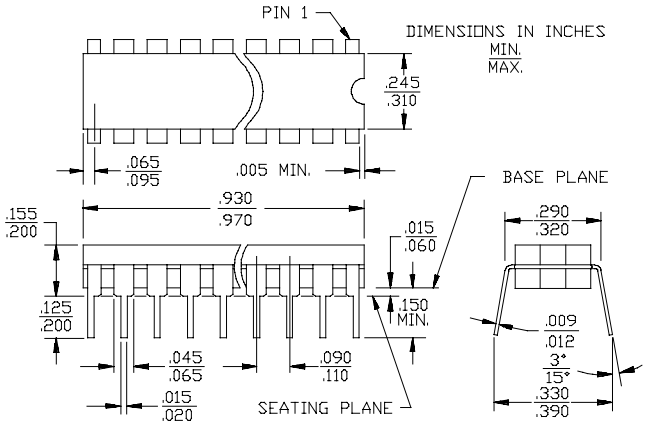


Package Diagrams (continued)

20-Lead (300-Mil) Molded DIP P5

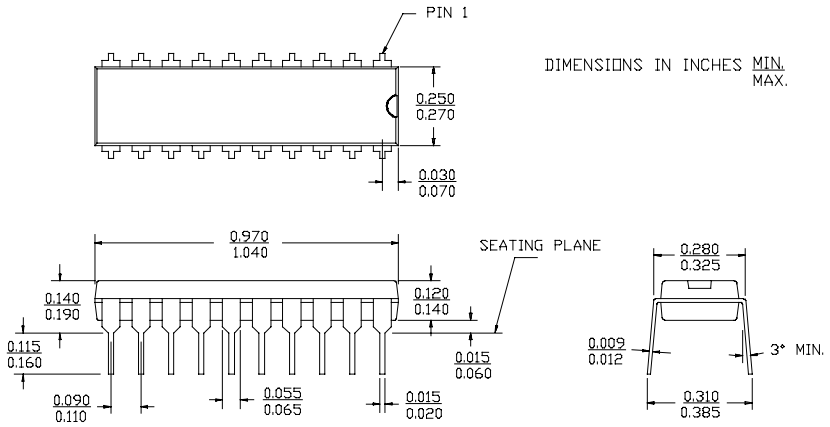


20-Lead Quarter Size Outline Q5

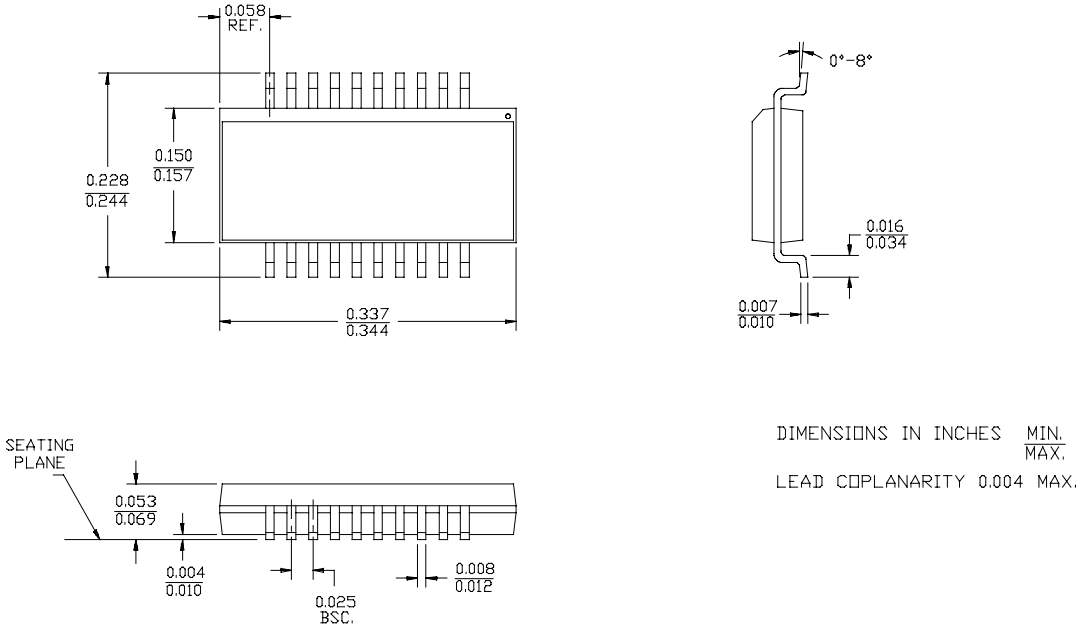

Package Diagrams (continued)

20-Lead (300-Mil) Molded SOIC S5

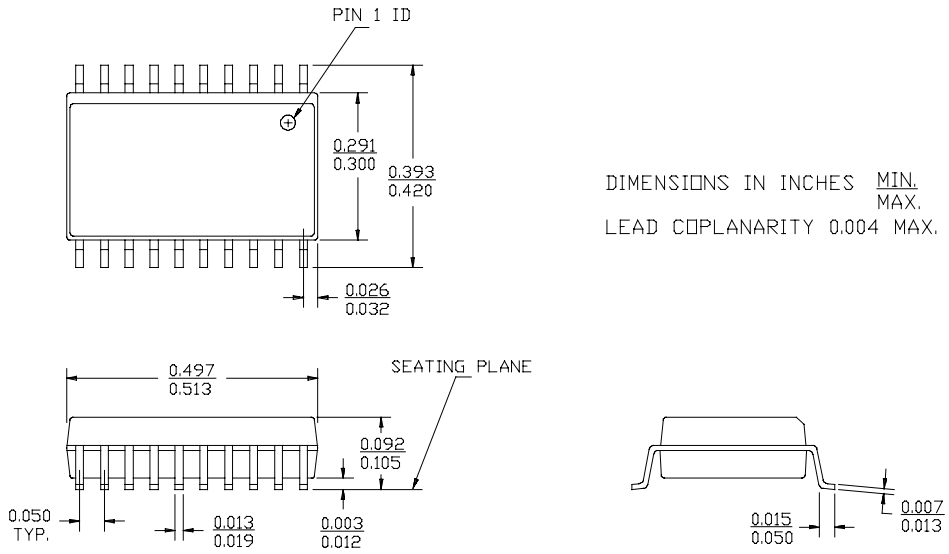

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 2000, Texas Instruments Incorporated