HUAAN 华兴安电子 HUAAN LIMITED


Φ8*10mm

3-Electrode Gas Discharge Tubes

10KA

Radial Lead wire

1：Dimension(mm)

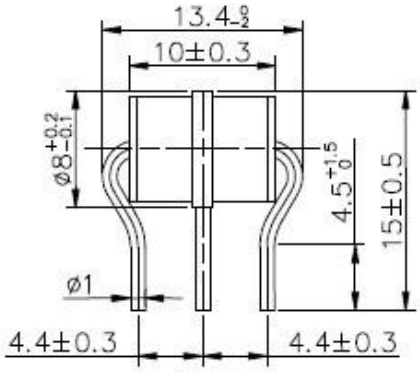



2:Main Applications

- •PCI Cards protection
- •Telephone/Fax/Modem protection
- •single line protection
- •ADSL/XDSL Splitter,Power Supply
- •Surge Protection Device/Surge Protector

3:Features

- •100% Lead-Free(RoHs Compliant)
- •Non-Radioactive
- •Low capacitance: ≤1pF
- •Small size :Φ8x10(mm)
- •Safety certification: File number: E505240

4 Electrical Characteristics

Part Number	DC Spark-over Voltage @100V/S	Impulse Spark-over Voltage @100V/μs	Impulse Spark-over Voltage @1KV/μs	Insulation Resistance GΩ	Impulse discharge current 8/20μs 10 Times	Impulse Life 300 hits 10x1000μs	AC discharge current 50Hz,1s 10times	Delivery time days	UL Certificate UL497B
3R75	75V ±20%	≤500V	≤ 600V	>1GΩ	10KA	200A	10A	15days	E505240
3R90	90V ±20%	≤500V	≤ 600V	>1GΩ	10KA	200A	10A	15days	E505240
3R140	140V±20%	≤500V	≤ 600V	>1GΩ	10KA	200A	10A	15days	E505240
3R150	150V±20%	≤500V	≤ 600V	>1GΩ	10KA	200A	10A	15days	E505240
3R200	200V±20%	≤600V	≤ 700V	>1GΩ	10KA	200A	10A	15days	E505240
3R230	230V±20%	≤600V	≤ 700V	>1GΩ	10KA	200A	10A	15days	E505240
3R250	250V±20%	≤600V	≤ 700V	>1GΩ	10KA	200A	10A	15days	E505240
3R300	300V±20%	≤800V	≤ 900V	>1GΩ	10KA	200A	10A	15days	E505240
3R350	350V±20%	≤900V	≤ 1000V	>1GΩ	10KA	200A	10A	15days	E505240
3R400	400V±20%	≤900V	≤ 1000V	>1GΩ	10KA	200A	10A	15days	E505240
3R420	420V±20%	≤900V	≤ 1000V	>1GΩ	10KA	200A	10A	15days	E505240
3R470	470V±20%	≤1100V	≤ 1200V	>1GΩ	10KA	200A	10A	15days	E505240
3R500	500V±20%	≤1100V	≤ 1200V	>1GΩ	10KA	200A	10A	15days	E505240
3R550	550V±20%	≤1300V	≤ 1400V	>1GΩ	10KA	200A	10A	15days	E505240
3R600	600V±20%	≤1300V	≤1400V	>1GΩ	10KA	200A	10A	15days	E505240
3R800	800V±20%	≤1500V	≤1600V	>1GΩ	10KA	200A	10A	15days	---

HUAAN 华兴安电子 HUAAN LIMITED

Φ8*10mm

3-Electrode Gas Discharge Tubes 10KA

1:At delivery AQL 0.65 leave Ⅱ Military Standard 105 E
2:In ionized mode
3:Test according to ITU-T Rec.k.12


Environmental resistance

Storage temperature:	-40℃---+90℃
Operating temperature:	-40℃---+90℃
Electrode:	Tin Plated


Example Part Number: HA3R8-90M

HA	=	**HUAAN**
3	=	**3 Electrode device**
R	=	**Gas Discharge Tube**
8	=	**8mm Diameter**
90	=	**90V**
M	=	**Medium Surge 10KA**

Reflow Soldering Curve

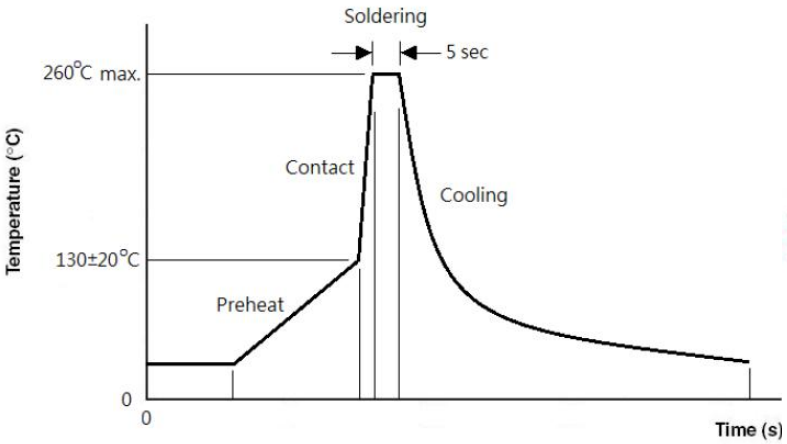

Packaging Information

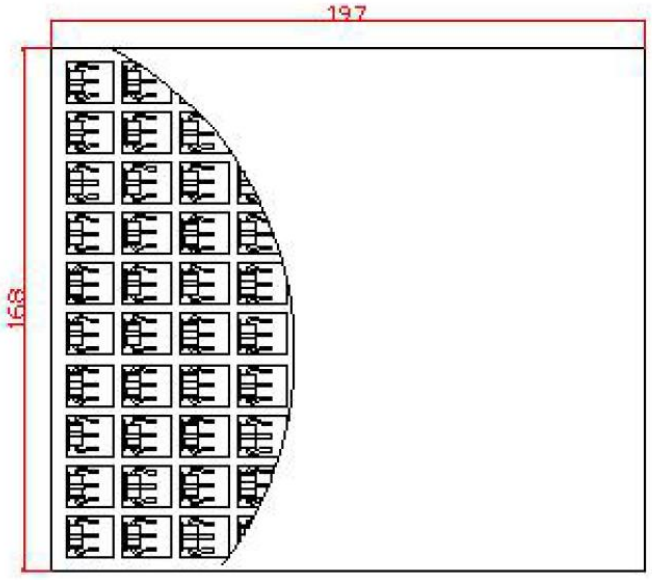

Packaging Quantity

Part Number	Quantity	
	Per Tray	Per Carton
3R-xxx Series	**100PCS**	**5000PCS**