

1. Mechanical Dimensions:

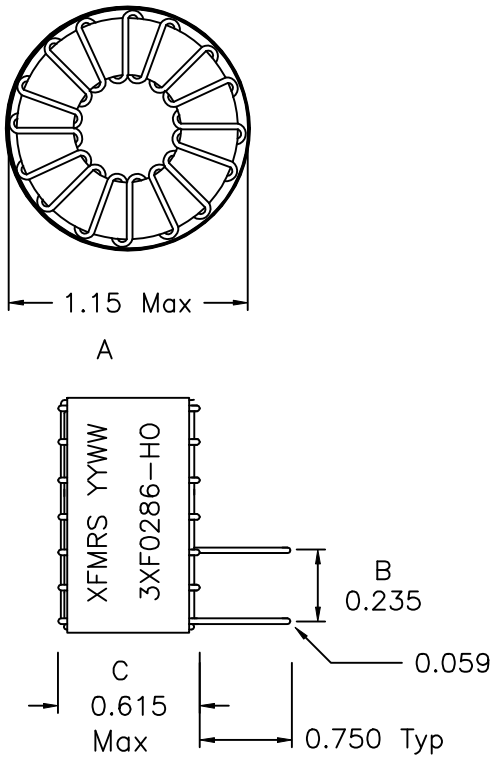

2. Schematic:



3. Electrical Specifications:

Inductance: 28uH ±15% @10KHz, 1.0V

Inductance: 50uH ±15% @10KHz, 1.0V, 10Aac

DC Resistance: 0.010 Ohms Max.

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C
6. the tinned length is the same as the lead length.

DOC. REV. A/1

XFMRS Inc.	Title: AC Toroid Inductor		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: 3XF0286-HO		REV. A
	DWN.	李小锋	Feb-6-03
	CHK.	袁玉坤	Feb-6-03
SHEET 1 OF 1	APP.	BW	Feb-6-03

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION