


LNQ Series

- 2 Package Sizes
- High 'Q'
- Wide Inductance Range
- Low dcR
- Typical Reel Size 2000pcs



The **LNQ** series comes in two sizes approximate to EIA packages 1210, and 1812. Suitable applications include:- Pagers, Cordless Phones, Portable GPS, Remote Metering and Sensors where optimum battery performance is required.


COMPONENT OUTLINE

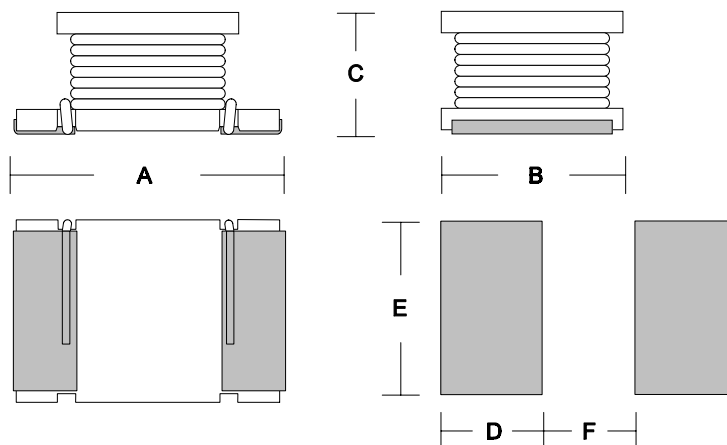

DIMENSIONS

ECM Type	Inductance Range	A (mm)	B	C	D	E	F
LNQ32T	0.1uH~560uH	3.20	2.50	2.00	1.50	2.00	1.00
LNQ45T	1.0uH~2.2mH	4.50	3.20	2.60	2.00	3.00	1.20

ECM SMD Ferrite Chip Inductors

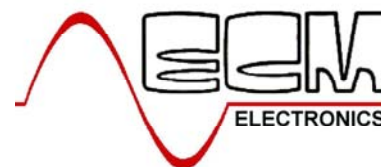

ECM Part	L (μH)	Tol %	Q Min. @ MHz	SRF Min. (MHz)	R_{DC} MAX (Ω)	I_{DC} I_N (mA)
-----------------	----------------------------------	------------------	-------------------------	-------------------------------	---	--

LNQ32T Series (1210)


LNQ32T-R10	0.10 @ 1MHz	M	20 @ 25.2MHz	200	0.25	700
LNQ32T-R18	0.18 @ 1MHz	M	20 @ 25.2MHz	200	0.25	650
LNQ32T-R27	0.27 @ 1MHz	M	25 @ 25.2MHz	200	0.25	600
LNQ32T-R39	0.39 @ 1MHz	M	25 @ 25.2MHz	200	0.25	530
LNQ32T-R56	0.56 @ 1MHz	M	30 @ 25.2MHz	160	0.25	530
LNQ32T-R68	0.68 @ 1MHz	M	30 @ 25.2MHz	160	0.25	470
LNQ32T-R82	0.82 @ 1MHz	M	30 @ 25.2MHz	120	0.25	450
LNQ32T-1R0	1.0 @ 1MHz	M	20 @ 1MHz	100	0.50	445
LNQ32T-1R2	1.2 @ 1MHz	M	20 @ 1MHz	100	0.60	425
LNQ32T-1R5	1.5 @ 1MHz	M,K	20 @ 1MHz	75	0.60	400
LNQ32T-1R8	1.8 @ 1MHz	M,K	20 @ 1MHz	60	0.70	390
LNQ32T-2R2	2.2 @ 1MHz	M,K	20 @ 1MHz	50	0.80	370
LNQ32T-2R7	2.7 @ 1MHz	M,K	20 @ 1MHz	43	0.90	320
LNQ32T-3R3	3.3 @ 1MHz	M,K	20 @ 1MHz	38	1.0	300
LNQ32T-3R9	3.9 @ 1MHz	M,K	20 @ 1MHz	35	1.1	290
LNQ32T-4R7	4.7 @ 1MHz	M,K	20 @ 1MHz	31	1.2	270
LNQ32T-5R6	5.6 @ 1MHz	M,K	20 @ 1MHz	28	1.3	250
LNQ32T-6R8	6.8 @ 1MHz	M,K	20 @ 1MHz	25	1.5	240
LNQ32T-8R2	8.2 @ 1MHz	M,K	20 @ 1MHz	23	1.6	225
LNQ32T-100	10 @ 1MHz	K,J	35 @ 1MHz	20	1.8	190
LNQ32T-120	12 @ 1MHz	K,J	35 @ 1MHz	18	2.0	180
LNQ32T-150	15 @ 1MHz	K,J	35 @ 1MHz	16	2.2	170
LNQ32T-180	18 @ 1MHz	K,J	35 @ 1MHz	15	2.5	165
LNQ32T-220	22 @ 1MHz	K,J	35 @ 1MHz	14	2.8	150
LNQ32T-270	27 @ 1MHz	K,J	35 @ 1MHz	13	3.1	125
LNQ32T-330	33 @ 1MHz	K,J	40 @ 1MHz	12	3.5	115
LNQ32T-390	39 @ 1MHz	K,J	40 @ 1MHz	11	3.9	110
LNQ32T-470	47 @ 1MHz	K,J	40 @ 1MHz	11	4.3	100
LNQ32T-560	56 @ 1MHz	K,J	40 @ 1MHz	10	4.9	85
LNQ32T-680	68 @ 1MHz	K,J	40 @ 1MHz	9	5.5	80
LNQ32T-820	82 @ 1MHz	K,J	40 @ 1MHz	8	6.2	70
LNQ32T-101	100 @ 1MHz	K,J	40 @ 0.796MHz	8	7.0	80
LNQ32T-121	120 @ 1MHz	K,J	40 @ 0.796MHz	7	8.0	75
LNQ32T-151	150 @ 1MHz	K,J	40 @ 0.796MHz	7	9.3	70
LNQ32T-181	180 @ 1MHz	K,J	40 @ 0.796MHz	6	10.2	65

TOLERANCES J=5%, K=10%, M=20%.

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.

ECM SMD Ferrite Chip Inductors

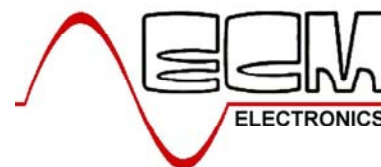

ECM Part	L (μH)	Tol %	Q Min. (**MHz)	SRF Min. (MHz)	R_{DC} MAX (Ω)	I_{DC} I_N (Ma)
-----------------	-------------------------	-----------------	--------------------------	--------------------------	---	---

LNQ32T Series (1210) Continued...

LNQ32T-221	220 @ 1MHz	K,J	40 @ 0.796MHz	6	11.8	65
LNQ32T-271	270 @ 1MHz	K,J	40 @ 0.796MHz	5	12.5	65
LNQ32T-331	330 @ 1MHz	K,J	40 @ 0.796MHz	5	13.0	65
LNQ32T-391	390 @ 1MHz	K,J	50 @ 0.796MHz	5	22.0	50
LNQ32T-471	470 @ 1kHz	K,J	50 @ 0.796MHz	5	25.0	45
LNQ32T-561	560 @ 1kHz	K,J	50 @ 0.796MHz	5	28.0	40

LNQ45T Series (1812)


LNQ45T-1R0	1.0 @ 1MHz	M	20 @ 1MHz	120	0.20	500
LNQ45T-1R2	1.2 @ 1MHz	M	20 @ 1MHz	100	0.20	500
LNQ45T-1R5	1.5 @ 1MHz	M	20 @ 1MHz	85	0.30	500
LNQ45T-1R8	1.8 @ 1MHz	M	20 @ 1MHz	75	0.30	500
LNQ45T-2R2	2.2 @ 1MHz	M	20 @ 1MHz	62	0.30	500
LNQ45T-2R7	2.7 @ 1MHz	M	20 @ 1MHz	53	0.32	500
LNQ45T-3R3	3.3 @ 1MHz	M	20 @ 1MHz	47	0.35	500
LNQ45T-3R9	3.9 @ 1MHz	M	20 @ 1MHz	41	0.38	500
LNQ45T-4R7	4.7 @ 1MHz	M,K	30 @ 1MHz	38	0.40	500
LNQ45T-5R6	5.6 @ 1MHz	M,K	30 @ 1MHz	33	0.47	500
LNQ45T-6R8	6.8 @ 1MHz	M,K	30 @ 1MHz	31	0.50	450
LNQ45T-8R2	8.2 @ 1MHz	M,K	30 @ 1MHz	27	0.56	450
LNQ45T-100	10 @ 1MHz	K,J	35 @ 1MHz	23	0.56	400
LNQ45T-120	12 @ 1MHz	K,J	35 @ 1MHz	21	0.62	380
LNQ45T-150	15 @ 1MHz	K,J	35 @ 1MHz	19	0.73	360
LNQ45T-180	18 @ 1MHz	K,J	35 @ 1MHz	17	0.82	340
LNQ45T-220	22 @ 1MHz	K,J	35 @ 1MHz	15	0.94	320
LNQ45T-270	27 @ 1MHz	K,J	35 @ 1MHz	14	1.1	300
LNQ45T-330	33 @ 1MHz	K,J	35 @ 1MHz	12	1.2	270
LNQ45T-390	39 @ 1MHz	K,J	35 @ 1MHz	11	1.4	240
LNQ45T-470	47 @ 1MHz	K,J	35 @ 1MHz	10	1.5	220
LNQ45T-560	56 @ 1MHz	K,J	35 @ 1MHz	9	1.7	200
LNQ45T-680	68 @ 1MHz	K,J	35 @ 1MHz	8	1.9	180
LNQ45T-820	82 @ 1MHz	K,J	35 @ 1MHz	7	2.2	170
LNQ45T-101	100 @ 1MHz	K,J	40 @ 0.796MHz	6	2.5	160
LNQ45T-121	120 @ 1MHz	K,J	40 @ 0.796MHz	6	3.0	150

TOLERANCES J=5%, K=10%, M=20%.

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.

ECM SMD Ferrite Chip Inductors

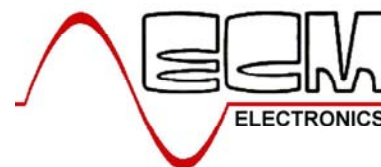

ECM Part	L (μH)	Tol %	Q Min. (**MHz)	SRF Min. (MHz)	R_{DC} MAX (Ω)	I_{DC} I_N (mA)
-----------------	----------------------------------	------------------	---------------------------	-------------------------------	---	--

LNQ45T Series (1812) Continued...

LNQ45T-151	150 @ 1MHz	K,J	40 @ 0.796MHz	5	3.7	130
LNQ45T-181	180 @ 1MHz	K,J	40 @ 0.796MHz	5	4.5	120
LNQ45T-221	220 @ 1MHz	K,J	40 @ 0.796MHz	4	5.4	110
LNQ45T-271	270 @ 1MHz	K,J	40 @ 0.796MHz	4	6.8	100
LNQ45T-331	330 @ 1MHz	K,J	40 @ 0.796MHz	3	8.2	95
LNQ45T-391	390 @ 1MHz	K,J	40 @ 0.796MHz	3	9.7	90
LNQ45T-471	470 @ 1kHz	K,J	40 @ 0.796MHz	3	11.8	80
LNQ45T-561	560 @ 1kHz	K,J	40 @ 0.796MHz	2	14.5	70
LNQ45T-681	680 @ 1kHz	K,J	40 @ 0.796MHz	2	17.0	65
LNQ45T-821	820 @ 1kHz	K,J	40 @ 0.796MHz	2	20.5	60
LNQ45T-102	1000 @ 1kHz	K,J	40 @ 0.252MHz	2	25.0	50
LNQ45T-122	1200 @ 1kHz	K,J	40 @ 0.252MHz	2	30.0	45
LNQ45T-152	1500 @ 1kHz	K,J	40 @ 0.252MHz	1	37.0	40
LNQ45T-182	1800 @ 1kHz	K,J	40 @ 0.252MHz	1	45.0	35
LNQ45T-222	2200 @ 1kHz	K,J	40 @ 0.252MHz	1	50.0	30

TOLERANCES J=5%, K=10%, M=20%.

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.