


DWG. NO. 400-010-6040G			
REV	DESCRIPTION	BY	APPD
B	ECR 7213	1/21/02	JS

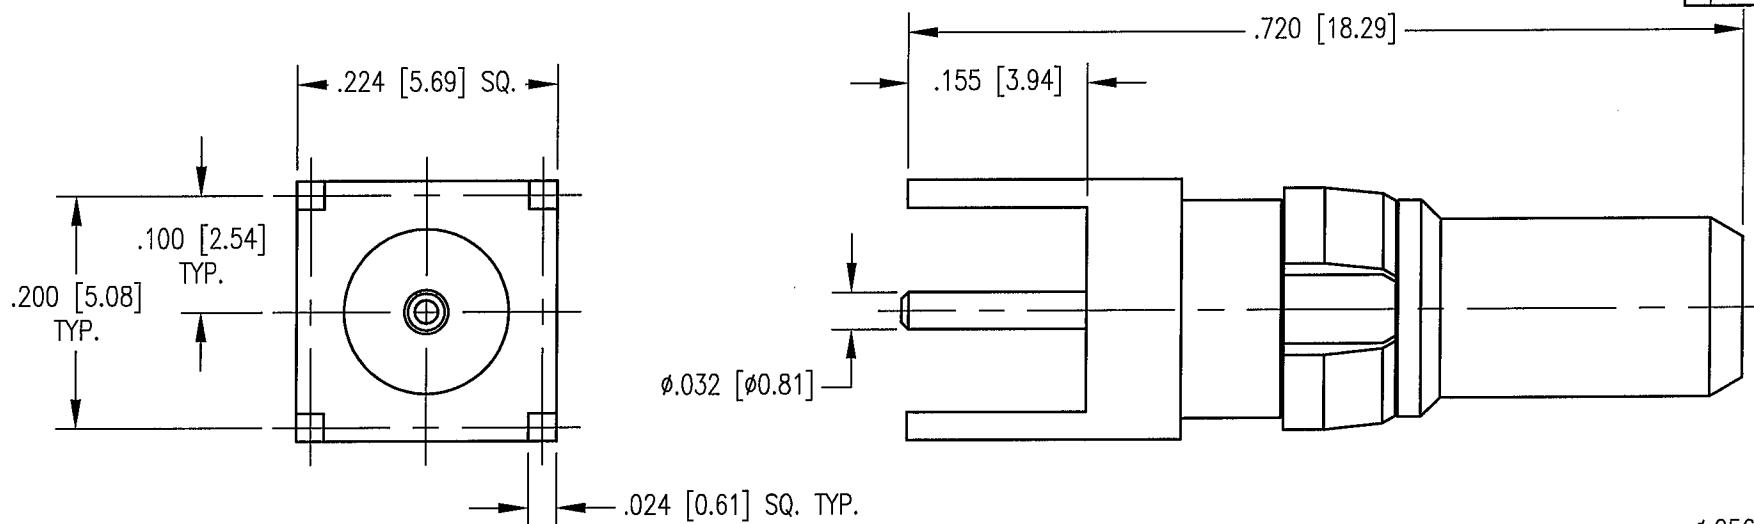

NOTES:

1. MATERIALS:

BODY: BRASS PER ASTM B16

CONTACT: COPPER ALLOY

CLIP RING: BERYLLIUM COPPER PER ASTM B194


INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

BODY AND CONTACT: .000030 MIN. GOLD PER MIL-G-45204
OVER .000050 MIN. NICKEL PER QQ-N-290

CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER
COPPER FLASH

3. FOR USE IN DIN 41612 HOUSING.

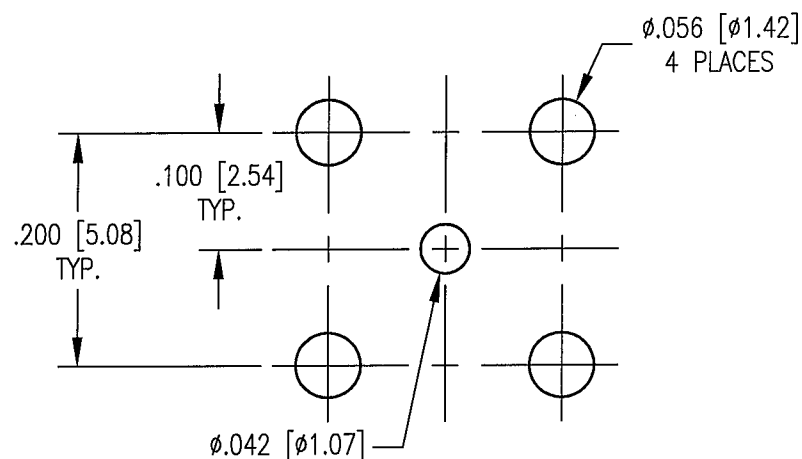

RECOMMENDED MOUNTING HOLES

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		Litton	
TOLERANCES: DECIMALS .XX ± .01/0.254 XXX ± .005/0.127 ANGLES ± 2°		Winchester/Retconn 400 Park Road Watertown, Connecticut 06795	
CUSTOMER DRAWING		TITLE	
DRAWN MJF DATE 1/21/02 CHECKED JS DATE 1/22/02		31 SERIES FOR DIN HOUSING	
APPROVED JS DATE 1/22/02		A 400-010-6040G	
		SHT. 1	OF 1
		REV. B	