
AUDIO FILTER AMPLIFIER

■ GENERAL DESCRIPTION


The NJM2133 is a dual audio filter amplifier for digital audio. It includes two-channel voltage follower, capacitors, and resistors for Low Pass Filter. It also includes standby function which applies to low consumption power design.

It is suitable for CD , CD-ROM , DVD , and any other digital audio equipments.

■ PACKAGE OUTLINE



NJM2133D



NJM2133M




NJM2133V

■ FEATURES

- Single Supply
- Operating Voltage (V^+=4.5～5.5V)
- Internal voltage follower (Two channels)
- Internal C and R for LPF
- Standby Function
- Mute Function
- High S/N Retio (86dB typ.)
- Bipolar Technology
- Package Outline DIP14, DMP14, SSOP14

■ PIN CONFIGURATION

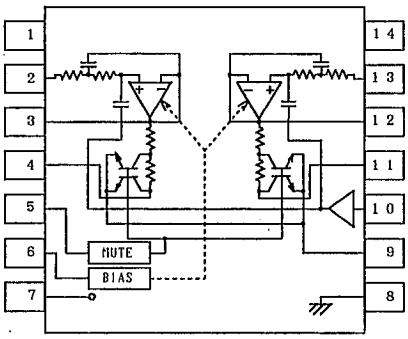

NJM2133D
NJM2133M
NJM2133V

PIN FUNCTION

1:NC	8:GND
2:IN1	9:REF2
3:OUT1	10:REF1
4:MUTE1	11:MUTE 2
5:MUTE	12:OUT2
6:STANDBY	13:IN2
7:V^+	14:NC


■ ABSOLUTE MAXIMUM RATINGS (Ta=25℃)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	12	V
Power Dissipation	P_D	(DIP8) 700 (DMP8) 300 (SSOP8) 300	mW
Operating Temperature Range	T_{opr}	-25～+75	℃
Storage Temperature Range	T_{stg}	-40～+125	℃


■ ELECTRICAL CHARACTERISTICS (V^+=5V, f=1kHz, Vi=1.0Vrms, Vref1=2.5V, Vref2=2.5V, RL=10kΩ, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	Icc1		—	4.0	6.0	mA
Standby Operating Current	Icc2	6pin=GND	—	1	—	mA
Voltage Gain1	Gv1		-1.0	0	1.0	dB
Voltage gain2	ΔGv2	f=20kHz, Difference from Gv1	-0.5	0	0.5	dB
Voltage Gain3	Gv3	f=80kHz	—	-3	—	dB
Channel Balance	ΔGv1	at Gv1	-0.5	0	0.5	dB
Total Harmonic Distortion	THD	Vo=0.2Vrms	—	0.015	0.05	%
S/N Ratio	S/N	BW=20~20kHz, Rg=0Ω Vi=1.0Vrms reference	80	86	—	dB
Channel Separation	CS	Measuring CH:no signal, BW=20~20kHz Other CH:Vi=1.0Vrms	74	80	—	dB
Mute Attenuation	ATT	Vi=1.0Vrms, 5pin=V^+, 6pin=GND	70	90	—	dB
Output Offset Voltage Drift	Voff	at Mute ON/OFF	-10	0	10	mV
Mute Voltage	Vmute	5pin, at Mute	3.5	—	—	V
Standby Voltage	Vstb	6pin, at Standby	—	—	1.0	V

■ APPLICATION CIRCUIT

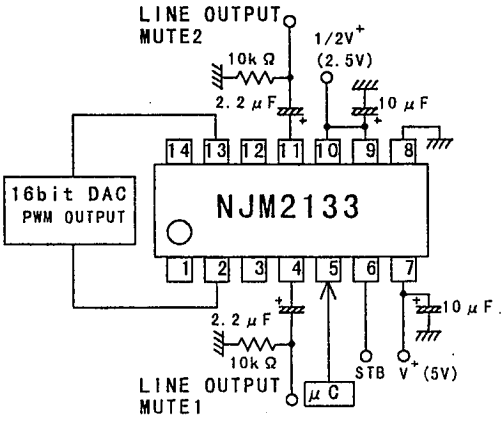


■ POWER ON TIMING CHART

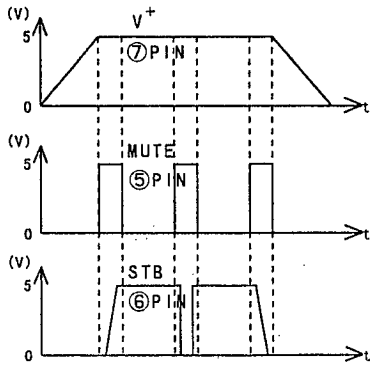


5

■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage
(Ta=25℃)

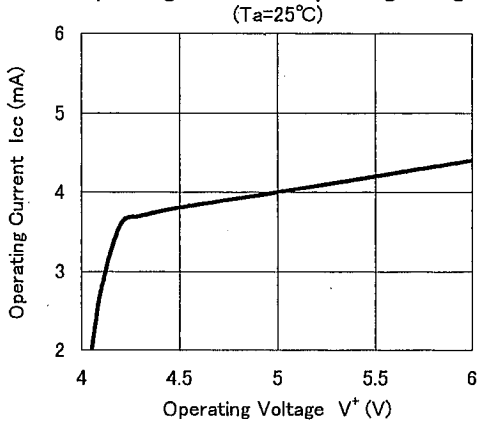


Operating Current vs. Temperature
(V^+=5V)

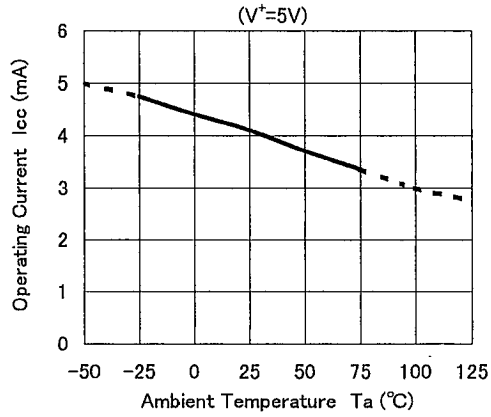


Voltage Gain vs. Frequency
(Ta=25℃)

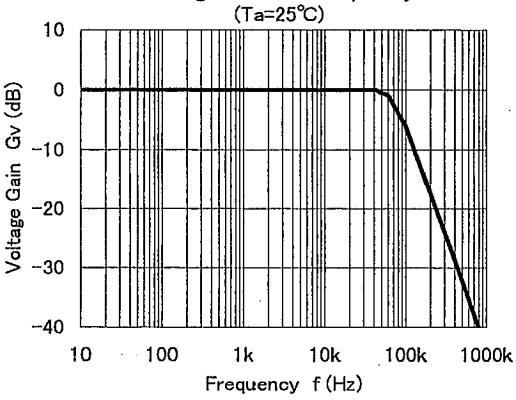


Voltage Gain1 vs. Temperature
(f=100kHz)

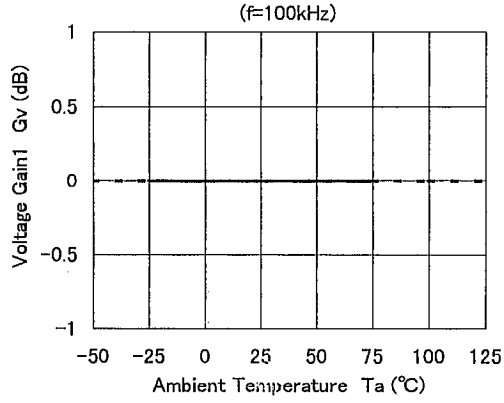

Voltage Gain2 vs. Temperature
(f=1kHz)

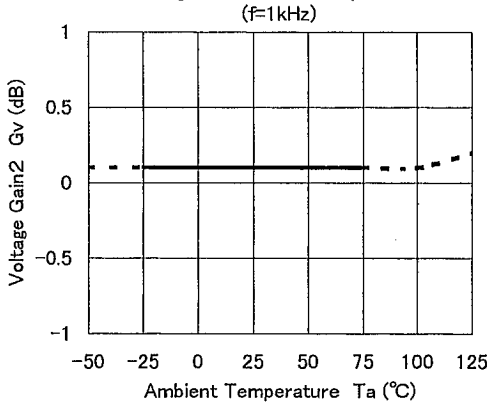


Voltage Gain3 vs. Temperature
(f=1kHz)

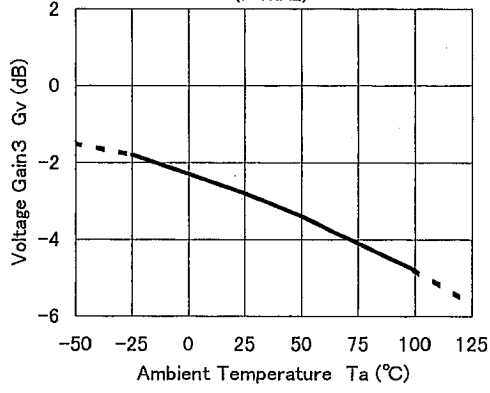


■ TYPICAL CHARACTERISTICS


Channel Balance vs. Temperature
(f=1kHz)

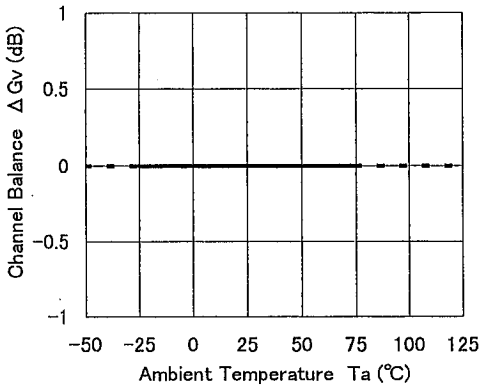


Total Harmonic Distortion vs. Output Voltage
(Ta=25°C)

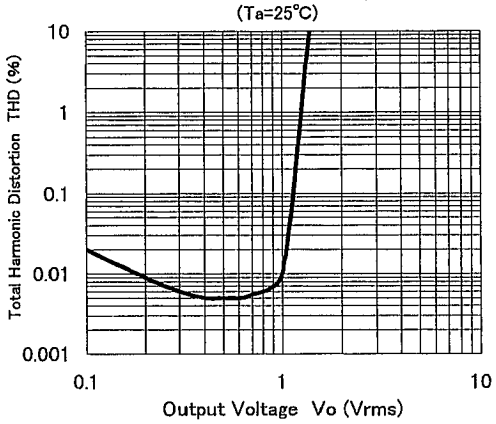


Total Harmonic Distortion vs. Temperature
(Vo=0.2Vrms)

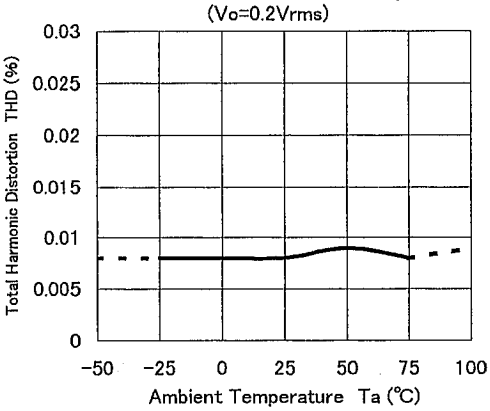


S/N Retio vs. Temperature
(V^+=5V)

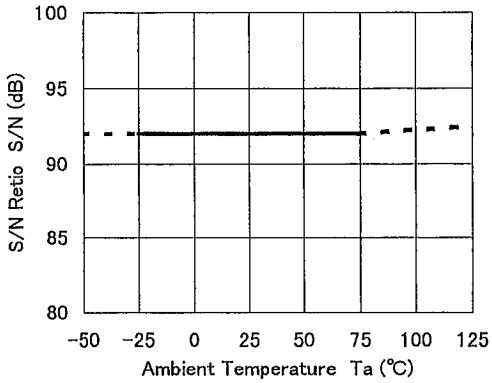

Channel Separation vs. Input Voltage
(Ta=25°C)

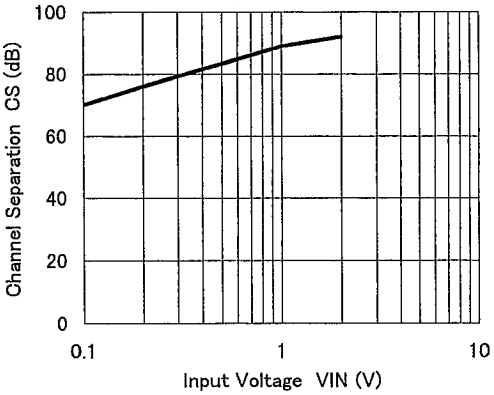


Channel Separation vs. Temperature
(V_{IN}=1.5Vrms)

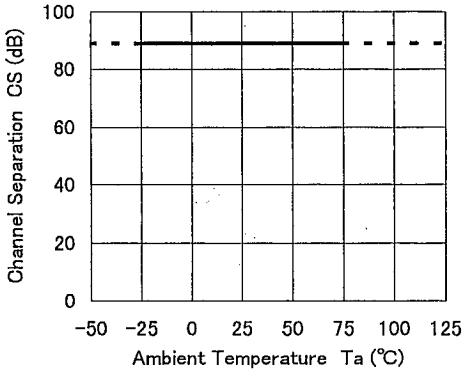


5

■ TYPICAL CHARACTERISTICS


Mute Attenuation vs. Input Voltage
(Ta=25℃)

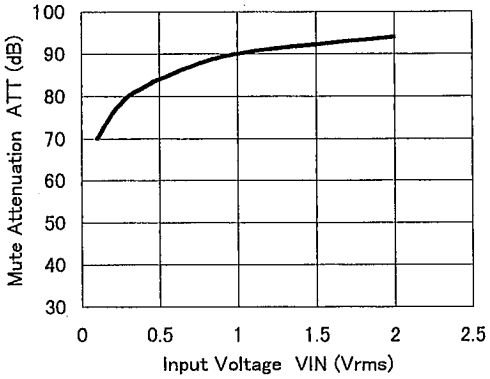


Mute Attenuation vs. Temperature
(V_{IN}=1.0Vrms)

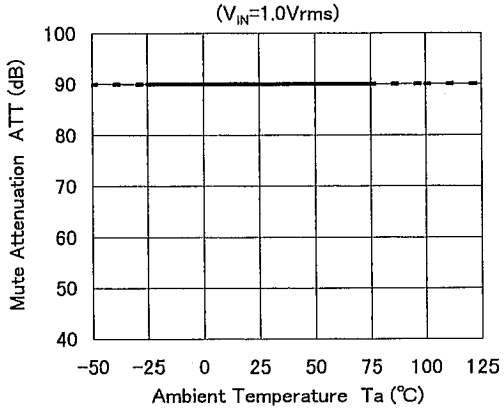


Mute Attenuation vs. Mute Voltage
(Ta=25℃)

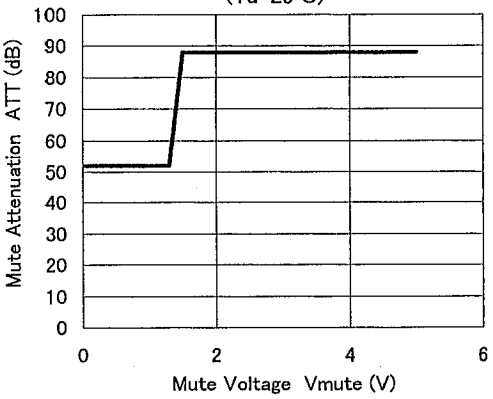


Output Offset Voltage vs. Temperature
(V^+=5V)

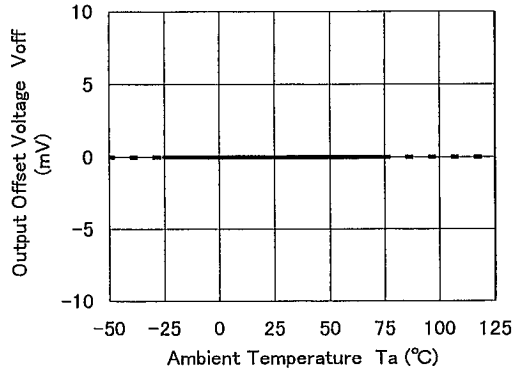

Operating Current vs. Standby Voltage
(Ta=25℃)

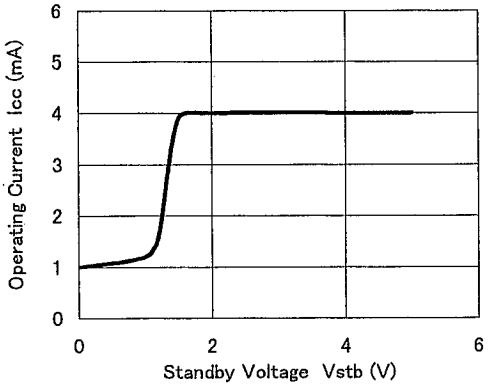

Operating Current vs. Temperature
(Vstb=1.0V)

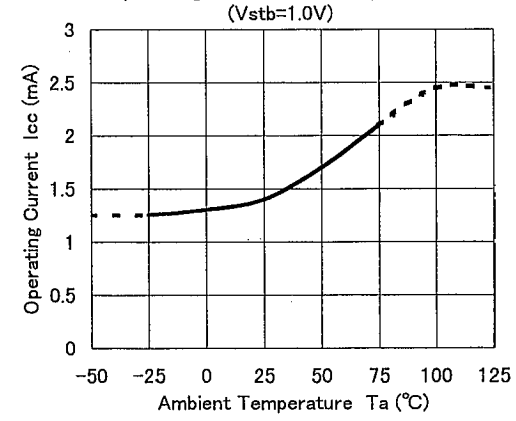

5

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.