

## FAN4852

### 9MHz Low-Power Dual CMOS Amplifier

#### Features

- 0.8mA Supply Current
- 9 MHz Bandwidth
- Output Swing to within 10mV of Either Rail
- Input Voltage Range Exceeds the Rails
- 6V/ $\mu$ s Slew Rate
- 11nV/ $\sqrt{\text{Hz}}$  Input Voltage Noise
- Fully Specified at +3.3V and +5V Supplies

#### Applications

- Piezoelectric Sensors
- PCMCIA, USB
- Mobile Communications / Battery-Powered Devices
- Notebooks and PDAs
- Active Filters
- Signal Conditioning
- Portable Test Instruments

#### Description

The FAN4852 is a dual, rail-to-rail output, low-power, CMOS amplifier that consumes only 800 $\mu$ A of supply current, while providing  $\pm 50$ mA of output short-circuit current. This amplifier is designed to operate supplies from 2.5V to 5V.

Additionally, the FAN4852 is EMI hardened, which minimizes EMI interference. It has a maximum input offset voltage of 1mV and an input common-mode range that includes ground.

The FAN4852 is designed on a CMOS process and provides 9MHz of bandwidth and 6V/ $\mu$ s of slew rate. The combination of low-power, low-voltage operation and a small package make this amplifier well suited for general-purpose and battery-powered applications.

#### Ordering Information

| Part Number  | Operating Temperature Range | Package             | Packing Method        |
|--------------|-----------------------------|---------------------|-----------------------|
| FAN4852IMU8X | -40 to +85°C                | 8-Lead MSOP Package | 3000 on Tape and Reel |

## Pin Configuration

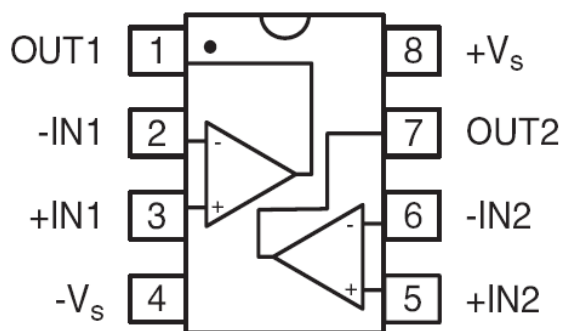


Figure 1. Pin Assignments

## Pin Definitions

| Pin # | Name | Description               |
|-------|------|---------------------------|
| 1     | OUT1 | Output, Channel 1         |
| 2     | -IN1 | Negative Input, Channel 1 |
| 3     | +IN1 | Positive Input, Channel 1 |
| 4     | -Vs  | Negative Supply           |
| 5     | +IN2 | Positive Input, Channel 2 |
| 6     | -IN2 | Negative Input, Channel 2 |
| 7     | OUT2 | Output, Channel 2         |
| 8     | +Vs  | Positive Supply           |

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Functional operation under any of these conditions is NOT implied. Performance and reliability are guaranteed only if operating conditions are not exceeded.

| Symbol        | Parameter                         | Min.       | Max.       | Unit |
|---------------|-----------------------------------|------------|------------|------|
| $V_{CC}$      | Supply Voltage                    | 0          | 6          | V    |
| $V_{IN}$      | Input Voltage Range               | $-V_S-0.5$ | $+V_S+0.5$ | V    |
| $T_J$         | Junction Temperature              |            | +150       | °C   |
| $T_{STG}$     | Storage Temperature               | -65        | +150       | °C   |
| $T_L$         | Lead Soldering, 10 Seconds        |            | +260       | °C   |
| $\Theta_{JA}$ | Thermal Resistance <sup>(1)</sup> |            | 206        | °C/W |

### Note:

1. Package thermal resistance JEDEC standard, multi-layer test boards, still air.

## ESD Information

| Symbol | Parameter                         | Min. | Typ. | Max. | Unit |
|--------|-----------------------------------|------|------|------|------|
| ESD    | Human Body Model, JESD22-A114     |      | 8    |      | kV   |
|        | Charged Device Model, JESD22-C101 |      | 2    |      |      |

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol | Parameter                   | Min. | Typ. | Max. | Unit |
|--------|-----------------------------|------|------|------|------|
| $T_A$  | Operating Temperature Range | -40  |      | +85  | °C   |
| $V_S$  | Supply Voltage Range        | 2.5  | 3.3  | 5.0  | V    |

**Electrical Specifications at +3.3V**

+V<sub>S</sub>=+3.3V, -V<sub>S</sub>=0V, V<sub>CM</sub>=+V<sub>S</sub>/2, and R<sub>L</sub>=10KΩ to +V<sub>S</sub>/2, unless otherwise noted.

| Symbol               | Parameter                                       | Condition                                                                                 | Min. | Typ.  | Max. | Unit   |
|----------------------|-------------------------------------------------|-------------------------------------------------------------------------------------------|------|-------|------|--------|
| I <sub>S</sub>       | Supply Current <sup>(2)</sup>                   | T <sub>A</sub> =25°C                                                                      |      | 0.8   | 1.0  | mA     |
|                      |                                                 | Full Temperature Range                                                                    |      |       | 1.1  |        |
| I <sub>SC</sub>      | Short-Circuit Output Current <sup>(2)</sup>     | Sourcing V <sub>O</sub> =V <sub>CM</sub> , V <sub>IN</sub> =100mV, T <sub>A</sub> =25°C   | 25   | 50    |      | mA     |
|                      |                                                 | Sourcing V <sub>O</sub> =V <sub>CM</sub> , V <sub>IN</sub> =100mV, Full Temperature Range | 20   |       |      |        |
|                      |                                                 | Sinking V <sub>O</sub> =V <sub>CM</sub> , V <sub>IN</sub> =-100mV, T <sub>A</sub> =25°C   | 28   | 46    |      |        |
|                      |                                                 | Sinking V <sub>O</sub> =V <sub>CM</sub> , V <sub>IN</sub> =-100mV, Full Temperature Range | 20   |       |      |        |
| EMIRR                | EMI Rejection Ratio, +IN and -IN <sup>(4)</sup> | V <sub>RFpeak</sub> =100mVp, (-20dBVp) f=400MHz                                           |      | 75    |      | dB     |
|                      |                                                 | V <sub>RFpeak</sub> =100mVp, (-20dBVp) f=900MHz                                           |      | 78    |      |        |
|                      |                                                 | V <sub>RFpeak</sub> =100mVp, (-20dBVp) f=1800MHz                                          |      | 87    |      |        |
| PSRR                 | Power Supply Rejection Ratio <sup>(2)</sup>     | 2.7V≤V+≤3.3V, V <sub>O</sub> =1V, T <sub>A</sub> =25°C                                    | 75   | 95    |      | dB     |
|                      |                                                 | 2.7V≤V+≤3.3V, V <sub>O</sub> =1V, Full Temperature Range                                  | 74   |       |      |        |
| CMRR                 | Common Mode Rejection Ratio <sup>(2)</sup>      | -0.2V<V <sub>CM</sub> <V+-1.2V, T <sub>A</sub> =25°C                                      | 76   | 117   |      | dB     |
|                      |                                                 | -0.2V<V <sub>CM</sub> <V+-1.2V, Full Temperature Range                                    | 75   |       |      |        |
| CMIR                 | Input Common Mode Voltage Range <sup>(2)</sup>  | CMRR≥76dB                                                                                 | -0.2 |       | 2.1  | V      |
| V <sub>OS</sub>      | Input Offset Voltage <sup>(2)</sup>             | T <sub>A</sub> =25°C                                                                      |      | ±0.3  | ±1.0 | mV     |
|                      |                                                 | Full Temperature Range                                                                    |      |       | ±1.2 |        |
| dV <sub>IO</sub>     | Average Drift <sup>(3)</sup>                    |                                                                                           |      | ±0.4  | ±2.0 | μV/°C  |
| I <sub>OS</sub>      | Input Offset Current                            |                                                                                           |      | 1     |      | pA     |
|                      |                                                 | T <sub>A</sub> =                                                                          |      |       |      |        |
| I <sub>bn_Char</sub> | Input Bias Current <sup>(3)</sup>               | T <sub>A</sub> =25°C                                                                      |      | 0.1   | 10.0 | pA     |
|                      |                                                 | Full Temperature Range                                                                    |      |       | 500  |        |
| e <sub>n</sub>       | Input-Referred Voltage Noise                    | f=1kHz                                                                                    |      | 11    |      | nV/√Hz |
|                      |                                                 | f=10kHz                                                                                   |      | 10    |      |        |
| i <sub>n</sub>       | Input-Referred Current Noise                    | f=1kHz                                                                                    |      | 0.005 |      | pA/√Hz |

Continued on the following page...

**Electrical Specifications at +3.3V**

+V<sub>S</sub>=+3.3V, -V<sub>S</sub> = 0V, V<sub>CM</sub> = +V<sub>S</sub>/2, and R<sub>L</sub> = 10kΩ to +V<sub>S</sub>/2, unless otherwise noted.

| Symbol           | Parameter                                                                                          | Condition                                                                                                 | Min. | Typ.  | Max. | Unit |
|------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------|-------|------|------|
| V <sub>O</sub>   | Output Voltage Swing High <sup>(2)</sup><br>V <sub>O</sub> = (+V <sub>S</sub> ) - V <sub>OUT</sub> | R <sub>L</sub> =2kΩ to V+/2, T <sub>A</sub> =25°C                                                         |      | 21    | 35   | mV   |
|                  |                                                                                                    | R <sub>L</sub> =2kΩ to V+/2, Full Temperature Range                                                       |      |       | 43   |      |
|                  |                                                                                                    | R <sub>L</sub> =10kΩ to V+/2, T <sub>A</sub> =25°C                                                        |      | 4     | 10   |      |
|                  |                                                                                                    | R <sub>L</sub> =10kΩ to V+/2, Full Temperature Range                                                      |      |       | 12   |      |
|                  | Output Voltage Swing Low <sup>(2)</sup><br>V <sub>O</sub> = V <sub>OUT</sub> + (-V <sub>S</sub> )  | R <sub>L</sub> =2kΩ to V+/2, T <sub>A</sub> =25°C                                                         |      | 20    | 32   | mV   |
|                  |                                                                                                    | R <sub>L</sub> =2kΩ to V+/2, Full Temperature Range                                                       |      |       | 43   |      |
|                  |                                                                                                    | R <sub>L</sub> =10kΩ to V+/2, T <sub>A</sub> =25°C                                                        |      | 3     | 11   |      |
|                  |                                                                                                    | R <sub>L</sub> =10kΩ to V+/2, Full Temperature Range                                                      |      |       | 14   |      |
| GBW              | Gain Bandwidth Product                                                                             |                                                                                                           |      | 9     |      | MHz  |
| A <sub>VOL</sub> | Large Signal Voltage Gain <sup>(3)</sup>                                                           | R <sub>L</sub> =2kΩ, V <sub>O</sub> =0.15 to 1.65V, V <sub>O</sub> =3.15 to 1.65V, T <sub>A</sub> =25°C   | 100  | 114   |      | dB   |
|                  |                                                                                                    | R <sub>L</sub> =2kΩ, V <sub>O</sub> =0.15 to 1.65V, V <sub>O</sub> =3.15 to 1.65V, Full Temperature Range | 97   |       |      |      |
|                  |                                                                                                    | R <sub>L</sub> =10kΩ, V <sub>O</sub> =0.1 to 1.65V, V <sub>O</sub> =3.2 to 1.65V, T <sub>A</sub> =25°C    | 100  | 115   |      |      |
|                  |                                                                                                    | R <sub>L</sub> =10kΩ, V <sub>O</sub> =0.1 to 1.65V, V <sub>O</sub> =3.2 to 1.65V, Full Temperature Range  | 97   |       |      |      |
| R <sub>OUT</sub> | Closed-Loop Impedance                                                                              | f=6MHz                                                                                                    |      | 6     |      | Ω    |
| R <sub>IN</sub>  | Input Resistance                                                                                   |                                                                                                           |      | 10    |      | GΩ   |
| C <sub>IN</sub>  | Input Capacitance                                                                                  | Common Mode                                                                                               |      | 11    |      | pF   |
|                  |                                                                                                    | Differential Mode                                                                                         |      | 6     |      |      |
| Φ <sub>M</sub>   | Phase Margin                                                                                       |                                                                                                           |      | 86    |      | °    |
| SR               | Slew Rate                                                                                          | A <sub>v</sub> =+1, V <sub>O</sub> =1V <sub>pp</sub> 10%-90%                                              |      | 6.1   |      | V/μs |
| THD+N            | Total Harmonic Distortion + Noise                                                                  | f=1kHz, A <sub>v</sub> =1, BW=>500kHz                                                                     |      | 0.006 |      | %    |

**Notes:**

- 100% tested at T<sub>A</sub>=25°C.
- Guaranteed by characterization.
- EMI rejection ratio is defined as EMIRR – 20log (V<sub>RFpeak</sub> / ΔV<sub>OS</sub>).

**Electrical Specifications at +5V**

$+V_S = +5V$ ,  $-V_S = 0V$ ,  $V_{CM} = +V_S/2$ , and  $R_L = 10K\Omega$  to  $+V_S/2$ , unless otherwise noted.

| Symbol         | Parameter                                       | Condition                                                           | Min. | Typ.      | Max.      | Unit             |
|----------------|-------------------------------------------------|---------------------------------------------------------------------|------|-----------|-----------|------------------|
| $I_S$          | Supply Current <sup>(5)</sup>                   | $T_A = 25^\circ C$                                                  |      | 0.9       | 1.1       | mA               |
|                |                                                 | Full Temperature Range                                              |      |           | 1.2       |                  |
| $I_{SC}$       | Short-Circuit Output Current <sup>(5)</sup>     | Sourcing $V_O = V_{CM}$ , $V_{IN} = 100mV$ , $T_A = 25^\circ C$     | 60   | 90        |           | mA               |
|                |                                                 | Sourcing $V_O = V_{CM}$ , $V_{IN} = 100mV$ , Full Temperature Range | 48   |           |           |                  |
|                |                                                 | Sinking $V_O = V_{CM}$ , $V_{IN} = -100mV$ , $T_A = 25^\circ C$     | 58   | 90        |           |                  |
|                |                                                 | Sinking $V_O = V_{CM}$ , $V_{IN} = -100mV$ , Full Temperature Range | 44   |           |           |                  |
| EMIRR          | EMI Rejection Ratio, +IN and -IN <sup>(7)</sup> | $V_{RFpeak} = 100mVp$ , $(-20dBVp)$<br>$f = 400MHz$                 |      | 75        |           | dB               |
|                |                                                 | $V_{RFpeak} = 100mVp$ , $(-20dBVp)$<br>$f = 900MHz$                 |      | 78        |           |                  |
|                |                                                 | $V_{RFpeak} = 100mVp$ , $(-20dBVp)$<br>$f = 1800MHz$                |      | 87        |           |                  |
| PSRR           | Power Supply Rejection Ratio <sup>(5)</sup>     | $2.7V \leq V+ \leq 5.5V$ , $V_O = 1V$ , $T_A = 25^\circ C$          | 75   | 105       |           | dB               |
|                |                                                 | $2.7V \leq V+ \leq 5.5V$ , $V_O = 1V$ , Full Temperature Range      | 74   |           |           |                  |
| CMRR           | Common Mode Rejection Ratio <sup>(5)</sup>      | $-0.2V \leq V_{CM} \leq V+ - 1.2V$                                  | 77   | 122       |           | dB               |
| CMIR           | Input Common Mode Voltage Range <sup>(5)</sup>  | $CMRR \geq 77dB$                                                    | -0.2 |           | 3.8       | V                |
| $V_{OS}$       | Input Offset Voltage <sup>(5)</sup>             | $T_A = 25^\circ C$                                                  |      | $\pm 0.3$ | $\pm 1.0$ | mV               |
|                |                                                 | Full Temperature Range                                              |      |           | $\pm 1.2$ |                  |
| $dV_{IO}$      | Average Drift <sup>(6)</sup>                    |                                                                     |      | $\pm 0.4$ | $\pm 2.0$ | $\mu V/^\circ C$ |
| $I_{OS}$       | Input Offset Current                            |                                                                     |      | 1         |           | pA               |
|                |                                                 | $T_A =$                                                             |      |           |           |                  |
| $I_{bn\_Char}$ | Input Bias Current <sup>(6)</sup>               | $T_A = 25^\circ C$                                                  |      | 0.1       | 10.0      | pA               |
|                |                                                 | Full Temperature Range                                              |      |           | 500       |                  |
| $e_n$          | Input-Referred Voltage Noise                    | $f = 1kHz$                                                          |      | 11        |           | $nV/\sqrt{Hz}$   |
|                |                                                 | $f = 10kHz$                                                         |      | 10        |           | $nV/\sqrt{Hz}$   |
| $i_n$          | Input-Referred Current Noise                    | $f = 1kHz$                                                          |      | 0.005     |           | $pA/\sqrt{Hz}$   |

Continued on the following page...

**Electrical Specifications at +5V**

+V<sub>S</sub>=+5V, -V<sub>S</sub> = 0V, V<sub>CM</sub> = +V<sub>S</sub>/2, and R<sub>L</sub> = 10kΩ to +V<sub>S</sub>/2, unless otherwise noted.

| Symbol           | Parameter                                | Condition                                                                                               | Min. | Typ.  | Max. | Unit |
|------------------|------------------------------------------|---------------------------------------------------------------------------------------------------------|------|-------|------|------|
| V <sub>O</sub>   | Output Voltage Swing High <sup>(5)</sup> | R <sub>L</sub> =2kΩ to V <sub>+</sub> /2, T <sub>A</sub> =25°C                                          |      | 25    | 39   | mV   |
|                  |                                          | R <sub>L</sub> =2kΩ to V <sub>+</sub> /2, Full Temperature Range                                        |      |       | 47   |      |
|                  |                                          | R <sub>L</sub> =10kΩ to V <sub>+</sub> /2, T <sub>A</sub> =25°C                                         |      | 4     | 11   |      |
|                  |                                          | R <sub>L</sub> =10kΩ to V <sub>+</sub> /2, Full Temperature Range                                       |      |       | 13   |      |
|                  | Output Voltage Swing Low <sup>(5)</sup>  | R <sub>L</sub> =2kΩ to V <sub>+</sub> /2, T <sub>A</sub> =25°C                                          |      | 24    | 38   | mV   |
|                  |                                          | R <sub>L</sub> =2kΩ to V <sub>+</sub> /2, Full Temperature Range                                        |      |       | 50   |      |
|                  |                                          | R <sub>L</sub> =10kΩ to V <sub>+</sub> /2, T <sub>A</sub> =25°C                                         |      | 3     | 15   |      |
|                  |                                          | R <sub>L</sub> =10kΩ to V <sub>+</sub> /2, Full Temperature Range                                       |      |       | 1    |      |
| GBW              | Gain Bandwidth Product                   |                                                                                                         |      | 9     |      | MHz  |
| A <sub>VOL</sub> | Large Signal Voltage Gain <sup>(6)</sup> | R <sub>L</sub> =2kΩ, V <sub>O</sub> =0.15 to 2.5V, V <sub>O</sub> =4.85 to 2.5V, T <sub>A</sub> =25°C   | 105  | 118   |      | dB   |
|                  |                                          | R <sub>L</sub> =2kΩ, V <sub>O</sub> =0.15 to 2.5V, V <sub>O</sub> =4.85 to 2.5V, Full Temperature Range | 102  |       |      |      |
|                  |                                          | R <sub>L</sub> =10kΩ, V <sub>O</sub> =0.1 to 2.5V, V <sub>O</sub> =4.9 to 2.5V, T <sub>A</sub> =25°C    | 105  | 120   |      |      |
|                  |                                          | R <sub>L</sub> =10kΩ, V <sub>O</sub> =0.1 to 2.5V, V <sub>O</sub> =4.9 to 2.5V, Full Temperature Range  | 102  |       |      |      |
| R <sub>OUT</sub> | Closed-Loop Impedance                    | f=6MHz                                                                                                  |      | 6     |      | Ω    |
| R <sub>IN</sub>  | Input Resistance                         |                                                                                                         |      | 10    |      | GΩ   |
| C <sub>IN</sub>  | Input Capacitance                        | Common Mode                                                                                             |      | 11    |      | pF   |
|                  |                                          | Differential Mode                                                                                       |      | 6     |      |      |
| Φ <sub>M</sub>   | Phase Margin                             |                                                                                                         |      | 94    |      | °    |
| SR               | Slew Rate                                | A <sub>v</sub> =+1, V <sub>O</sub> =1V <sub>pp</sub> 10%-90%                                            |      | 6.2   |      | V/μs |
| THD+N            | Total Harmonic Distortion + Noise        | f=1kHz, A <sub>v</sub> =1, BW=>500kHz                                                                   |      | 0.006 |      | %    |

**Notes:**

- 100% tested at T<sub>A</sub>=25°C.
- Guaranteed by characterization.
- EMI rejection ratio is defined as EMIRR – 20log (V<sub>RFpeak</sub> / ΔV<sub>OS</sub>).

## Typical Performance Characteristics

$+V_S = +3.3V$ ,  $-V_S = 0V$ ,  $V_{CM} = +V_S/2$ , and  $R_L = 10K\Omega$  to  $+V_S/2$ , unless otherwise noted.

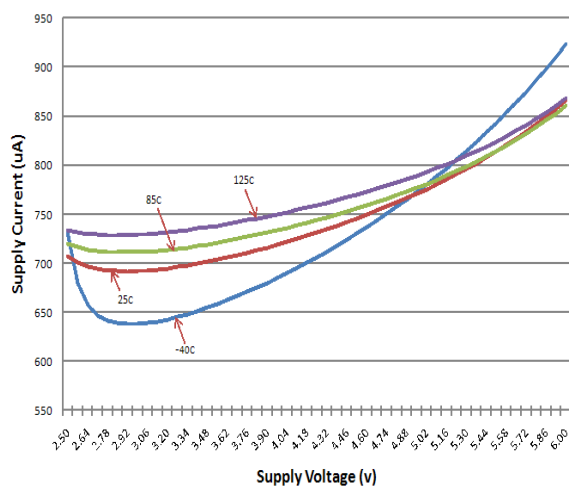


Figure 2. Supply Current vs. Supply Voltage

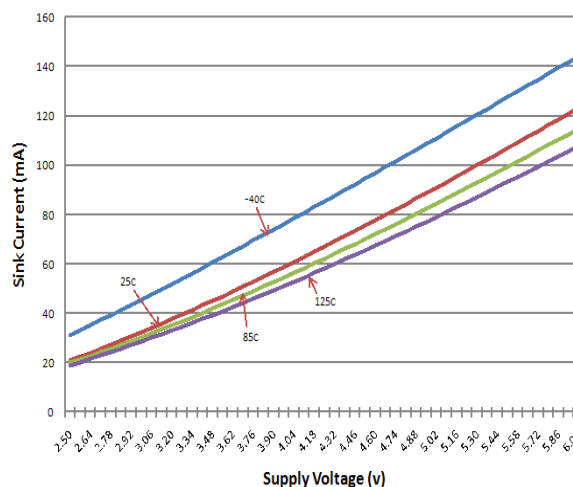


Figure 3. Sink Current vs. Supply Voltage

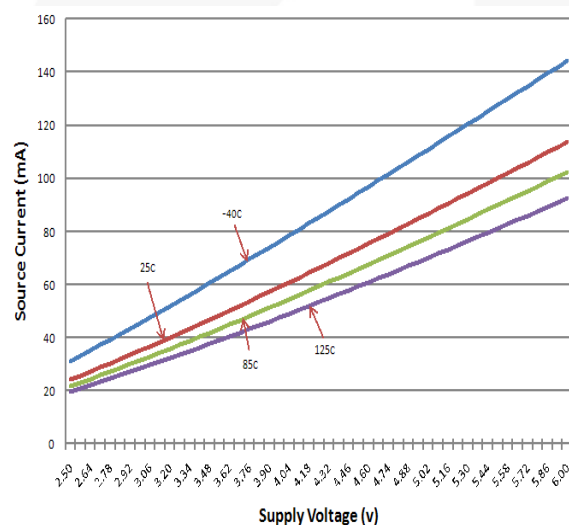


Figure 4. Source Current vs. Supply Voltage

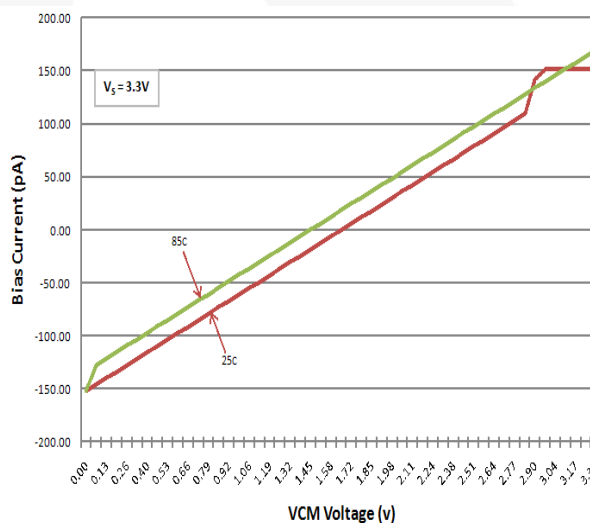


Figure 5. Input Bias Current vs.  $V_{CM}$  (3.3V)

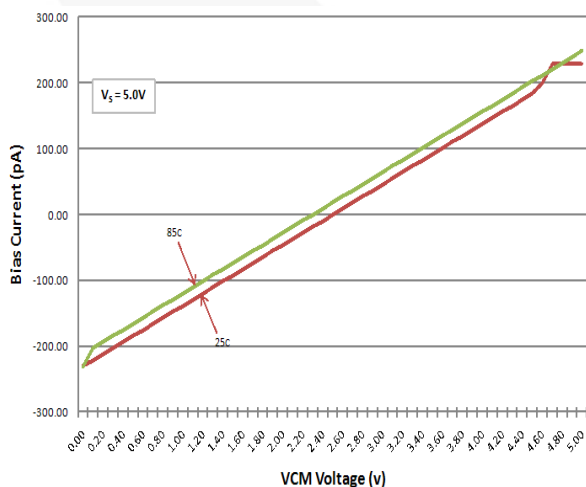


Figure 6. Input Bias Current vs.  $V_{CM}$  (5.0V)

## Typical Performance Characteristics

$+V_S = +3.3V$ ,  $-V_S = 0V$ ,  $V_{CM} = +V_S/2$ , and  $R_L = 10K\Omega$  to  $+V_S/2$ , unless otherwise noted.

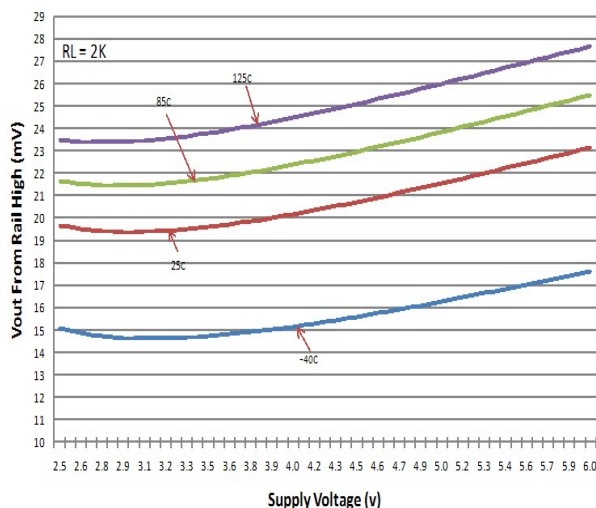


Figure 7. Output Swing High vs. Supply Voltage

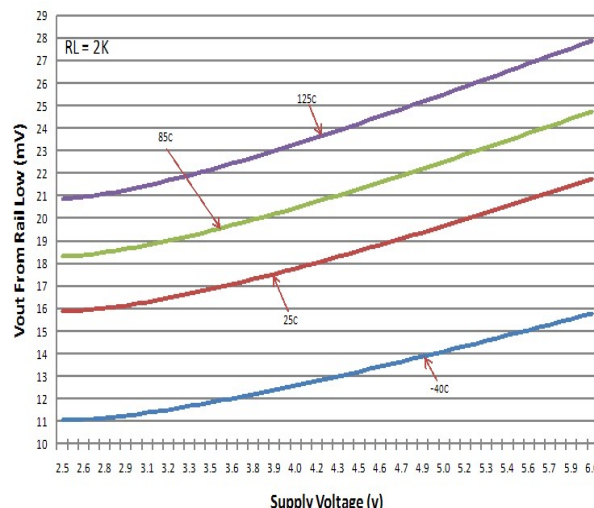


Figure 8. Output Swing Low vs. Supply Voltage

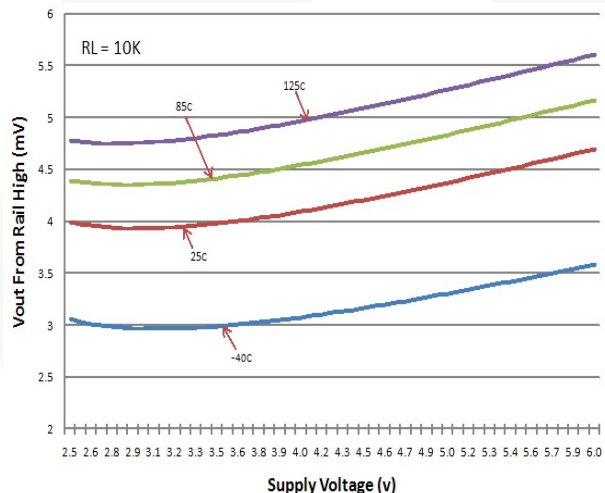


Figure 9. Output Swing High vs. Supply Voltage

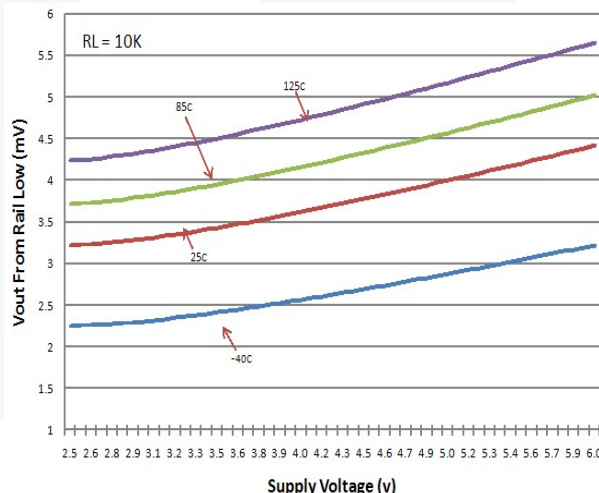


Figure 10. Output Swing Low vs. Supply Voltage

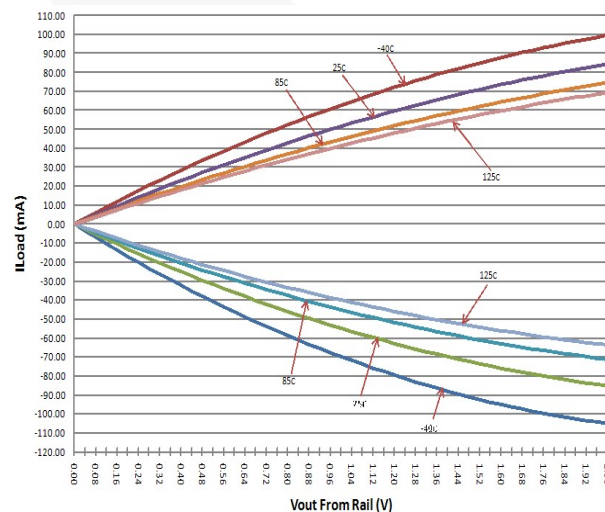


Figure 11. Output Voltage Swing vs. Load Current at 5.0V

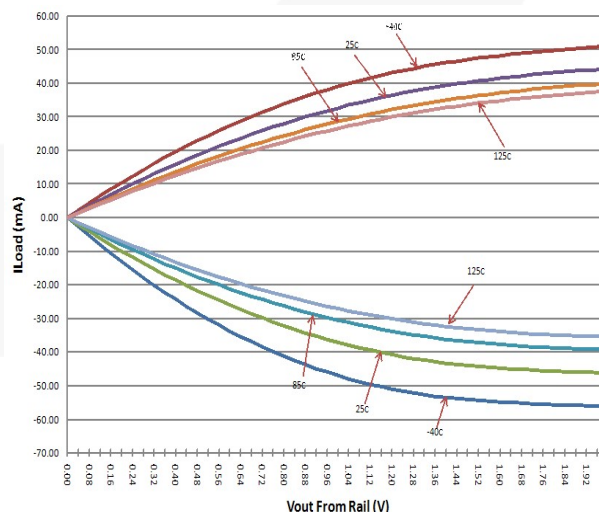


Figure 12. Output Voltage Swing vs. Load Current at 3.3V

## Typical Performance Characteristics

$+V_S = +3.3V$ ,  $-V_S = 0V$ ,  $V_{CM} = +V_S/2$ , and  $R_L = 10K\Omega$  to  $+V_S/2$ , unless otherwise noted.

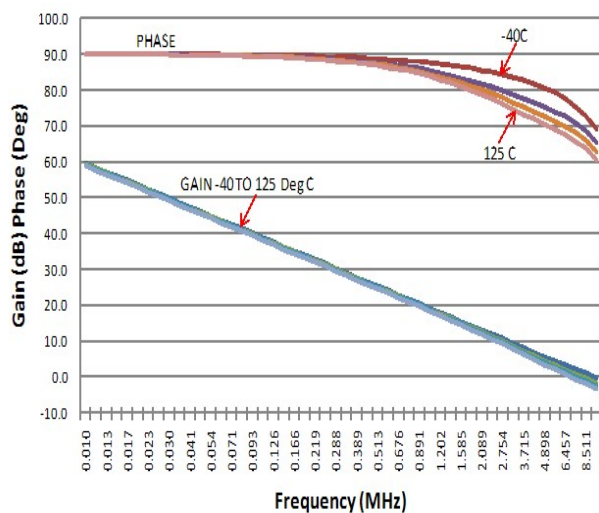


Figure 13. Open-Loop Gain/Phase vs. Temperature

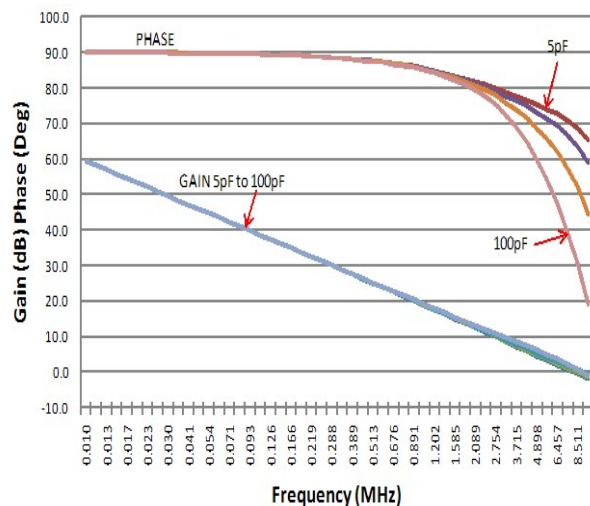


Figure 14. Open-Loop Gain/Phase vs. Load

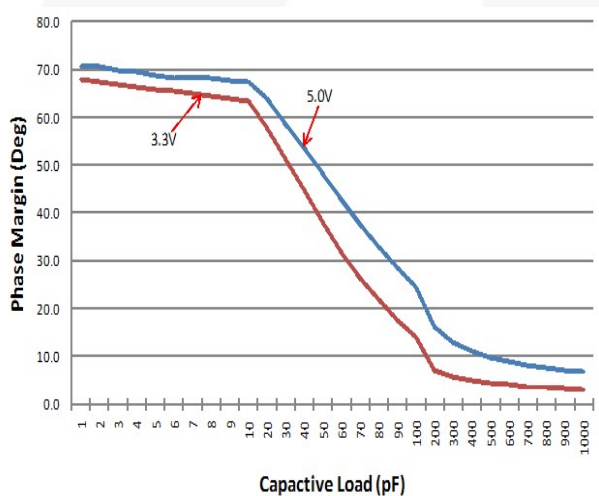


Figure 15. Phase Margin vs. Capacitive Load

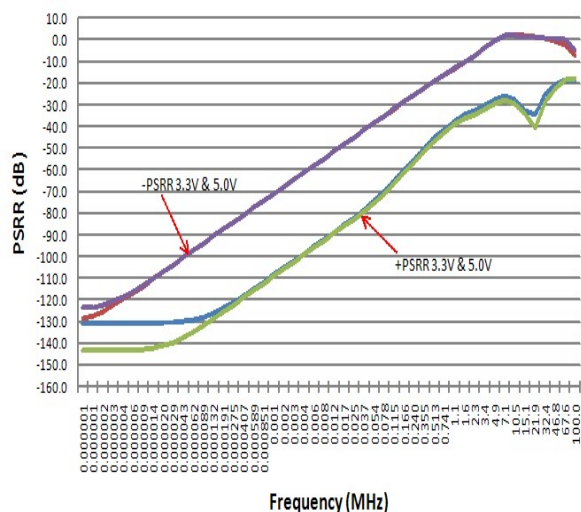


Figure 16. PSRR vs. Frequency

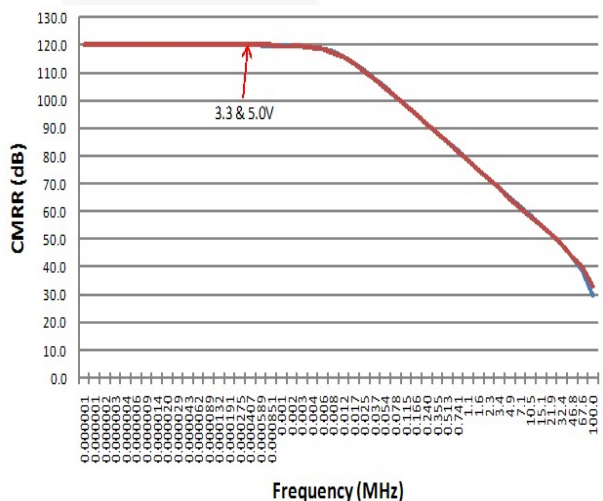


Figure 17. CMRR vs. Frequency

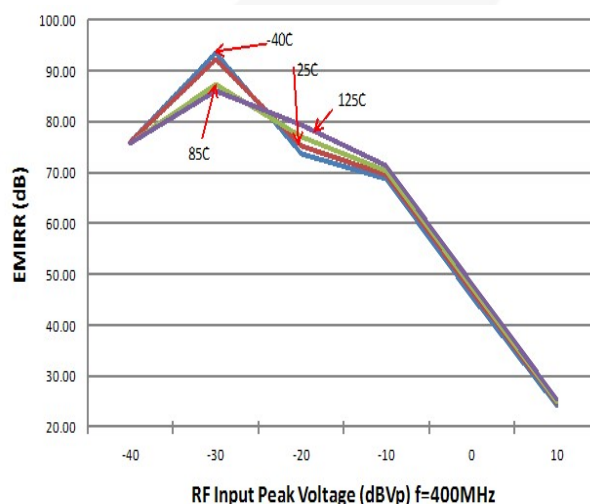


Figure 18. EMIRR vs. Power at 400MHz

## Typical Performance Characteristics

$+V_S = +3.3V$ ,  $-V_S = 0V$ ,  $V_{CM} = +V_S/2$ , and  $R_L = 10K\Omega$  to  $+V_S/2$ , unless otherwise noted.

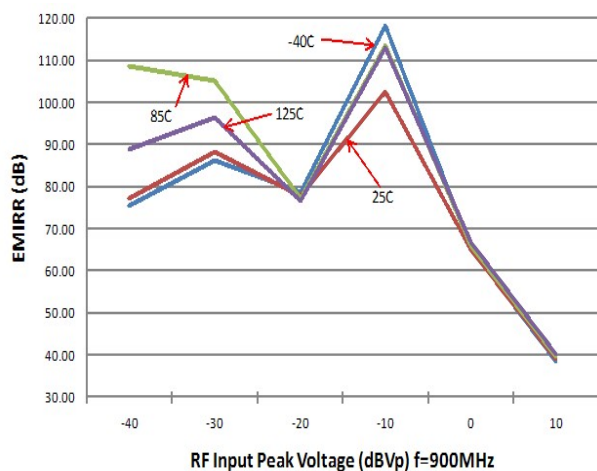


Figure 19. EMIRR vs. Power at 900MHz

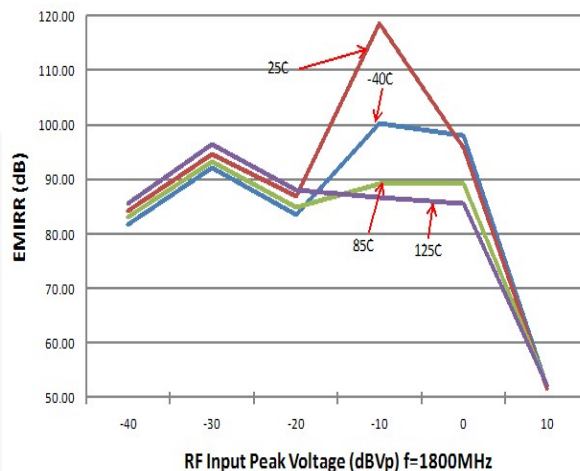


Figure 20. EMIRR vs. Power at 1800MHz

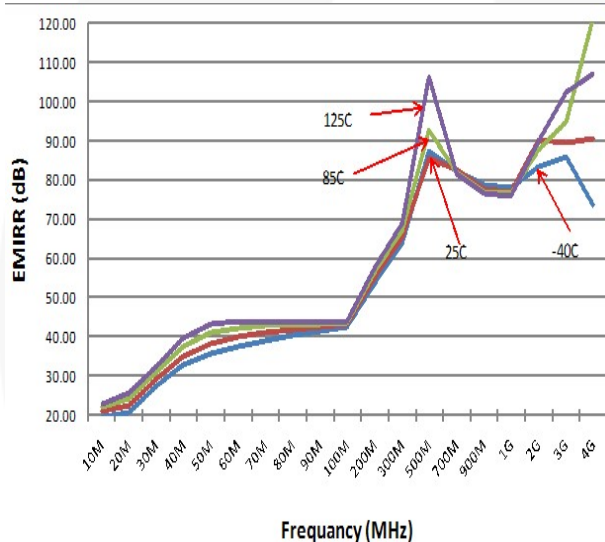


Figure 21. EMIRR vs. Frequency at 5.0V

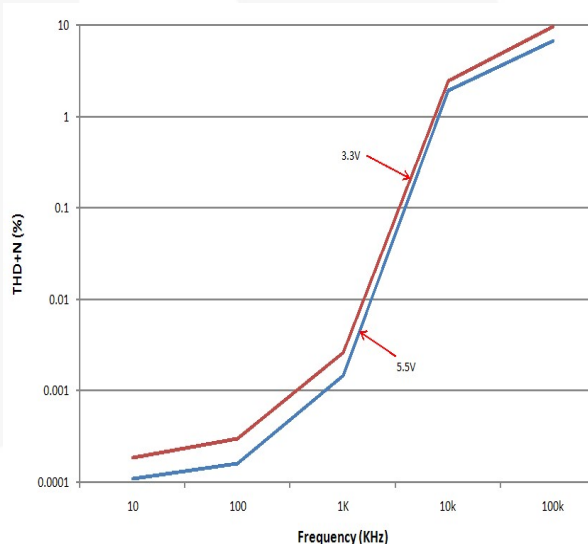


Figure 22. THD+N vs. Frequency

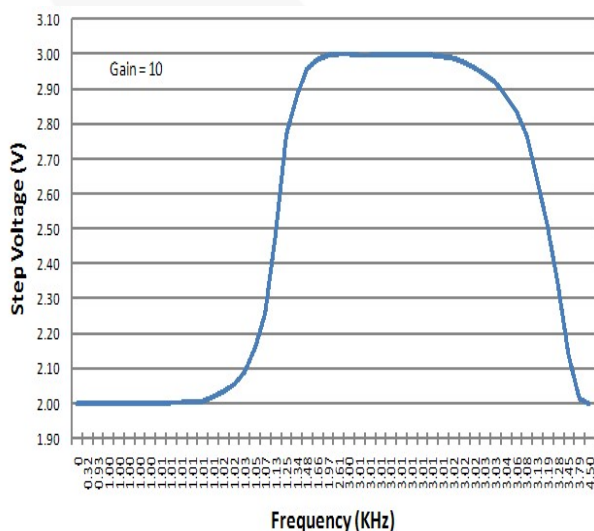


Figure 23. Large Signal Step Response

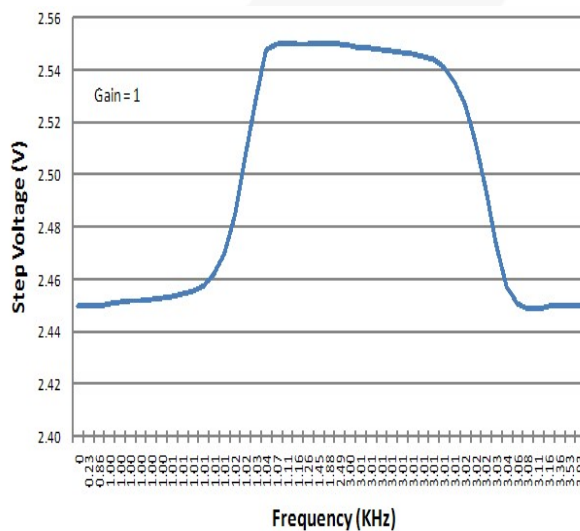


Figure 24. Small Signal Step Response

## Typical Performance Characteristics

$+V_S = +3.3V$ ,  $-V_S = 0V$ ,  $V_{CM} = +V_S/2$ , and  $R_L = 10K\Omega$  to  $+V_S/2$ , unless otherwise noted.

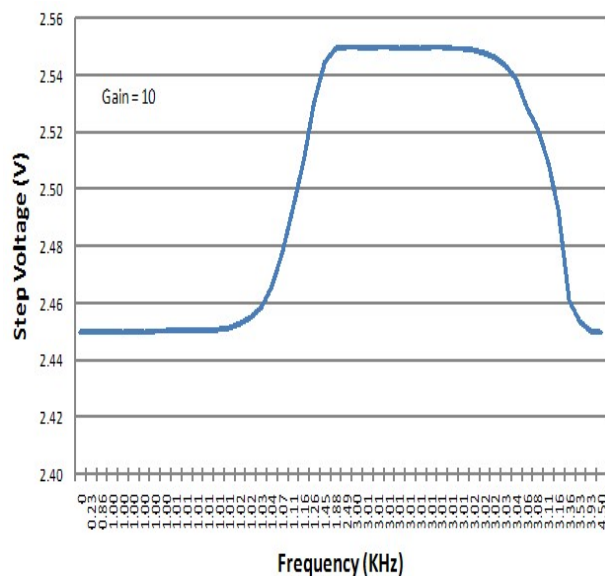


Figure 25. Small Signal Step Response

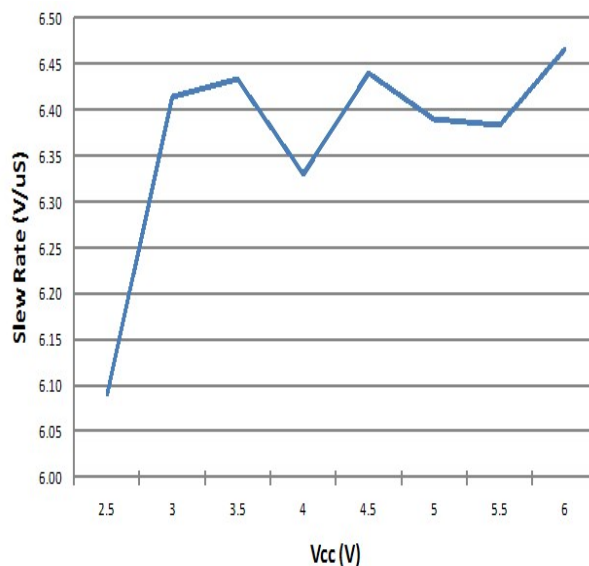


Figure 26. Slew Rate vs. Supply Voltage

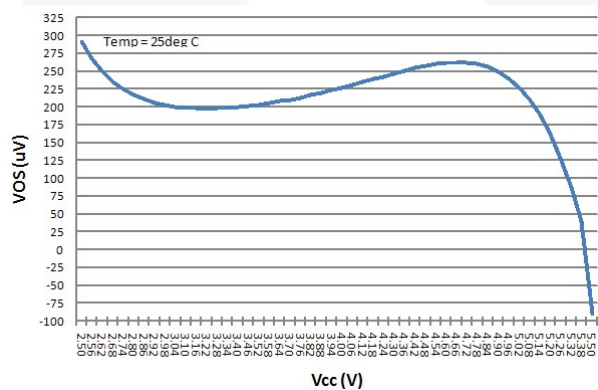


Figure 27.  $V_{OS}$  vs. Supply Voltage

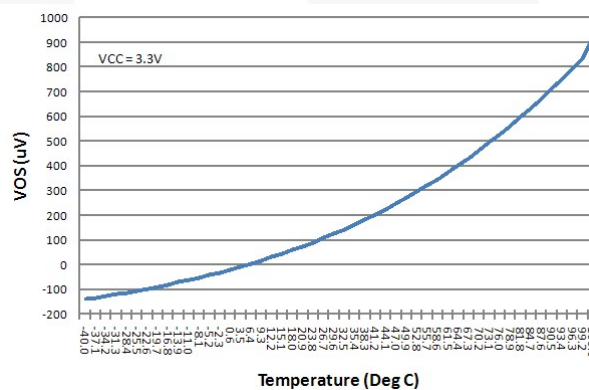


Figure 28.  $V_{OS}$  vs. Temperature

## Application Information

### General Description

The FAN4852 amplifier includes single-supply, general-purpose amplifiers, fabricated on a CMOS process. The input and output are rail-to-rail and the part is unity gain stable. The typical non-inverting circuit schematic is shown in Figure 29.

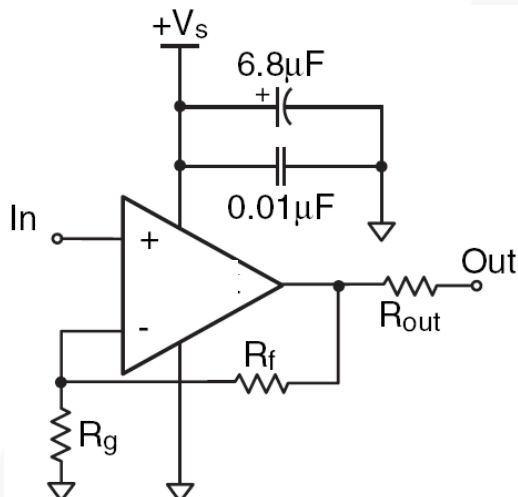


Figure 29. Typical Non-Inverting Configuration

### Input Common Mode Voltage

The common mode input range includes ground. CMRR does not degrade when input levels are kept 1.2V below the rail. For the best CMRR when using a  $V_s$  of 5V, the maximum input voltage should be 3.8V.

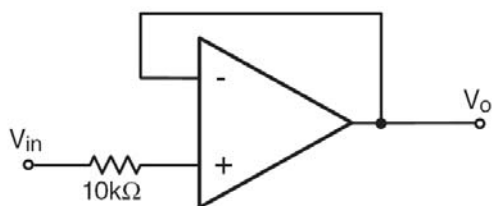


Figure 30. Circuit for Input Current Protection

### Power Dissipation

The maximum internal power dissipation allowed is directly related to the maximum junction temperature. If the maximum junction temperature exceeds 150°C, performance degradation occurs. If the maximum junction temperature exceeds 150°C for an extended time, device failure may occur.

### Overdrive Recovery

Overdrive of an amplifier occurs when the output and/or input ranges are exceeded. The recovery time varies based on whether the input or output is overdriven and by how much the range is exceeded. The FAN4852 typically recovers in less than 500ns from an overdrive condition. Figure 31 shows the FAN4852 amplifier in an overdriven condition.

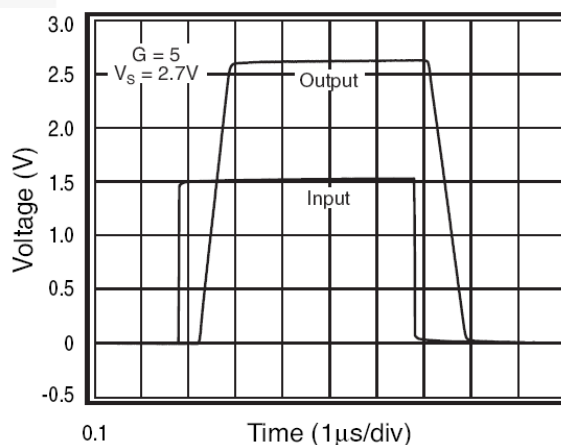


Figure 31. Overdrive Recovery

### Driving Capacitive Loads

Figure 31 illustrates the response of the amplifier. A small series resistance ( $R_s$ ) at the output, illustrated in Figure 32, improves stability and settling performance.  $R_s$  values provided achieve maximum bandwidth with less than 2dB of peaking. For maximum flatness, use a larger  $R_s$ . Capacitive loads larger than 500pF require the use of  $R_s$ .

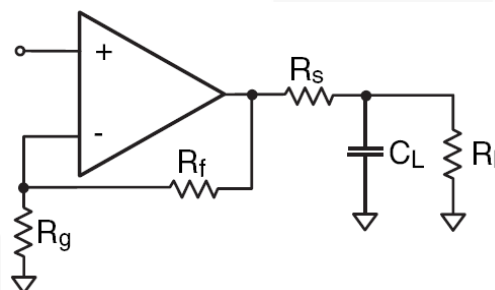


Figure 32. Typical Topology for Driving a Capacitive Load

Driving a capacitive load introduces phase-lag into the output signal, which reduces phase margin in the amplifier. The unity gain follower is the most sensitive configuration. In a unity gain follower configuration, the amplifier requires a 300Ω series resistor to drive a 100pF load.

## Layout Considerations

General layout and supply bypassing play major roles in high-frequency performance. Fairchild evaluation boards help guide high-frequency layout and aid in device testing and characterization. Follow the steps below as a basis for high-frequency layout:

1. Include 6.8 $\mu$ F and 0.01 $\mu$ F ceramic capacitors.
2. Place the 6.8 $\mu$ F capacitor within 0.75 inches of the power pin.
3. Place the 0.01 $\mu$ F capacitor within 0.1 inches of the power pin.
4. Remove the ground plane under and around the part, especially near the input and output pins, to reduce parasitic capacitance.

Minimize all trace lengths to reduce series inductances.

Refer to the evaluation board layouts shown in Figure 33 for more information.

When evaluating only one channel, complete the following on the unused channel:

1. Ground the non-inverting input.
2. Short the output to the inverting input.

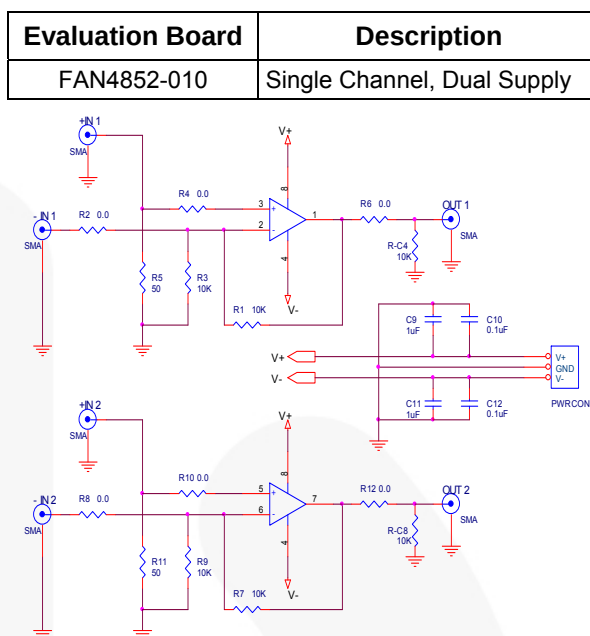


Figure 33. Evaluation Board Schematic

## Physical Dimensions

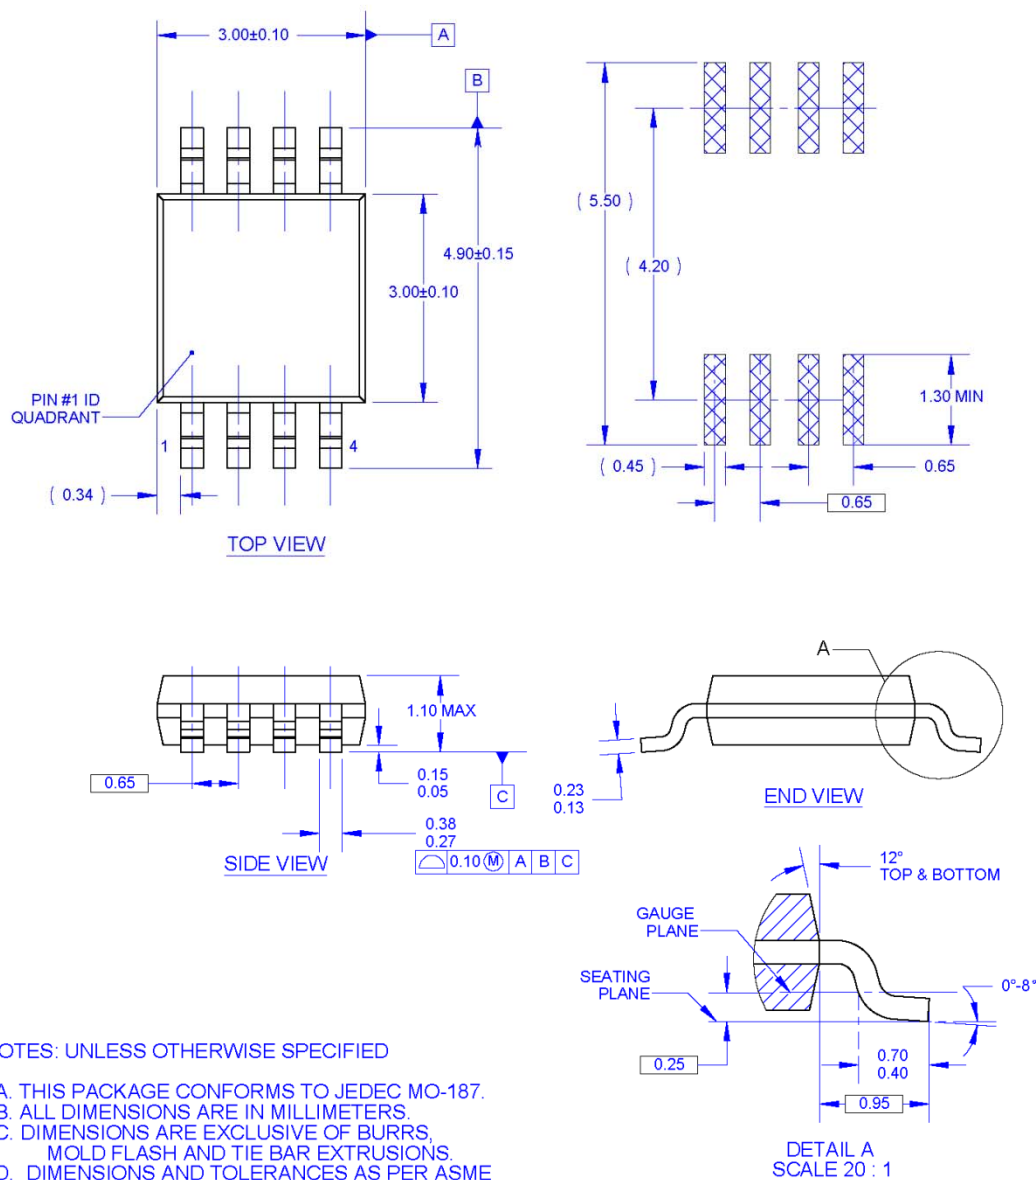


Figure 34. 8-Lead, Molded Small-Outline Package (MSOP)


Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/packaging/>.



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|                          |                                                                                   |                                                                                     |                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2Cool™                   | FlashWriter®*                                                                     | PDP-SPM™                                                                            | The Power Franchise®                                                                |
| AccuPower™               | FPS™                                                                              | Power-SPM™                                                                          | The Right Technology for Your Success™                                              |
| Auto-SPM™                | F-PFS™                                                                            | PowerTrench®                                                                        | <b>the power franchise</b>                                                          |
| AX-CAP™                  | FRFET®                                                                            | PowerXS™                                                                            | TinyBoost™                                                                          |
| BitSiC®                  | Global Power Resource™                                                            | Programmable Active Droop™                                                          | TinyBuck™                                                                           |
| Build it Now™            | Green FPS™                                                                        | QFET®                                                                               | TinyCalc™                                                                           |
| CorePLUS™                | Green FPS™ e-Series™                                                              | QST™                                                                                | TinyLogic®                                                                          |
| CorePOWER™               | Gmax™                                                                             | Quiet Series™                                                                       | TINYOPTO™                                                                           |
| CROSSVOLT™               | GTO™                                                                              | RapidConfigure™                                                                     | TinyPower™                                                                          |
| CTL™                     | IntelliMAX™                                                                       |  ™ | TinyPVM™                                                                            |
| Current Transfer Logic™  | ISOPANAR™                                                                         | Saving our world, 1mW/W/kW at a time™                                               | TinyWire™                                                                           |
| DEUXPEED®                | MegaBuck™                                                                         | SignalWise™                                                                         | TranSiC®                                                                            |
| Dual Cool™               | MICROCOUPLER™                                                                     | SmartMax™                                                                           | TriFault Detect™                                                                    |
| EcoSPARK®                | MicroFET™                                                                         | SMART START™                                                                        | TRUECURRENT®*                                                                       |
| EfficientMax™            | MicroPak™                                                                         | SPM®                                                                                | µSerDes™                                                                            |
| ESBC™                    | MicroPak2™                                                                        | STEALTH™                                                                            |  |
| <b>F</b> ®               | MillerDrive™                                                                      | SuperFET®                                                                           | UHC®                                                                                |
| Fairchild®               | MotionMax™                                                                        | SuperSOT™.3                                                                         | Ultra FRFET™                                                                        |
| Fairchild Semiconductor® | Motion-SPM™                                                                       | SuperSOT™.8                                                                         | UniFET™                                                                             |
| FACT Quiet Series™       | mV/Saver™                                                                         | SuperSOT™.8                                                                         | VCX™                                                                                |
| FACT®                    | OptoHiT™                                                                          | SupreMOS®                                                                           | VisualMax™                                                                          |
| FAST®                    | OPTOLOGIC®                                                                        | SyncFET™                                                                            | XS™                                                                                 |
| FastvCore™               | OPTOPLANAR®                                                                       | Sync-Lock™                                                                          |                                                                                     |
| FETBench™                |  |                                                                                     |                                                                                     |

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I55