40HF/40HFR

SILICON POWER DIODES

NSL **NAINA**

DO-5


FEATURES
- All Diffused Series
- Available in Normal & Reverse Polarity
- Industrial Grade
- Available In Avalanche Characteristic

* Available in metric and UNF thread

ELECTRICAL SPECIFICATIONS

$I_{F(AV)}$	Maximum Average Forward Current Te=140^{0}C	40A
V_{FM}	Maximum peak forward voltage drop @ Rated IF(AV)	1.2V
I_{FRM}	Maximum peak one cycle (non-rep) surge current 10 m sec	500 A
I_{FRM}	Maximum peak repetitive surge current	200 A
I^2t	Maximum I^2t rating (non-rep.) for 5 to 10 m sec	1200A^{2}Sec

40 HF/ HFR

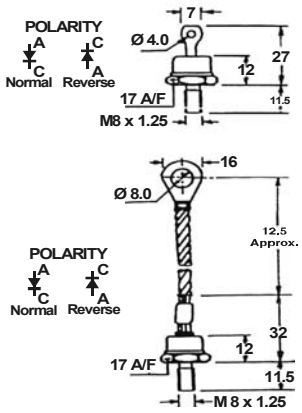

THERMAL MECHANICAL SPECIFICATIONS

θ_{JC}	Maximum thermal resistance Junction to case	1^{0}C/W
Tj	Operating Junction Temp.	-65^{0}C to 150^{0}C
T_{stg}	Storage temperature	-65^{0}C to 200^{0}C
	Mounting torque (Non-lubricated threads)	0.4 M-kg min, 0.6 M-kg max
W	Approx, weight	13.5 & 30 gms.

ELECTRICAL RATINGS

TYPE	40HF/HFR	10	20	40	60	80	100	120	140	160
V_{RRM}	Max. repetitive peak reverse	100	200	400	600	800	1000	1200	1400	1600
	voltage (v)									
$V_{R(RMS)}$	Max. R.M.S. reverse voltage (V)	70	140	280	420	560	700	840	980	1120
V_R	Max. D.C. Blocking Voltage (V)	100	200	400	600	800	1000	1200	1400	1600
	Recommended R.M.S. working Voltage(v)	40	80	160	240	320	400	480	560	640
$I_{R(AV)}$	Max. Average reverse leakage current @ VRMM Tc 25^{0}C uA	200	200	200	200	200	200	200	200	200

NAINA SEMICONDUCTOR LTD
D95,SECTOR 63,NOIDA(INDIA)
e-mail: sales@nainasemi.com, web site :www.nainasemi.com