



SAW Components

Data Sheet B7304





SAW Components

B7304

Low-Loss Filter for Mobile Communication

225,0 MHz

Data Sheet




Chip Sized SAW Package DCS8A

Features

- Low-loss IF filter for mobile telephone
- Channel selection in GSM, PCN, PCS systems
- Chip Sized SAW Package
- expansion coil for minimum insertion attenuation and optimum bandwidth adjustment

Terminals


- Gold-plated Ni



Dimensions in mm, approx. weight 0,05 g

Pin configuration

- | | |
|---------|-----------------|
| 1, 2 | Input balanced |
| 5, 6 | Output balanced |
| 3, 4, 7 | Ground |
| 8 | Expansion coil |



Type	Ordering code	Marking and Package according to	Packing according to
B7304	B39231-B7304-A910	C61157-A7-A65	F61074-V8102-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	- 25/+ 80	°C
Storage temperature range	T_{stg}	- 40/+ 85	°C
DC voltage	V_{DC}	3	V
Source power	P_s	10	dBm



SAW Components

B7304

Low-Loss Filter for Mobile Communication

225,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -25\text{ °C} \dots +80\text{ °C}$
 Terminating source impedance: $Z_S = 1000\ \Omega \parallel -1,2\ \text{pF}$
 Terminating load impedance: $Z_L = 1000\ \Omega \parallel -1,2\ \text{pF}$

		min.	typ.	max.	
Nominal frequency	f_N	—	225,00	—	MHz
Maximum insertion attenuation (Including losses in matching circuit)	α_{\max}	—	5,5	6,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
$f_N - 65.0\ \text{kHz} \dots f_N + 65.0\ \text{kHz}$		—	0,3	2,0	dB
$f_N - 70.0\ \text{kHz} \dots f_N + 70.0\ \text{kHz}$		—	0,4	3,0	dB
Group delay ripple (p-p)	$\Delta\tau$				
$f_N - 70.0\ \text{kHz} \dots f_N + 70.0\ \text{kHz}$		—	0,8	2,5	μs
Relative attenuation (relative to α_{\max})	α_{rel}				
$f_N - 25,00\ \text{MHz} \dots f_N - 3,00\ \text{MHz}$		45	66	—	dB
$f_N - 3,00\ \text{MHz} \dots f_N - 1,60\ \text{MHz}$		43	64	—	dB
$f_N - 1,60\ \text{MHz} \dots f_N - 0,60\ \text{MHz}$		38	49	—	dB
$f_N - 0,60\ \text{MHz} \dots f_N - 0,40\ \text{MHz}$		27	33	—	dB
$f_N - 0,40\ \text{MHz} \dots f_N - 0,23\ \text{MHz}$		8	16	—	dB
$f_N + 0,23\ \text{MHz} \dots f_N + 0,40\ \text{MHz}$		8	14	—	dB
$f_N + 0,40\ \text{MHz} \dots f_N + 0,60\ \text{MHz}$		27	30	—	dB
$f_N + 0,60\ \text{MHz} \dots f_N + 1,60\ \text{MHz}$		38	43	—	dB
$f_N + 1,60\ \text{MHz} \dots f_N + 3,00\ \text{MHz}$		43	60	—	dB
$f_N + 3,00\ \text{MHz} \dots f_N + 25,00\ \text{MHz}$		45	53	—	dB
Impedance within pass band					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1000 \parallel 1,2	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1000 \parallel 1,2	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency ¹⁾	TC_f	—	-0,039	—	ppm/K ²
Frequency inversion point	T_0	—	25	—	°C

¹⁾ Temperature dependence of f_c : $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$



SAW Components

B7304


Low-Loss Filter for Mobile Communication

225,0 MHz

Data Sheet




Test matching network to 50Ω, low pass example (actual element values depend on PCB layout. S-parameters of transformers TOKO B5FL available on request):

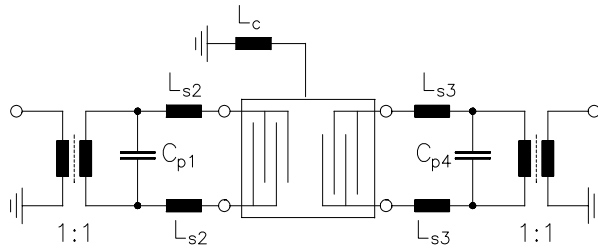


$$\begin{aligned} L_c &= 82 \text{ nH} \parallel 1,8 \text{ pF} \\ C_{p1} &= C_{p4} = 2,2 \text{ pF} \\ L_{s2} &= L_{s3} = 39 \text{ nH} \end{aligned}$$



Transfer function (pass band):

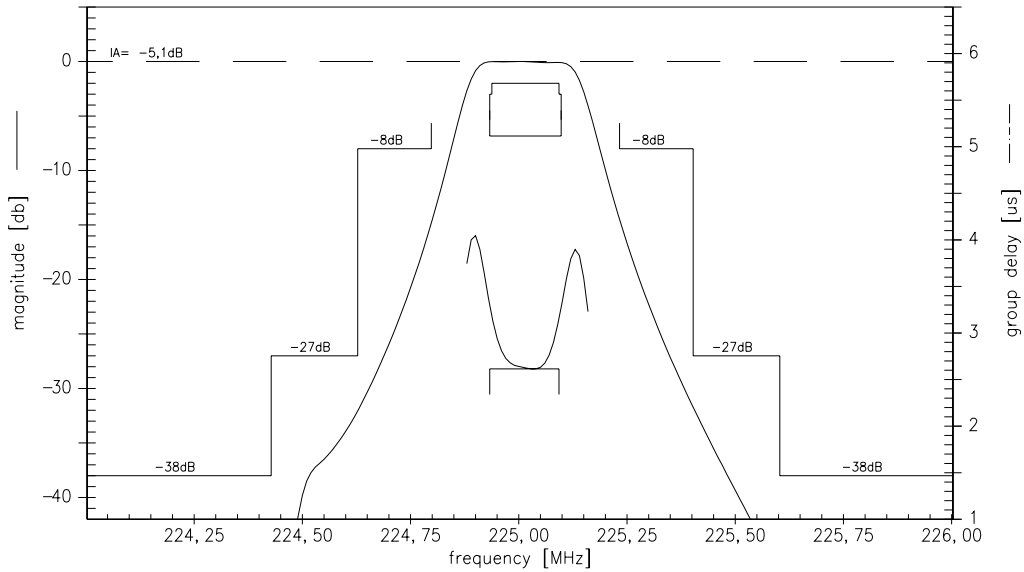

Transfer function (wide band):

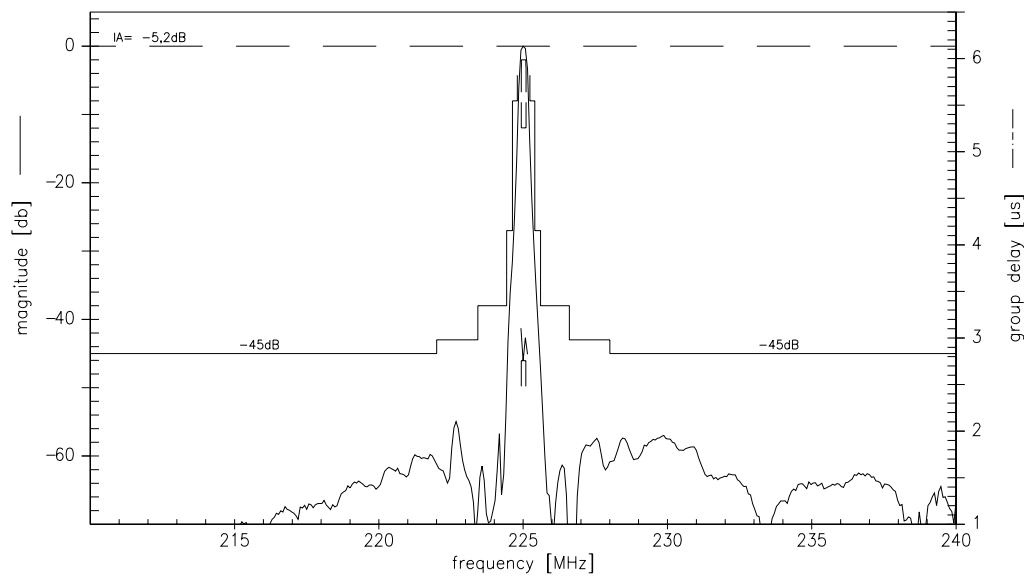



SAW Components

B7304

Low-Loss Filter for Mobile Communication

225,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.