
This document was generated on 07/08/2014

# PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** 22-28-4026
**Status:** Active
**Overview:** KK® Interconnect System - Molex
**Description:** KK® 254 Breakaway Header, Vertical, 2 Circuits, 0.76µm Gold (Au) Selective Plating, Mating Pin Length 6.09mm

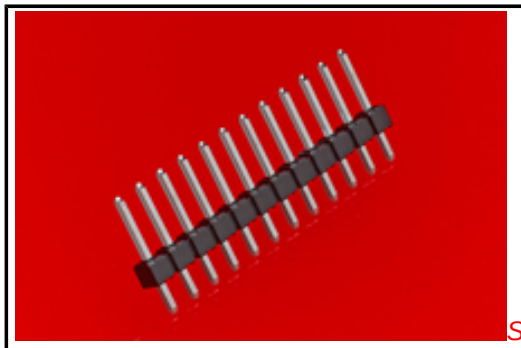

*Series image - Reference only*

**Documents:**

- 3D Model
- Drawing (PDF)
- Product Specification PS-10-07 (PDF)
- RoHS Certificate of Compliance (PDF)

## Agency Certification

| | |
|---|---|
| CSA | LR19980 |
| UL | E29179 |

## General

| | |
|---|---|
| Product Family | PCB Headers |
| Series | 42375 |
| Application | Board-to-Board, Signal, Wire-to-Board |
| Overview | KK® Interconnect System - Molex |
| Product Name | KK® 254 |
| UPC | 800754251594 |

## Physical

| | |
|---|---|
| Breakaway | Yes |
| Circuits (Loaded) | 2 |
| Circuits (maximum) | 2 |
| Color - Resin | Black |
| Durability (mating cycles max) | 100 |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Compliant | No |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | None |
| Material - Metal | Brass |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 0.133/g |
| Number of Rows | 1 |
| Orientation | Vertical |
| PC Tail Length | 3.18mm |
| PCB Locator | No |
| PCB Retention | None |
| PCB Thickness - Recommended | 1.60mm |
| Packaging Type | Bag |
| Pitch - Mating Interface | 2.54mm |
| Plating min - Mating | 0.762µm |
| Plating min - Termination | 2.540µm |
| Polarized to Mating Part | No |
| Polarized to PCB | No |
| Shrouded | No |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |
| Temperature Range - Operating | See Product Specification |
| Termination Interface: Style | Through Hole |

**EU RoHS**
**ELV and RoHS Compliant**
**REACH SVHC**
**Contains SVHC: No**
**Low-Halogen Status**
**Not Low-Halogen**

**China RoHS**

**Need more information on product environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

**Search Parts in this Series**
42375Series

**Mates With**
KK® Crimp Housing 2695 , 6471 , 7880 ,
KK® PC Board Connector 4455

## Electrical

| | |
|---|---|
| Current - Maximum per Contact | 4A |
| Voltage - Maximum | 250V |

## Solder Process Data

| | |
|---|---|
| Duration at Max. Process Temperature (seconds) | 5 |
| Lead-free Process Capability | Wave Capable (TH only) |
| Max. Cycles at Max. Process Temperature | 1 |
| Process Temperature max. C | 260 |

## Material Info

| | |
|---|---|
| Old Part Number | 42375-0072 |

## Reference - Drawing Numbers

| | |
|---|---|
| Product Specification | PS-10-07 |
| Sales Drawing | SD-42375-001 |

This document was generated on 07/08/2014

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**