

Pomona®

Model 4280 and 4280N WE=310 (PJ-051) To Bantam Miniature Phone Plug

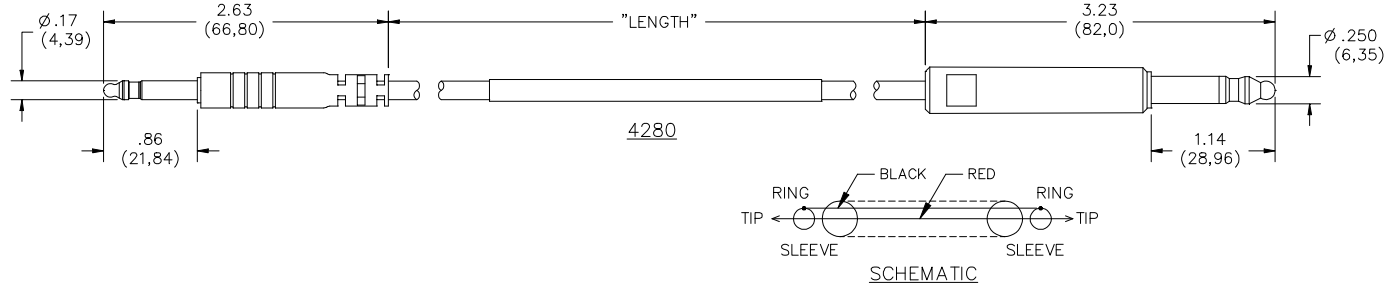

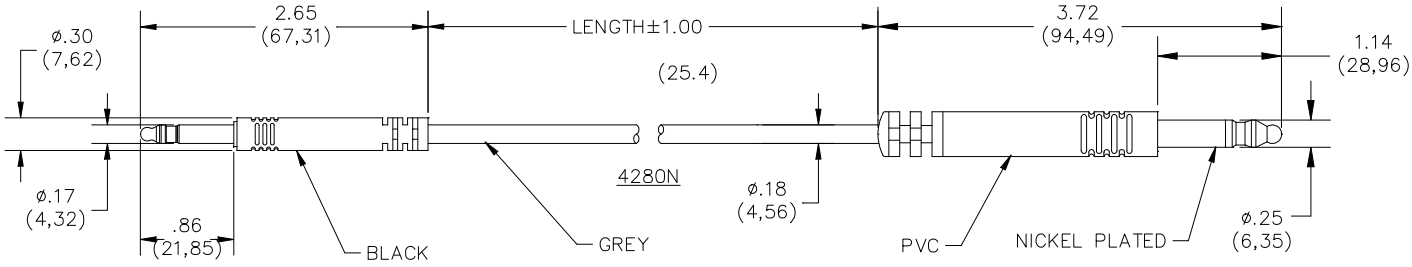

FEATURES:

- Shielded cable to reduce noise
- WE-310 and Bantam Plugs molded to the cable for optimum durability

MATERIALS:

Plugs – (4280) Brass, unplated
(4280N) Brass, nickel plated
Cable – 2 Conductor shielded twisted pair, PVC jacket and insulation

RATINGS:

Operating Voltage: 300 VRMS Max.
Operating Temperature: +50°C to (+122°F) Max.
Current: 3.36 Amperes @ 25°C
Nominal Capacitance Shield Conductors: 720pf
Nominal Capacitance Between Conductors: 420pf

ORDERING INFORMATION: XX = Length in inches
Model 4280-XX Standard Lengths 48" (1219 mm), 60" (1520 mm)
4280N-XX Standard Lengths 36" (914 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 425-446-5844
Technical Support: technicalsupport@pomonatest.com

www.pomonaelectronics.com