

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A

Voltage rating: 250 VAC

Current rating: 15 A

Voltage rating: 250 VAC

**ORDERING CODE:**42R01-2 $\frac{2}{1}$ $\frac{2}{3}$

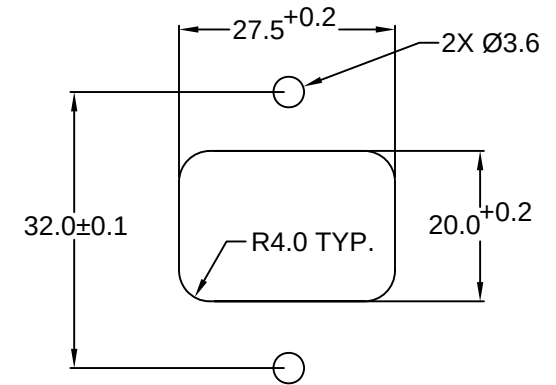
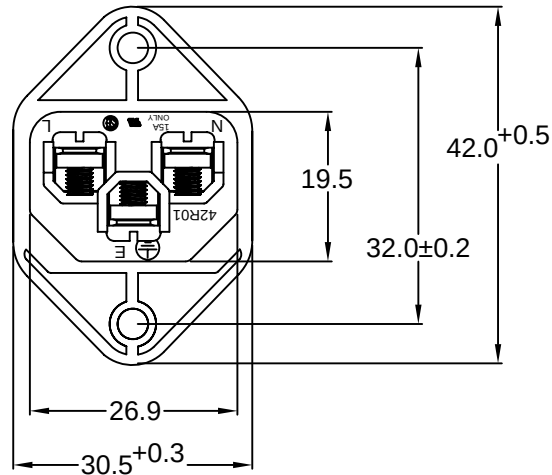
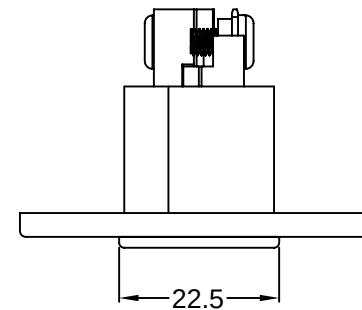
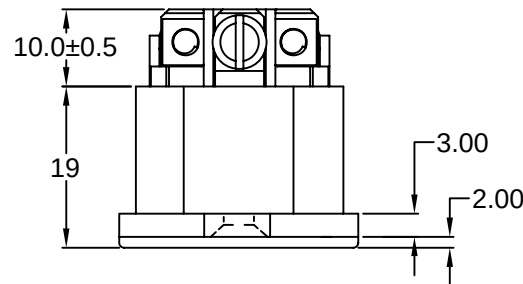
1 = COLOR

1 = BLACK

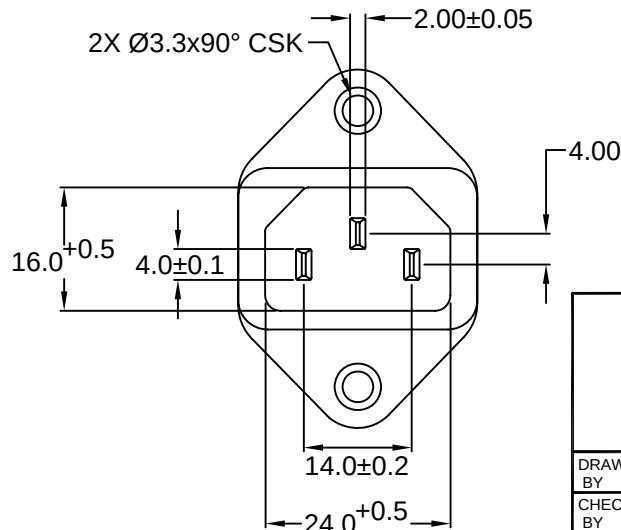
2 = GRAY

2 = M3x6.0mm

SCREW TERMINALS

3 = ELECTRICAL CIRCUIT
CONFIGURATION1 = 15A 250V 120°C
2+GROUND2 = 15A 250V 70°C
2+GROUND4 = 15A 250V 70°C
2 POLERECOMMENDED
PANEL CUTOUT

2X Ø3.3x90° CSK

RoHS
COMPLIANT

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C14 APPL. INLET; SCREW
TERMINALS; CROSS FLANGE

DRAWN BY	GQ	DATE:	08/07/01
CHECK BY	TD	DATE:	08/14/01
APPR BY	PB	DATE:	08/14/01

PART #: 42R01-2X2X

SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

REV	DATE	CHANGE	CHK	CHK	APPR