
93S43

4-BIT BY 2-BIT TWOS COMPLEMENT MULTIPLIER


DESCRIPTION — The '43 is a high speed twos complement multiplier. The device is a 4-bit by 2-bit building block that can be connected in an iterative array to perform multiplication of two binary numbers of variable lengths. The device can generate the twos complement product, without correction, of two binary numbers presented in twos complement notation.

- **VERY HIGH SPEED MULTIPLICATION — TWO 12-BIT NUMBERS IN 125 ns (TYP)**
- **PROVIDES TWOS COMPLEMENT PRODUCT WITHOUT CORRECTION**
- **EXPANDS TO ANY SIZE ARRAY WITHOUT ADDITIONAL COMPONENTS**
- **ACCEPTS ACTIVE HIGH OR ACTIVE LOW OPERANDS**
- **EASILY CORRECTABLE FOR UNSIGNED, SIGN-MAGNITUDE OR ONES COMPLEMENT MULTIPLICATION**

CONNECTION DIAGRAM
PINOUT A



LOGIC SYMBOL

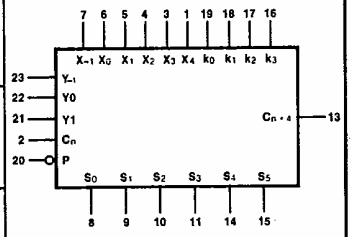

VCC = Pin 24
GND = Pin 12

ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE VCC = +5.0 V ±5%, TA = 0°C to +70°C	MILITARY GRADE VCC = +5.0 V ±10%, TA = -55°C to +125°C	PKG TYPE
Plastic DIP (P)	A	93S43PC		9N
Ceramic DIP (D)	A	93S43DC	93S43DM	6N
Flatpak (F)	A	93S43FC	93S43FM	4M

INPUT LOADING/FAN-OUT: See Section 3 for U.L. definitions


PIN NAMES	DESCRIPTION	93S (U.L.) HIGH/LOW
X_{-1}, X_3, X_4	Multiplicand Inputs	1.0/1.0
X_0, X_1, X_2	Multiplicand Inputs	2.0/2.0
Y_0	Multiplier Input	2.0/2.0
y_{-1}, y_1	Multiplier Inputs	1.0/1.0
k_0 — k_3	Constant Inputs	2.0/2.0
C_n	Carry Input	1.0/1.0
$\overline{P}$	Polarity Control Input (Active LOW for HIGH Operands)	3.0/3.0
S_0 — S_5	Product Outputs	25/12.5
C_{n+4}	Carry Output	25/12.5

FUNCTIONAL DESCRIPTION — The '43 is a super fast hardware multiplier employing Schottky technology and twos complement arithmetic. It multiplies a multiplicand of four bits by a multiplier of two bits and forms a basic iterative logic cell. It can also multiply in active HIGH (positive logic) or active LOW (negative logic) representations by reinterpreting the active levels of the inputs, outputs and the Polarity Control ($\overline{P}$). The binary number with 1 as the most significant bit is treated as a negative number represented in twos complement form. These '43 iterative logic cells can be connected to implement multiplication of an X-bit number by a Y-bit number. This application requires X • Y ÷ 4 • 2 packages and the resulting product has X + Y bits. At the beginning of the array, a constant can be presented at the K inputs that will be added to the least significant part of the product. The packages can be connected in parallel, triangular or split-array scheme depending on the speed requirement. The '41 ALU can be used with these multipliers in the split-array scheme to obtain high speed multiplication.

TABLE I SWITCHING TEST CONDITIONS

INPUT	OUTPUTS	INPUTS AT 0 V (Remaining Inputs at 4.5 V)
C_n	C_{n+4}, S_0 — S_3, S_4, S_5	$\overline{P}$, y_{-1}, y_1, All x
k_0	C_{n+4}, S_0 — S_3, S_4, S_5	$\overline{P}$, y_{-1}, y_1, All x
k_1	C_{n+4}, S_1 — S_3, S_4, S_5	$\overline{P}$, y_{-1}, y_1, All x
k_2	C_{n+4}, S_2, S_3, S_4, S_5	$\overline{P}$, y_{-1}, y_1, All x
k_3	S_3	$\overline{P}$, y_{-1}, y_1, All x
k_3	S_4, S_5	$\overline{P}$, y_{-1}, y_1, All x, C_n
x_{-1}	C_{n+4}, S_0 — S_3, S_4, S_5	$\overline{P}$, y_1, All k
x_0	C_{n+4}, S_0 — S_3, S_4, S_5	$\overline{P}$, y_{-1}, y_1, All k
x_1	C_{n+4}, S_1 — S_3, S_4, S_5	$\overline{P}$, y_{-1}, y_1, All k
x_2	C_{n+4}, S_2, S_3, S_4, S_5	$\overline{P}$, y_{-1}, y_1, All k
x_3, x_4	S_3	$\overline{P}$, y_{-1}, y_1, All k
x_3, x_4	S_4, S_5	$\overline{P}$, y_{-1}, y_1, All k, C_n
x_3, x_4	S_4, S_5	$\overline{P}$, y_{-1}, All k, C_n
y_{-1}	C_{n+4}, S_0 — S_3, S_4, S_5	$\overline{P}$, x_1, x_2, x_3, x_4, All k
y_0	C_{n+4}, S_0 — S_3, S_4, S_5	$\overline{P}$, x_1, x_2, x_3, x_4, All k
y_1	C_{n+4}, S_0 — S_3, S_4, S_5	x_0, x_1, x_2, x_3, x_4, All k

LOGIC DIAGRAM

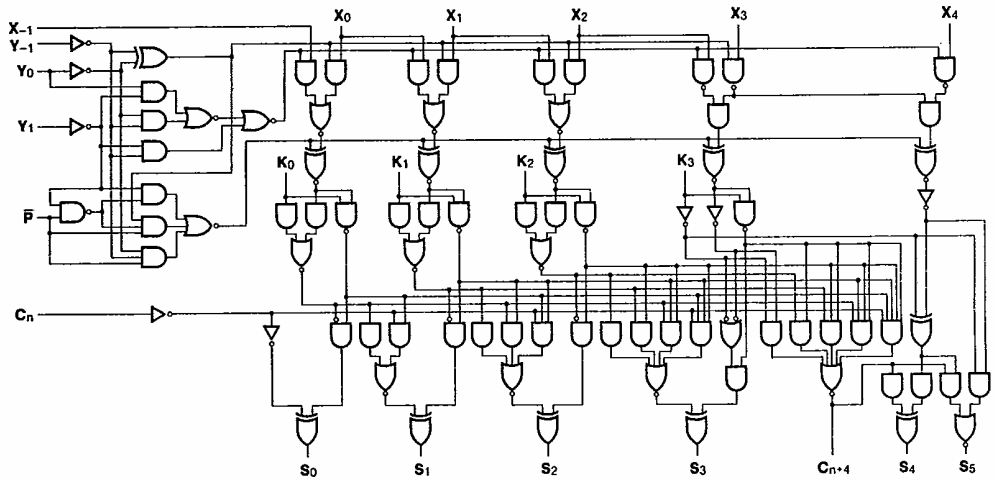

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

SYMBOL	PARAMETER	93S		UNITS	CONDITIONS
		Min	Max		
I_{CC}	Power Supply Current		149	mA	V_{CC} = Max

AC CHARACTERISTICS: V_{CC} = +5.0 V, T_A = +25° C (See Section 3 for waveforms and load configurations)

SYMBOL	PARAMETER	93S C_L = 15 pF		UNITS	CONDITIONS
		Min	Max		
t_{PLH} t_{PHL}	Propagation Delay C_n to C_{n+4}		9.0 9.0	ns	Figs. 3-1, 3-5
t_{PLH} t_{PHL}	Propagation Delay C_n to $S_0 - S_3$		13 11	ns	Figs. 3-1, 3-4
t_{PLH} t_{PHL}	Propagation Delay C_n to S_4, S_5		16 15	ns	Figs. 3-1, 3'4
t_{PLH} t_{PHL}	Propagation Delay k_n to C_{n+4}		12 13	ns	Figs. 3-1, 3-5
t_{PLH} t_{PHL}	Propagation Delay k_n to $S_0 - S_3$		14 12	ns	Figs. 3-1, 3-5
t_{PLH} t_{PHL}	Propagation Delay k_n to S_4, S_5		19 17	ns	Figs. 3-1, 3-4
t_{PLH} t_{PHL}	Propagation Delay x_n to C_{n+4}		15 24	ns	Figs. 3-1, 3-5
t_{PLH} t_{PHL}	Propagation Delay x_n to $S_0 - S_3$		25 25	ns	Figs. 3-1, 3-4
t_{PLH} t_{PHL}	Propagation Delay x_n to S_4, S_5		30 21	ns	Figs. 3-1, 3-4
t_{PLH} t_{PHL}	Propagation Delay y_n to C_{n+4}		25 27	ns	Figs. 3-1, 3-5
t_{PLH} t_{PHL}	Propagation Delay y_n to $S_0 - S_3$		28 27	ns	Figs. 3-1, 3-4
t_{PLH} t_{PHL}	Propagation Delay y_n to S_4, S_5		32 30	ns	Figs. 3-1, 3-4