

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A

Voltage rating: 250 VAC

Current rating: 15 A

Voltage rating: 250 VAC

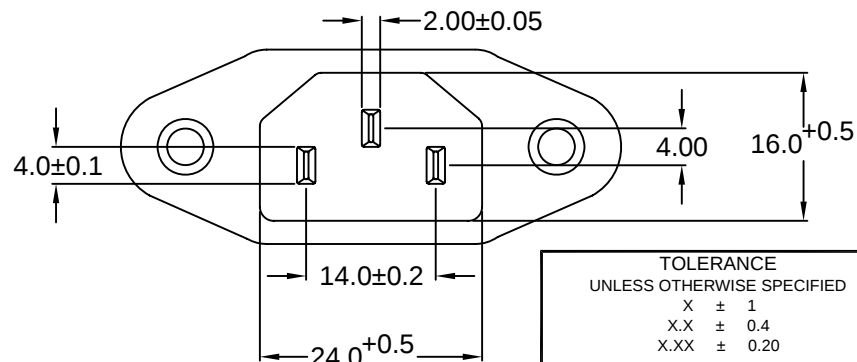

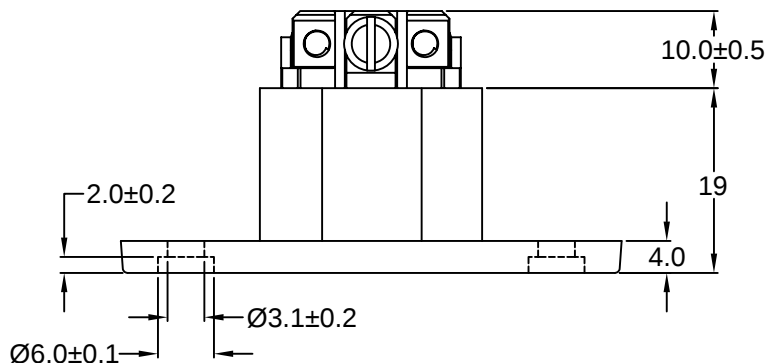
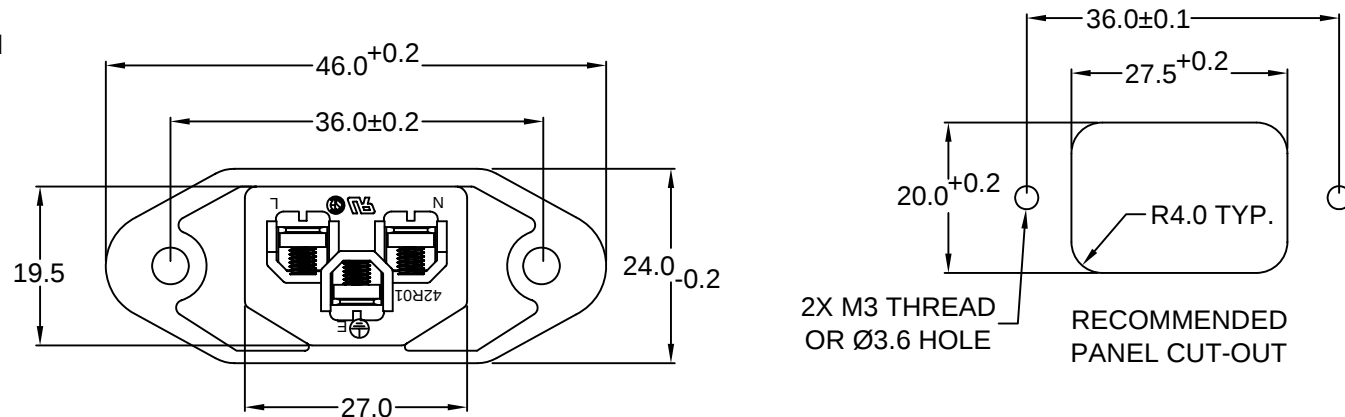
**ORDERING CODE:**42R01-7 $\frac{2}{1}$ $\frac{2}{3}$ **1 = COLOR**

1 = BLACK

2 = GRAY

2 = M3x6.0mm

SCREW TERMINALS

3 = ELECTRICAL CIRCUIT CONFIGURATION1 = 15A 250V 120°C
2+GROUND2 = 15A 250V 70°C
2+GROUND4 = 15A 250V 70°C
2 POLERoHS
COMPLIANT

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C14 APPL. INLET; SCREW
TERMINALS; SIDE FLANGE

DRAWN BY GQ DATE: 08/13/01

CHECK BY TD DATE: 08/14/01

APPR BY PB DATE: 08/14/01

PART #: 42R01-7X2X

SHEET
1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHNG CHECK APPR

CHANGE

DATE

REV

6

5

4

3

2

1