

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated
 Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A

Voltage rating: 250 VAC

Current rating: 15 A

Voltage rating: 250 VAC

**ORDERING CODE:**

42R03-2 $\frac{2}{1} \frac{2}{2}$

1) COLOR

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION



1 = 15A 250V 120°C
 2+GROUND






2 = 15A 250V 70°C
 2+GROUND



4 = 15A 250V 70°C
 2 POLE

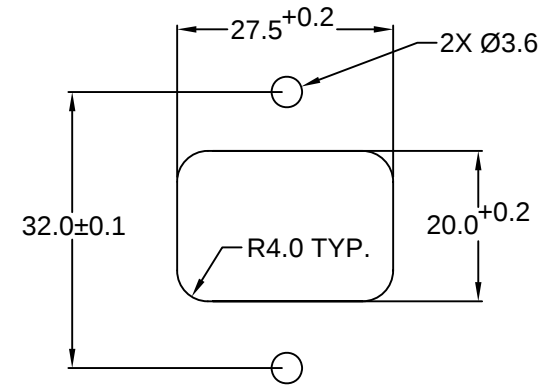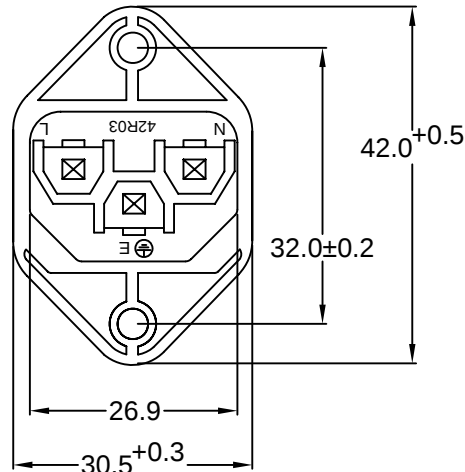

RECOMMENDED
 PANEL CUTOUT

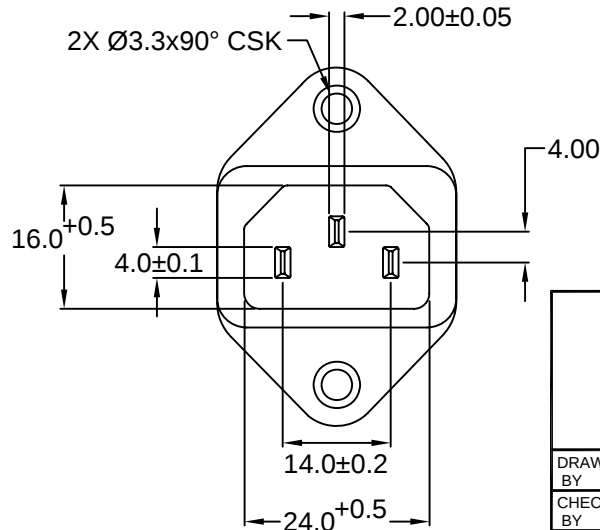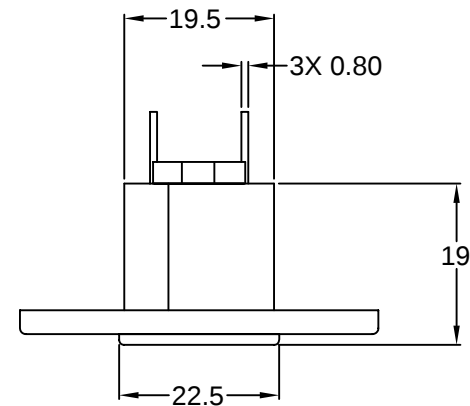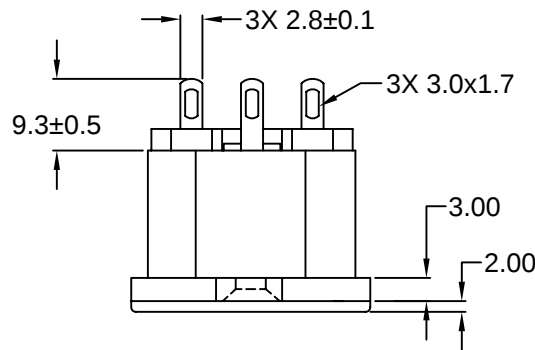

**RoHS
 COMPLIANT**

TOLERANCE
 UNLESS OTHERWISE SPECIFIED
 X ± 1
 X.X ± 0.4
 X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C14 APPL. INLET; SOLDER
 TERMINALS; CROSS FLANGE

DRAWN BY GQ DATE: 08/16/01
 CHECK BY TD DATE: 08/20/01
 APPR BY PB DATE: 08/21/01

PART #: **42R03-2X2X**

SHEET
 1 of 1

SIZE: A
 SCALE: NTS
 ALL DIMENSIONS FOR REFERENCE ONLY
 DIMENSIONS ARE IN MILLIMETERS

REV: A

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
A	1/8/10	TERM. DIM.	PB		