

## 700MHz Differential Twisted-Pair Drivers

The EL5178 and EL5378 are single and triple high bandwidth amplifiers with an output in differential form. They are primarily targeted for applications such as driving twisted-pair lines in component video applications. The inputs can be in either single-ended or differential form but the outputs are always in differential form.



On the EL5178 and EL5378, two feedback inputs provide the user with the ability to set the gain of each device (stable at minimum gain of 2).

The output common mode level for each channel is set by the associated REF pin, which have a -3dB bandwidth of over 110MHz. Generally, these pins are grounded but can be tied to any voltage reference.

All outputs are short circuit protected to withstand temporary overload condition.

The EL5178 is available in 8 Ld MSOP and SOIC packages and EL5378 is available in a 28 Ld QSOP package. All are specified for operation over the full -40°C to +85°C temperature range.

## Pinouts

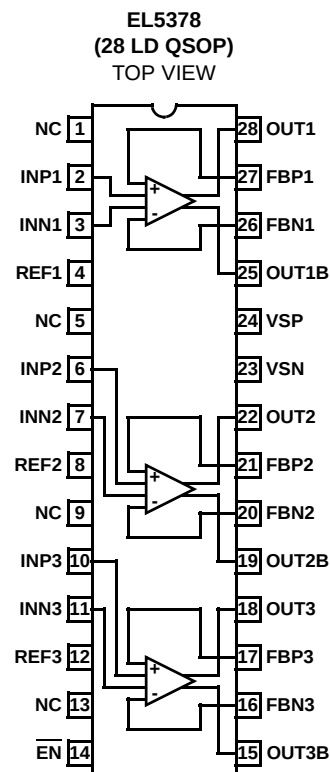

## Features

- Fully differential inputs, outputs, and feedback
- Differential input range  $\pm 2.3V$
- 700MHz 3dB bandwidth
- 1000V/ $\mu s$  slew rate
- Low distortion at 5MHz and 20MHz
- Single 5V or dual  $\pm 5V$  supplies
- 60mA maximum output current
- Low power - 12.5mA per channel
- Pb-Free plus anneal available (RoHS compliant)

## Applications

- Twisted-pair driver
- Differential line driver
- VGA over twisted-pair
- ADSL/HDSL driver
- Single ended to differential amplification
- Transmission of analog signals in a noisy environment

**Ordering Information**

| PART NUMBER          | PART MARKING | TAPE & REEL | PACKAGE                        | PKG. DWG. # |
|----------------------|--------------|-------------|--------------------------------|-------------|
| EL5178IS             | 5178IS       | -           | 8 Ld SOIC (150 mil)            | MDP0027     |
| EL5178IS-T7          | 5178IS       | 7"          | 8 Ld SOIC (150 mil)            | MDP0027     |
| EL5178IS-T13         | 5178IS       | 13"         | 8 Ld SOIC (150 mil)            | MDP0027     |
| EL5178ISZ (Note)     | 5178ISZ      | -           | 8 Ld SOIC (150 mil) (Pb-Free)  | MDP0027     |
| EL5178ISZ-T7 (Note)  | 5178ISZ      | 7"          | 8 Ld SOIC (150 mil) (Pb-Free)  | MDP0027     |
| EL5178ISZ-T13 (Note) | 5178ISZ      | 13"         | 8 Ld SOIC (150 mil) (Pb-Free)  | MDP0027     |
| EL5178IY             | BBGAA        | -           | 8 Ld MSOP (3.0mm)              | MDP0043     |
| EL5178IY-T7          | BBGAA        | 7"          | 8 Ld MSOP (3.0mm)              | MDP0043     |
| EL5178IY-T13         | BBGAA        | 13"         | 8 Ld MSOP (3.0mm)              | MDP0043     |
| EL5178IYZ (Note)     | BBHAA        | -           | 8 Ld MSOP (3.0mm) (Pb-Free)    | MDP0043     |
| EL5178IYZ-T7 (Note)  | BBHAA        | 7"          | 8 Ld MSOP (3.0mm) (Pb-Free)    | MDP0043     |
| EL5178IYZ-T13 (Note) | BBHAA        | 13"         | 8 Ld MSOP (3.0mm) (Pb-Free)    | MDP0043     |
| EL5378IU             | EL5378IU     | -           | 28 Ld QSOP (150 mil)           | MDP0040     |
| EL5378IU-T7          | EL5378IU     | 7"          | 28 Ld QSOP (150 mil)           | MDP0040     |
| EL5378IU-T13         | EL5378IU     | 13"         | 28 Ld QSOP (150 mil)           | MDP0040     |
| EL5378IUZ (Note)     | EL5378IUZ    | -           | 28 Ld QSOP (150 mil) (Pb-Free) | MDP0040     |
| EL5378IUZ-T7 (Note)  | EL5378IUZ    | 7"          | 28 Ld QSOP (150 mil) (Pb-Free) | MDP0040     |
| EL5378IUZ-T13 (Note) | EL5378IUZ    | 13"         | 28 Ld QSOP (150 mil) (Pb-Free) | MDP0040     |

NOTE: Intersil Pb-free plus anneal products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

## Absolute Maximum Ratings (T<sub>A</sub> = +25°C)

|                                                      |       |
|------------------------------------------------------|-------|
| Supply Voltage (V <sub>S+</sub> to V <sub>S-</sub> ) | 12V   |
| Maximum Output Current                               | ±60mA |
| Input Current (all inputs and references)            | 4mA   |
| ESD Rating                                           |       |
| Human Body Model                                     | 3kV   |
| Machine Model                                        | 300V  |

## Thermal Information

|                                |                                                                                                                 |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Storage Temperature Range      | -65°C to +150°C                                                                                                 |
| Operating Junction Temperature | +135°C                                                                                                          |
| Ambient Operating Temperature  | -40°C to +85°C                                                                                                  |
| Pb-free reflow profile         | see link below                                                                                                  |
|                                | <a href="http://www.intersil.com/pbfree/Pb-FreeReflow.asp">http://www.intersil.com/pbfree/Pb-FreeReflow.asp</a> |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

IMPORTANT NOTE: All parameters having Min/Max specifications are guaranteed. Typ values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: T<sub>J</sub> = T<sub>C</sub> = T<sub>A</sub>

## Electrical Specifications V<sub>S+</sub> = +5V, V<sub>S-</sub> = -5V, T<sub>A</sub> = +25°C, V<sub>IN</sub> = 0V, R<sub>LD</sub> = 1kΩ, C<sub>LD</sub> = 2.7pF, [R<sub>F</sub> = 604Ω, R<sub>G</sub> = 402Ω (EL5178)], [R<sub>F</sub> = 402Ω, R<sub>G</sub> = 274Ω (EL5378)], unless otherwise specified.

| PARAMETER                    | DESCRIPTION                                               | CONDITIONS                                                          | MIN  | TYP  | MAX | UNIT   |
|------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------|------|------|-----|--------|
| <b>AC PERFORMANCE</b>        |                                                           |                                                                     |      |      |     |        |
| BW                           | -3dB Bandwidth                                            | A <sub>V</sub> = 2, C <sub>LD</sub> = 2.7pF                         |      | 700  |     | MHz    |
|                              |                                                           | A <sub>V</sub> = 5, C <sub>LD</sub> = 2.7pF                         |      | 80   |     | MHz    |
|                              |                                                           | A <sub>V</sub> = 2, C <sub>LD</sub> = 2.7pF, R <sub>LD</sub> = 200Ω |      | 320  |     | MHz    |
| BW                           | ±0.1dB Bandwidth                                          | A <sub>V</sub> = 2, C <sub>LD</sub> = 2.7pF                         |      | 45   |     | MHz    |
| SR                           | Slew Rate, Differential (EL5178)                          | V <sub>OUT</sub> = 3V <sub>P-P</sub> , 20% to 80%                   | 650  | 850  |     | V/μs   |
|                              | Slew Rate, Differential (EL5378)                          | V <sub>OUT</sub> = 3V <sub>P-P</sub> , 20% to 80%                   | 650  | 1000 |     | V/μs   |
| T <sub>STL</sub>             | Settling Time to 0.1%                                     | V <sub>OUT</sub> = 2V <sub>P-P</sub>                                |      | 35   |     | ns     |
| T <sub>OVR</sub>             | Output Overdrive Recovery Time                            | A <sub>V</sub> = 2                                                  |      | 20   |     | ns     |
| GBWP                         | Gain Bandwidth Product                                    |                                                                     |      | 350  |     | MHz    |
| V <sub>REF</sub> BW (-3dB)   | V <sub>REF</sub> -3dB Bandwidth (EL5378)                  | C <sub>LD</sub> = 2.7pF                                             |      | 110  |     | MHz    |
| V <sub>REF</sub> SR+         | V <sub>REF</sub> Slew Rate - Rise (EL5378)                | V <sub>OUT</sub> = 2V <sub>P-P</sub> , 20% to 80%                   |      | 134  |     | V/μs   |
| V <sub>REF</sub> SR-         | V <sub>REF</sub> Slew Rate - Fall (EL5378)                | V <sub>OUT</sub> = 2V <sub>P-P</sub> , 20% to 80%                   |      | 70   |     | V/μs   |
| V <sub>N</sub>               | Input Voltage Noise                                       | at 10kHz                                                            |      | 18   |     | nV/√Hz |
| I <sub>N</sub>               | Input Current Noise                                       | at 10kHz                                                            |      | 1.5  |     | pA/√Hz |
| HD2                          | Second Harmonic Distortion                                | V <sub>OUT</sub> = 2V <sub>P-P</sub> , 5MHz                         |      | -83  |     | dBc    |
|                              |                                                           | V <sub>OUT</sub> = 2V <sub>P-P</sub> , 20MHz                        |      | -72  |     | dBc    |
| HD3                          | Third Harmonic Distortion                                 | V <sub>OUT</sub> = 2V <sub>P-P</sub> , 5MHz                         |      | -88  |     | dBc    |
|                              |                                                           | V <sub>OUT</sub> = 2V <sub>P-P</sub> , 20MHz                        |      | -70  |     | dBc    |
| dG                           | Differential Gain at 3.58MHz                              | R <sub>LD</sub> = 300Ω, A <sub>V</sub> = 2                          |      | 0.06 |     | %      |
| dθ                           | Differential Phase at 3.58MHz                             | R <sub>LD</sub> = 300Ω, A <sub>V</sub> = 2                          |      | 0.13 |     | °      |
| e <sub>S</sub>               | Channel Separation (EL5378)                               | at F = 1MHz                                                         |      | 90   |     | dB     |
| <b>INPUT CHARACTERISTICS</b> |                                                           |                                                                     |      |      |     |        |
| V <sub>OS</sub>              | Input Referred Offset Voltage                             |                                                                     |      | ±1.9 | ±30 | mV     |
| I <sub>IN</sub>              | Input Bias Current (V <sub>IN+</sub> , V <sub>IN-</sub> ) |                                                                     | -20  | -14  | -7  | μA     |
| I <sub>REF</sub>             | Input Bias Current (V <sub>REF</sub> ) (EL5378)           | V <sub>REF</sub> = ±3.0V                                            | 0.05 | 2.3  | 4   | μA     |
| R <sub>IN</sub>              | Differential Input Resistance                             |                                                                     |      | 150  |     | kΩ     |
| C <sub>IN</sub>              | Differential Input Capacitance                            |                                                                     |      | 1    |     | pF     |
| DMIR                         | Differential Mode Input Range (EL5378)                    |                                                                     |      | ±2.3 |     | V      |

## EL5178, EL5378

**Electrical Specifications**  $V_{S+} = +5V$ ,  $V_{S-} = -5V$ ,  $T_A = +25^{\circ}C$ ,  $V_{IN} = 0V$ ,  $R_{LD} = 1k\Omega$ ,  $C_{LD} = 2.7pF$ ,  $[R_F = 604\Omega$ ,  $R_G = 402\Omega$  (EL5178)],  $[R_F = 402\Omega$ ,  $R_G = 274\Omega$  (EL5378)], unless otherwise specified. **(Continued)**

| PARAMETER                     | DESCRIPTION                                                        | CONDITIONS                              | MIN            | TYP       | MAX            | UNIT       |
|-------------------------------|--------------------------------------------------------------------|-----------------------------------------|----------------|-----------|----------------|------------|
| CMIR+                         | Common Mode Positive Input Range at $V_{IN+}$ , $V_{IN-}$ (EL5378) |                                         | 3.1            | 3.4       |                | V          |
| CMIR-                         | Common Mode Negative Input Range at $V_{IN+}$ , $V_{IN-}$ (EL5378) |                                         |                | -4.4      | -4.1           | V          |
| $V_{REFIN+}$                  | Positive Reference Input Voltage Range (EL5378)                    | $V_{IN+} = V_{IN-} = 0V$                | 3.2            | 3.7       |                | V          |
| $V_{REFIN-}$                  | Negative Reference Input Voltage Range (EL5378)                    | $V_{IN+} = V_{IN-} = 0V$                |                | -3.3      | -3.2           | V          |
| $V_{REFOS}$                   | Output Offset Relative to $V_{REF}$ (EL5378)                       |                                         |                | $\pm 50$  | $\pm 100$      | mV         |
| CMRR                          | Input Common Mode Rejection Ratio                                  | $V_{IN} = \pm 2.5V$                     | 65             | 78        |                | dB         |
| <b>OUTPUT CHARACTERISTICS</b> |                                                                    |                                         |                |           |                |            |
| $V_{OUT}$                     | Output Voltage Swing                                               | $R_L = 1k\Omega$                        | $\pm 3.4$      | $\pm 3.7$ |                | V          |
| $I_{OUT(Max)}$                | Maximum Output Current                                             | $R_L = 10\Omega$ , $V_{IN+} = \pm 3.2V$ | $\pm 50$       | $\pm 60$  | $\pm 100$      | mA         |
| $R_{OUT}$                     | Output Impedance                                                   |                                         |                | 130       |                | m $\Omega$ |
| <b>SUPPLY</b>                 |                                                                    |                                         |                |           |                |            |
| $V_{SUPPLY}$                  | Supply Operating Range                                             | $V_{S+}$ to $V_{S-}$                    | 4.75           |           | 11             | V          |
| $I_{S(ON)}$                   | Power Supply Current - Per Channel                                 |                                         | 10             | 12.5      | 14             | mA         |
| $I_{S(OFF)+}$                 | Positive Power Supply Current - Disabled (EL5378)                  | $\overline{EN}$ pin tied to 4.8V        |                | 1.7       | 10             | $\mu A$    |
| $I_{S(OFF)-}$                 | Negative Power Supply Current - Disabled (EL5378)                  |                                         | -200           | -120      |                | $\mu A$    |
| PSRR                          | Power Supply Rejection Ratio                                       | $V_S$ from $\pm 4.5V$ to $\pm 5.5V$     | 60             | 75        |                | dB         |
| <b>ENABLE (EL5378 ONLY)</b>   |                                                                    |                                         |                |           |                |            |
| $t_{EN}$                      | Enable Time                                                        |                                         |                | 130       |                | ns         |
| $t_{DS}$                      | Disable Time                                                       |                                         |                | 1.2       |                | $\mu s$    |
| $V_{IH}$                      | $\overline{EN}$ Pin Voltage for Power-Up                           |                                         |                |           | $V_{S+} - 1.5$ | V          |
| $V_{IL}$                      | $\overline{EN}$ Pin Voltage for Shut-Down                          |                                         | $V_{S+} - 0.5$ |           |                | V          |
| $I_{IH-EN}$                   | $\overline{EN}$ Pin Input Current High                             | At $V_{EN} = 5V$                        |                | 123       | 200            | $\mu A$    |
| $I_{IL-EN}$                   | $\overline{EN}$ Pin Input Current Low                              | At $V_{EN} = 0V$                        | -20            | -8        |                | $\mu A$    |

## Pin Descriptions

| EL5178 | EL5378      | PIN NAME               | PIN FUNCTION                                                        |
|--------|-------------|------------------------|---------------------------------------------------------------------|
| 1      | 17, 21, 27  | FBP1, 2, 3             | Feedback from non-inverting outputs                                 |
| 2      | 2, 6, 10    | INP1, 2, 3             | Non-inverting inputs                                                |
| 3      | 3, 7, 11    | INN1, 2, 3             | Inverting inputs, note that on EL5178, this pin is also the REF pin |
| 4      | 16, 20, 26  | FBN1, 2, 3             | Feedback from inverting outputs                                     |
| 5      | 15, 19, 25  | OUT1B, 2B, 3B          | Inverting outputs                                                   |
| 6      | 24          | VSP                    | Positive supply                                                     |
| 7      | 23          | VSN                    | Negative supply                                                     |
| 8      | 18, 22, 28  | OUT1, 2, 3             | Non-inverting outputs                                               |
|        | 1, 5, 9, 13 | NC                     | No connect; grounded for best crosstalk performance                 |
|        | 4, 8, 12    | REF1, 2, 3             | Reference inputs, sets common-mode output voltage                   |
|        | 14          | $\overline{\text{EN}}$ | ENABLE                                                              |

## Typical Performance Curves

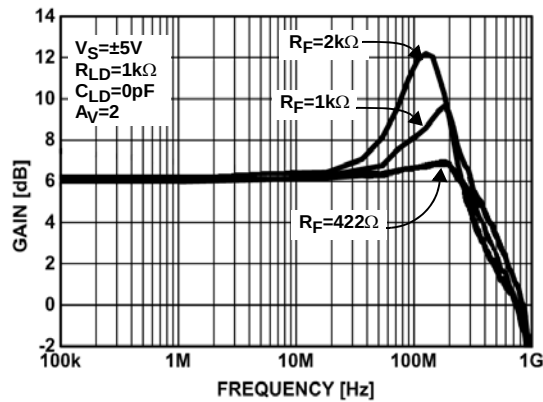


FIGURE 1. EL5178 FREQUENCY RESPONSE FOR VARIOUS  $R_F$

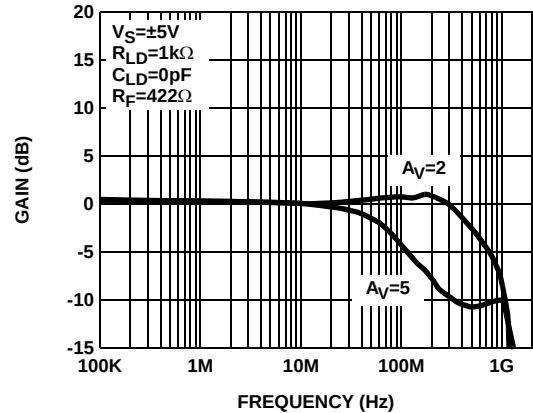


FIGURE 2. EL5178 FREQUENCY RESPONSE FOR VARIOUS GAIN

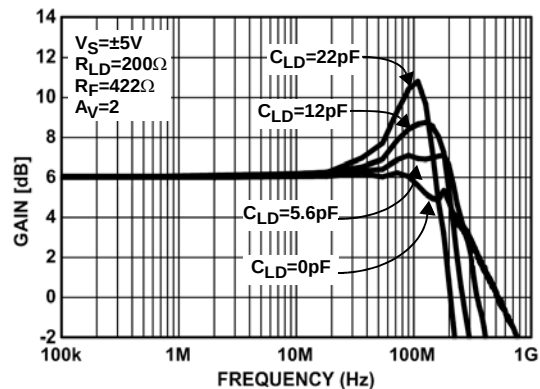


FIGURE 3. EL5178 FREQUENCY RESPONSE FOR VARIOUS  $C_{LD}$

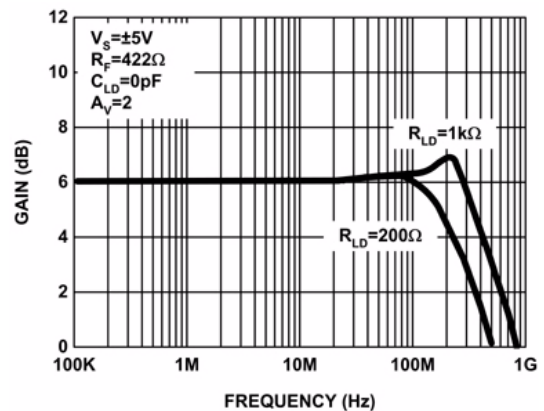


FIGURE 4. EL5178 FREQUENCY RESPONSE FOR VARIOUS  $R_{LD}$

Typical Performance Curves (Continued)

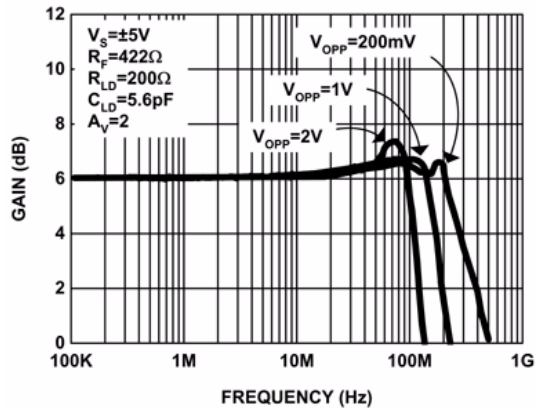


FIGURE 5. EL5178 FREQUENCY RESPONSE FOR VARIOUS  $V_{OPP}$

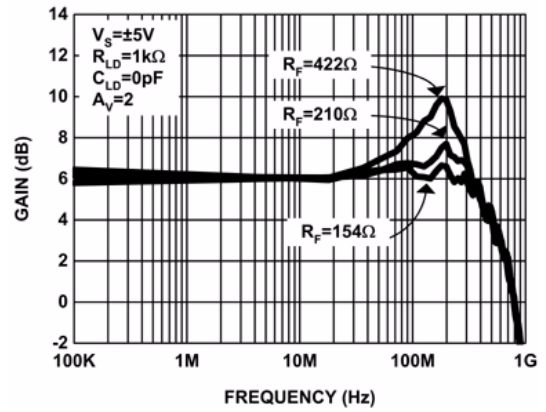


FIGURE 6. EL5378 FREQUENCY RESPONSE FOR VARIOUS  $R_F$

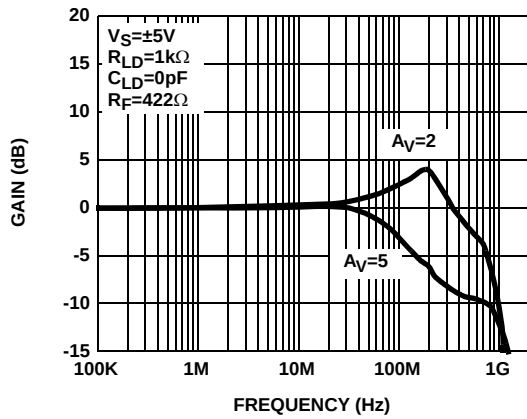


FIGURE 7. EL5378 FREQUENCY RESPONSE FOR VARIOUS GAIN

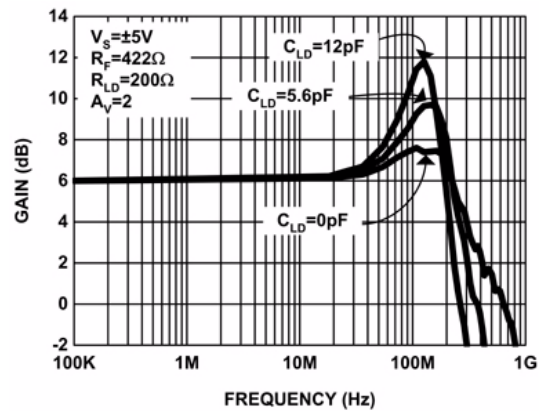


FIGURE 8. EL5378 FREQUENCY RESPONSE FOR VARIOUS  $C_{LD}$

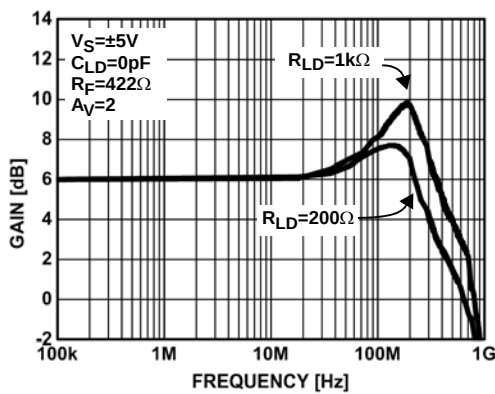


FIGURE 9. EL5378 FREQUENCY RESPONSE FOR VARIOUS  $R_{LD}$

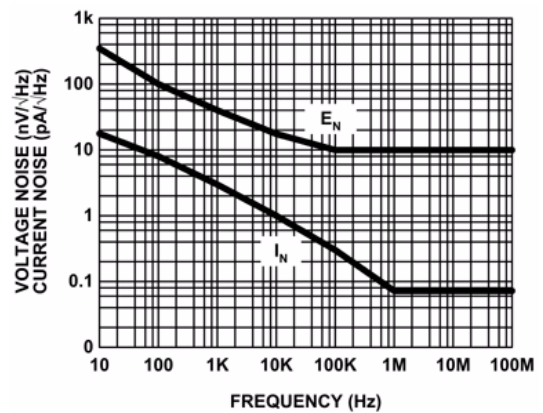


FIGURE 10. VOLTAGE AND CURRENT NOISE vs FREQUENCY

Typical Performance Curves (Continued)

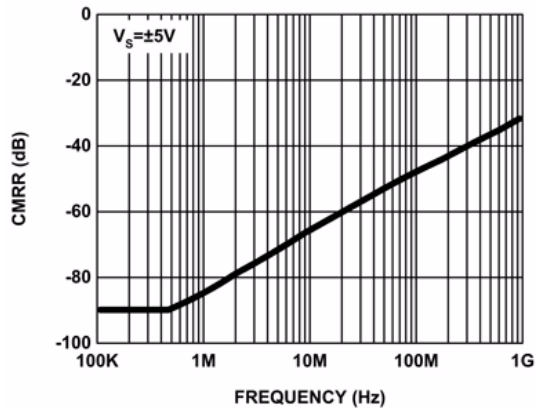


FIGURE 11. CMRR vs FREQUENCY

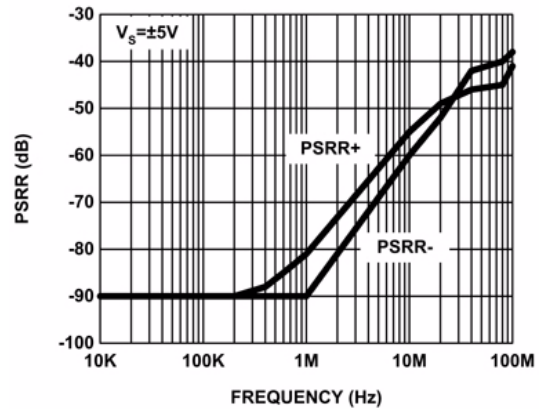


FIGURE 12. DIFFERENTIAL PSRR vs FREQUENCY

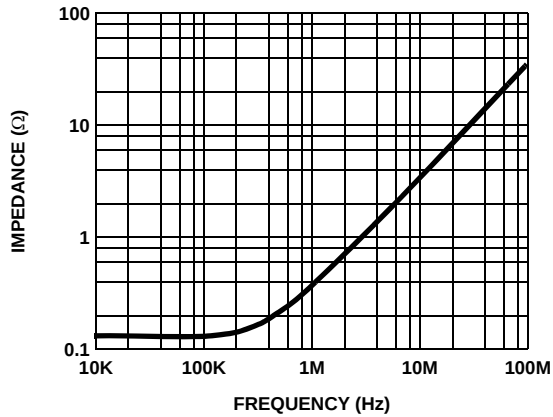


FIGURE 13. OUTPUT IMPEDANCE vs FREQUENCY

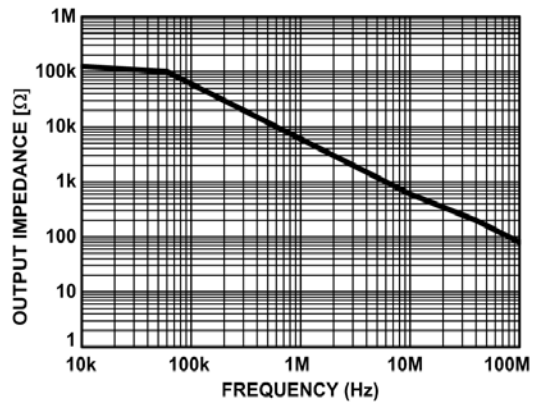


FIGURE 14. OUTPUT IMPEDANCE [DISABLED]

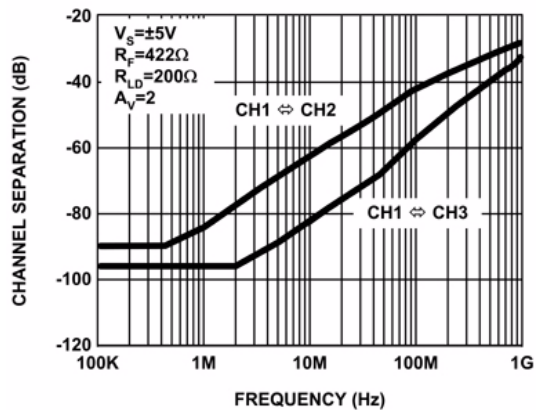


FIGURE 15. CHANNEL SEPARATION vs FREQUENCY

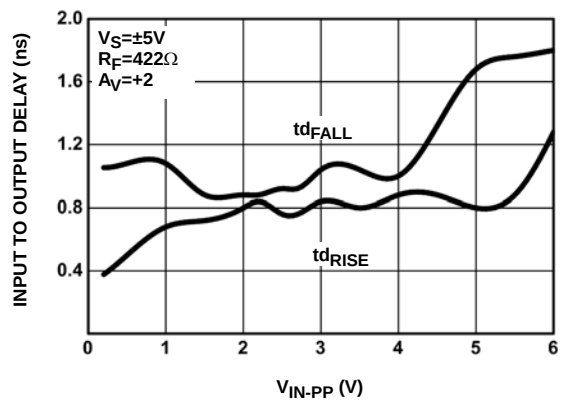


FIGURE 16. INPUT TO OUTPUT DELAY

# Typical Performance Curves (Continued)

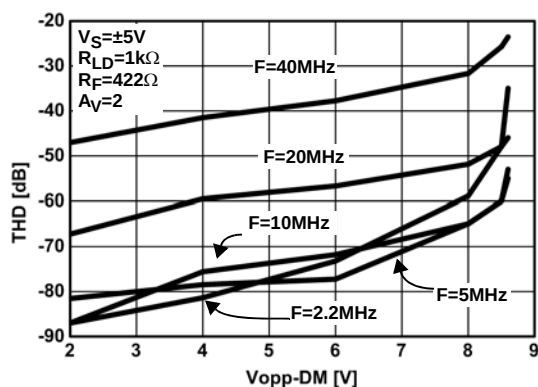


FIGURE 17. TOTAL HARMONIC DISTORTION vs DIFFERENTIAL OUTPUT SWING

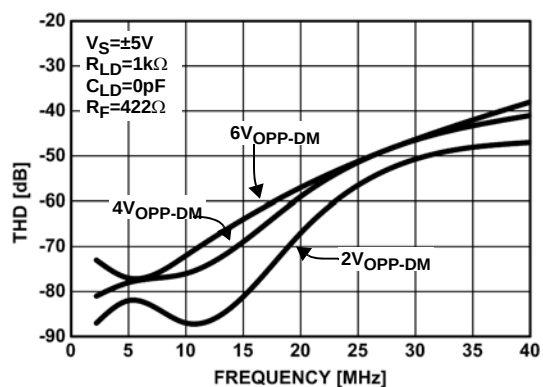


FIGURE 18. TOTAL HARMONIC DISTORTION vs FREQUENCY

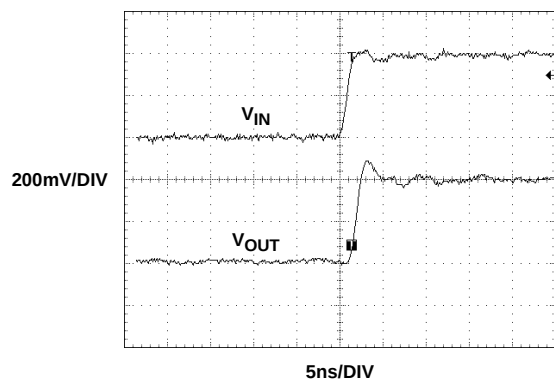


FIGURE 19. SMALL SIGNAL TRANSIENT RESPONSE

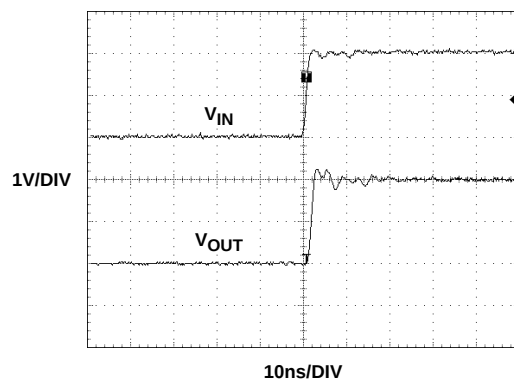


FIGURE 20. LARGE SIGNAL TRANSIENT RESPONSE

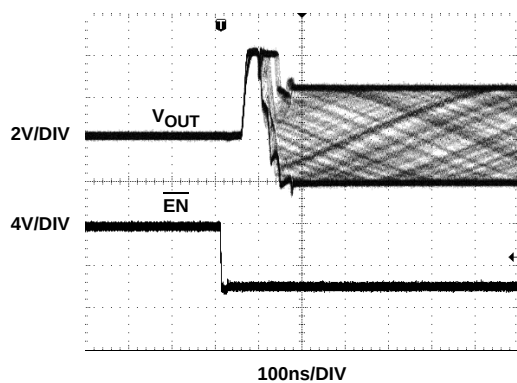


FIGURE 21. EL5378 ENABLED RESPONSE

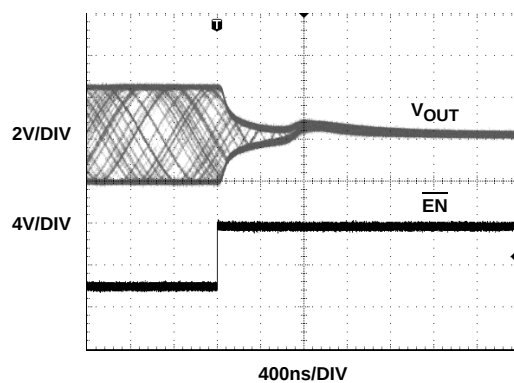


FIGURE 22. EL5378 DISABLED RESPONSE

## Typical Performance Curves (Continued)

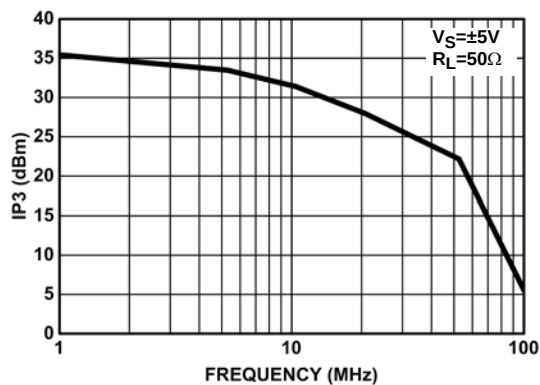


FIGURE 23. IP3 vs FREQUENCY

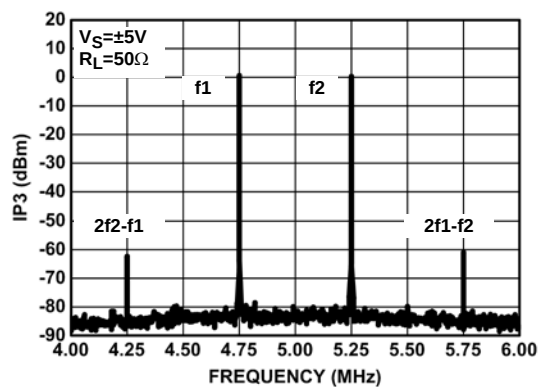


FIGURE 24. THIRD ORDER INTERCEPT POINT

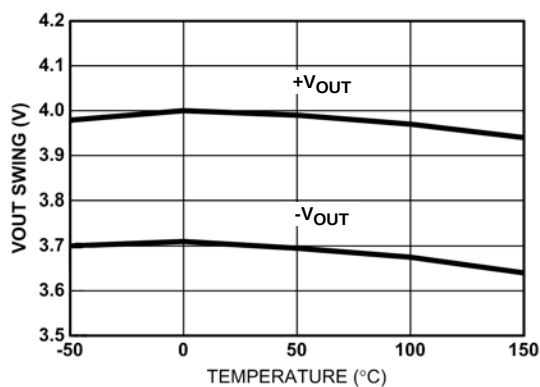


FIGURE 25. OUTPUT SWING vs TEMPERATURE

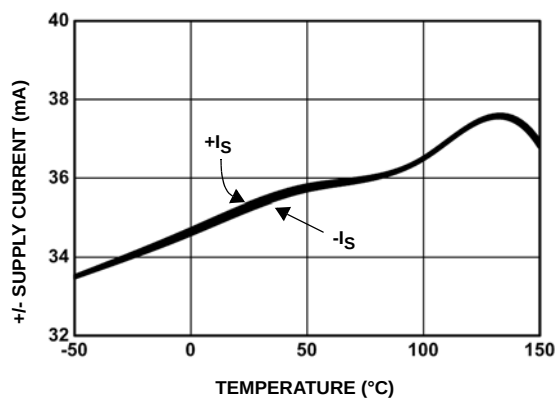


FIGURE 26. +/- SUPPLY CURRENT vs TEMPERATURE

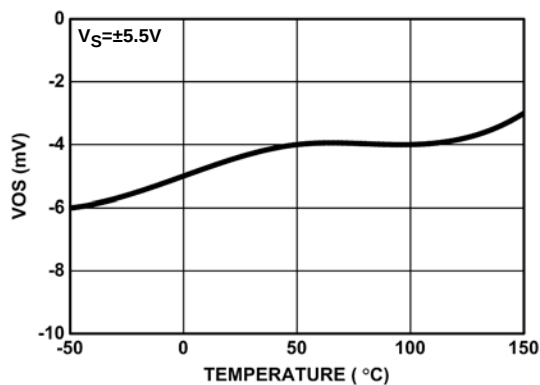


FIGURE 27. OFFSET VOLTAGE vs TEMPERATURE

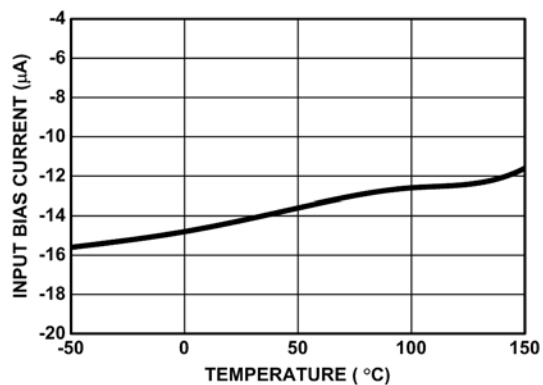


FIGURE 28. INPUT BIAS CURRENT vs TEMPERATURE

Typical Performance Curves (Continued)

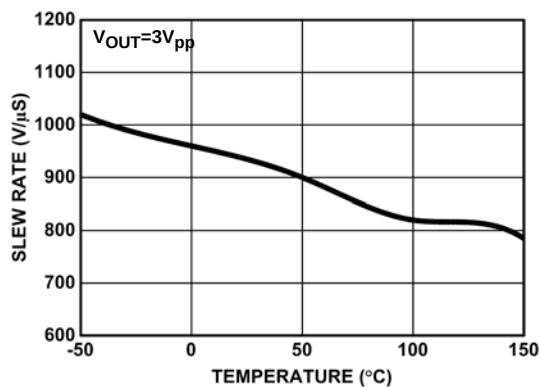


FIGURE 29. SLEW RATE vs TEMPERATURE

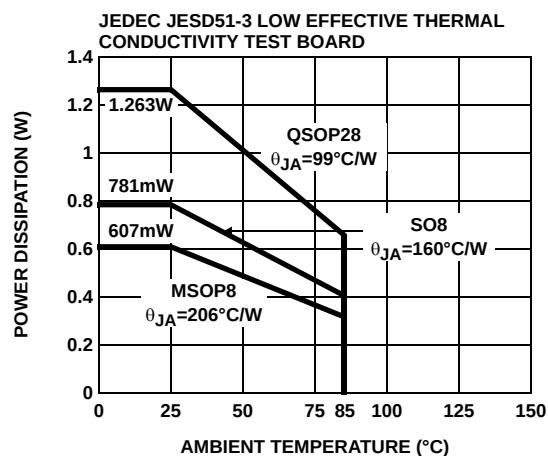


FIGURE 30. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE



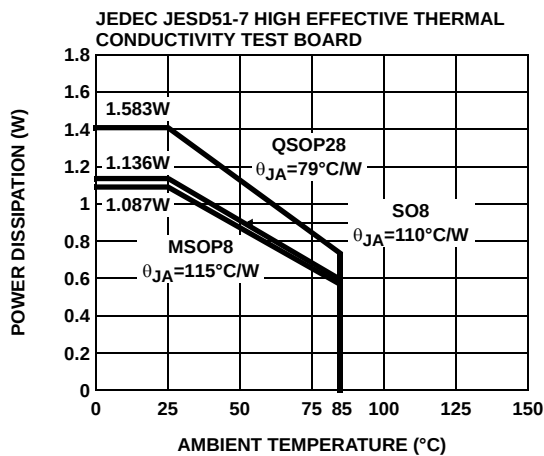



FIGURE 31. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

## Connection Diagrams

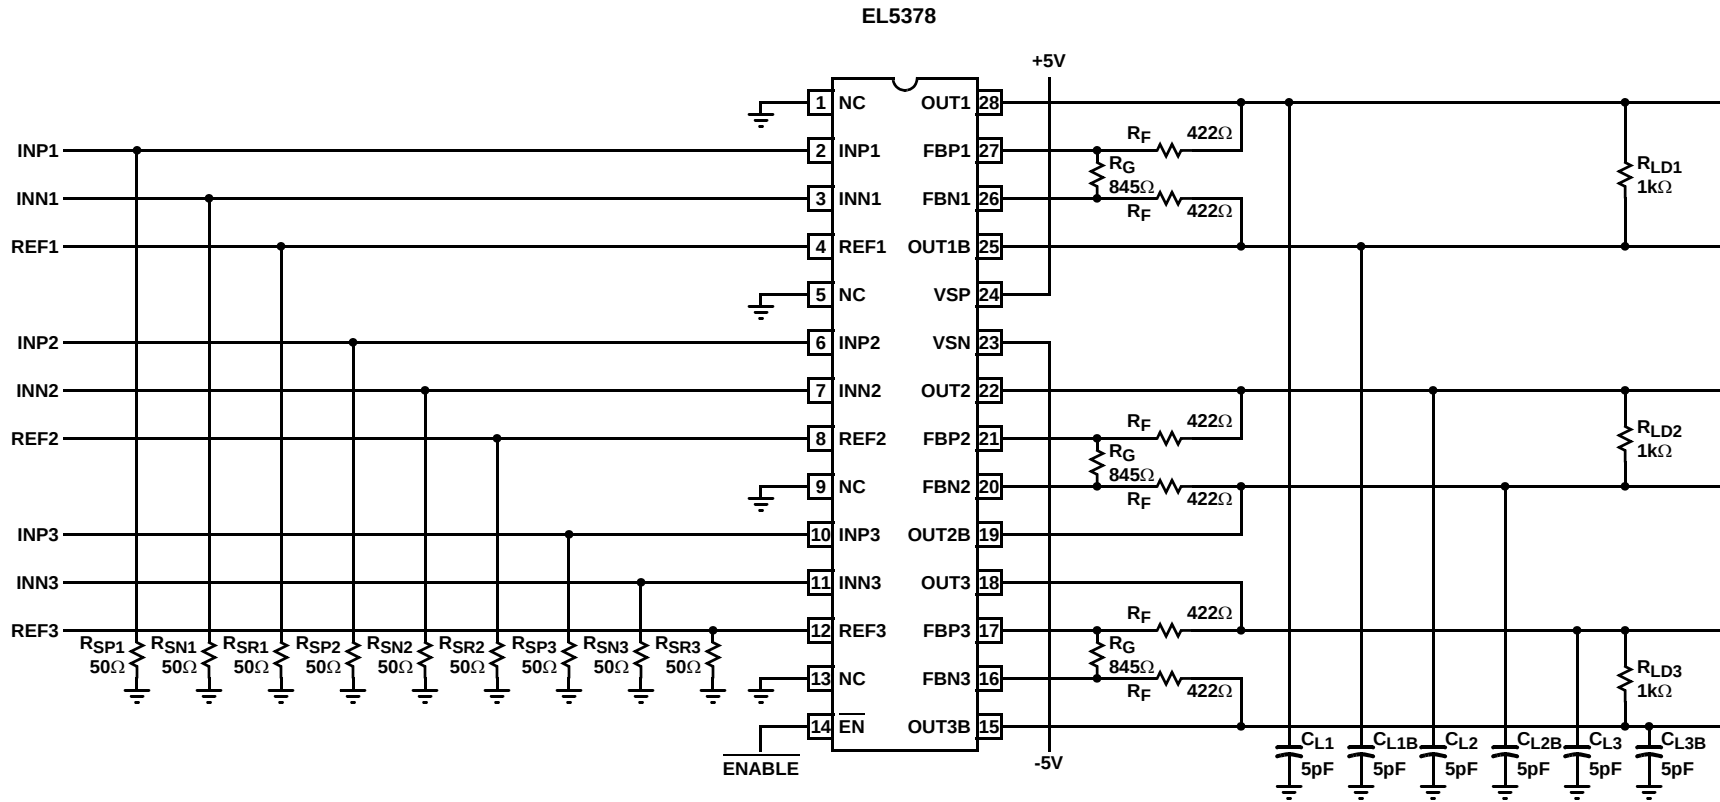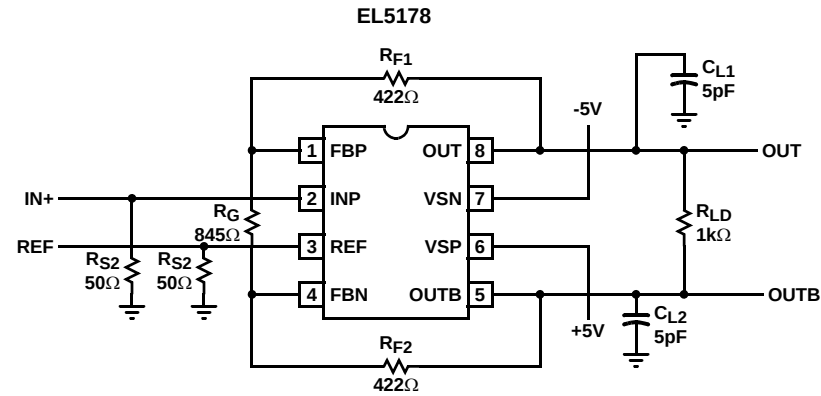

EL5178, EL5378

## Simplified Schematic

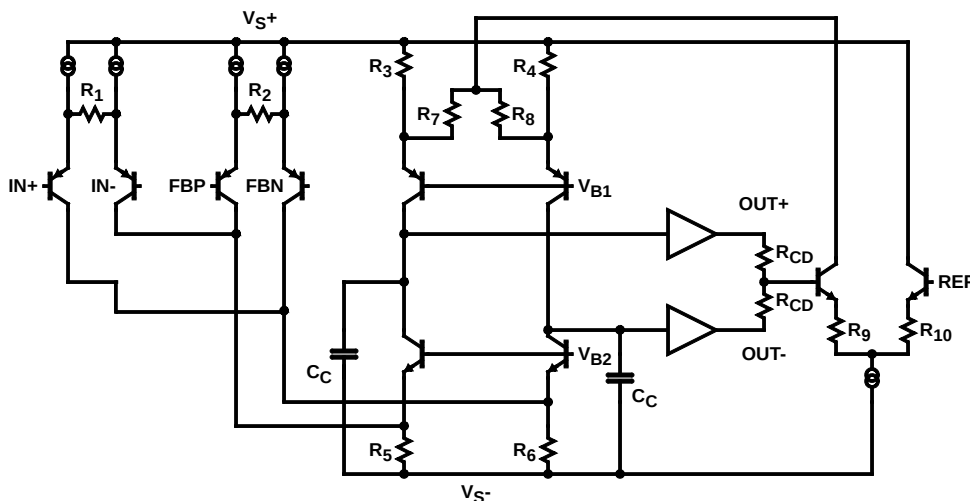

## Description of Operation and Application Information

### Product Description

The EL5178 and EL5378 are wide bandwidth, low power and single/differential ended to differential output amplifiers. The EL5178 is a single channel differential amplifier. Since the  $I_{N-}$  pin and REF pin are tied together internally, the EL5178 can be used as a single ended to differential converter. The EL5378 is a triple channel differential amplifier. The EL5378 have a separate  $I_{N-}$  pin and REF pin for each channel. It can be used as single/differential ended to differential converter. The EL5178 and EL5378 are internally compensated for closed loop gain of 1 or greater. Connected in gain of 2 and driving a  $1k\Omega$  differential load, the EL5178 and EL5378 have a -3dB bandwidth of 700MHz. Driving a  $200\Omega$  differential load at gain of 2, the bandwidth is about 320MHz. The EL5378 is available with a power down feature to reduce the power while the amplifier is disabled.

### Input, Output, and Supply Voltage Range

The EL5178 and EL5378 have been designed to operate with a single supply voltage of 5V to 10V or a split supplies with its total voltage from 5V to 10V. The amplifiers have an input common mode voltage range from -4.3V to 3.4V for  $\pm 5V$  supply. The differential mode input range (DMIR) between the two inputs is from -2.3V to +2.3V. The input voltage range at the REF pin is from -3.3V to 3.7V. If the input common mode or differential mode signal is outside the above-specified ranges, it will cause the output signal distorted.

The output of the EL5178 and EL5378 can swing from -3.8V to +3.8V at  $1k\Omega$  differential load at  $\pm 5V$  supply. As the load resistance becomes lower, the output swing is reduced.

### Differential and Common Mode Gain Settings

For EL5178, since the  $I_{N-}$  pin and REF pin are bounded together as the REF pin in an 8 Ld package, the signal at the REF pin is part of the common mode signal and also part of the differential mode signal. For the true balance differential outputs, the REF pin must be tied to the same bias level as the  $I_{N+}$  pin. For a  $\pm 5V$  supply, just tie the REF pin to GND if the  $I_{N+}$  pin is biased at 0V with a  $50\Omega$  or  $75\Omega$  termination resistor. For a single supply application, if the  $I_{N+}$  is biased to half of the rail, the REF pin should be biased to half of the rail also.

The gain setting for EL5178 is:

$$V_{ODM} = V_{IN+} \times \left( 1 + \frac{R_{F1} + R_{F2}}{R_G} \right)$$

$$V_{ODM} = V_{IN+} \times \left( 1 + \frac{2R_F}{R_G} \right)$$

$$V_{OCM} = V_{REF} = 0V$$

Where:

$$V_{REF} = 0V$$

$$R_{F1} = R_{F2} = R_F$$

EL5378 have a separate  $I_{N-}$  pin and REF pin. It can be used as a single/differential ended to differential converter. The voltage applied at REF pin can set the output common mode voltage and the gain is one.

The gain setting for EL5378 is:

$$V_{ODM} = (V_{IN+} - V_{IN-}) \times \left(1 + \frac{R_{F1} + R_{F2}}{R_G}\right)$$

$$V_{ODM} = (V_{IN+} - V_{IN-}) \times \left(1 + \frac{2R_F}{R_G}\right)$$

$$V_{OCM} = V_{REF}$$

Where:

$$R_{F1} = R_{F2} = R_F$$

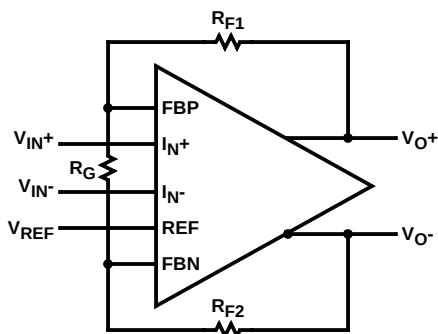


FIGURE 32.

### Choice of Feedback Resistor and Gain Bandwidth Product

For gains greater than 1, the feedback resistor forms a pole with the parasitic capacitance at the inverting input. As this pole becomes smaller, the amplifier's phase margin is reduced. This causes ringing in the time domain and peaking in the frequency domain. Therefore,  $R_F$  has some maximum value that should not be exceeded for optimum performance. If a large value of  $R_F$  must be used, a small capacitor in the few Pico farad range in parallel with  $R_F$  can help to reduce the ringing and peaking at the expense of reducing the bandwidth.

The bandwidth of the EL5178 and EL5378 depends on the load and the feedback network.  $R_F$  and  $R_G$  appear in parallel with the load for gains other than 1. As this combination gets smaller, the bandwidth falls off. Consequently,  $R_F$  also has a minimum value that should not be exceeded for optimum bandwidth performance. For the gains other than 1, optimum response is obtained with  $R_F$  between 500Ω to 1kΩ.

The EL5178 and EL5378 have a gain bandwidth product of 350MHz for  $R_{LD} = 1k\Omega$ . For gains  $\geq 5$ , its bandwidth can be predicted by the following equation:

$$\text{Gain} \times \text{BW} = 300\text{MHz}$$

### Driving Capacitive Loads and Cables

The EL5178 and EL5378 can drive 23pF differential capacitor in parallel with 200Ω differential load with less than 5dB of peaking at gain of 2. If less peaking is desired in applications, a small series resistor (usually between 5Ω to 50Ω) can be placed in series with each output to eliminate most peaking. However, this will reduce the gain slightly. If the gain setting is greater than 2, the gain resistor  $R_G$  can then be chosen to make up for any gain loss which may be created by the additional series resistor at the output.

When used as a cable driver, double termination is always recommended for reflection-free performance. For those applications, a back-termination series resistor at the amplifier's output will isolate the amplifier from the cable and allow extensive capacitive drive. However, other applications may have high capacitive loads without a back-termination resistor. Again, a small series resistor at the output can help to reduce peaking.

### Disable/Power-Down (for EL5378 only)

The EL5378 can be disabled and placed its outputs in a high impedance state. The turn off time is about 1.2μs and the turn on time is about 130ns. When disabled, the amplifier's supply current is reduced to 1.7μA for  $I_{S+}$  and 120μA for  $I_{S-}$  typically, thereby effectively eliminating the power consumption. The amplifier's power down can be controlled by standard CMOS signal levels at the EN pin. The applied logic signal is relative to  $V_{S+}$  pin. Letting the  $\overline{\text{EN}}$  pin float or applying a signal that is less than 1.5V below  $V_{S+}$  will enable the amplifier. The amplifier will be disabled when the signal at  $\overline{\text{EN}}$  pin is above  $V_{S+} - 0.5V$ .

### Output Drive Capability

The EL5178 and EL5378 have internal short circuit protection. Its typical short circuit current is ±60mA. If the output is shorted indefinitely, the power dissipation could easily increase such that the part will be destroyed. Maximum reliability is maintained if the output current never exceeds ±60mA. This limit is set by the design of the internal metal interconnections.

### Power Dissipation

With the high output drive capability of the EL5178 and EL5378. It is possible to exceed the +135°C absolute maximum junction temperature under certain load current conditions. Therefore, it is important to calculate the maximum junction temperature for the application to determine if the load conditions or package types need to be modified for the amplifier to remain in the safe operating area.

The maximum power dissipation allowed in a package is determined according to:

$$PD_{MAX} = \frac{T_{JMAX} - T_{AMAX}}{\Theta_{JA}}$$

Where:

$T_{JMAX}$  = Maximum junction temperature

$T_{AMAX}$  = Maximum ambient temperature

$\theta_{JA}$  = Thermal resistance of the package

The maximum power dissipation actually produced by an IC is the total quiescent supply current times the total power supply voltage, plus the power in the IC due to the load, or:

$$PD = i \times \left( V_S \times I_{SMAX} + V_S \times \frac{\Delta V_O}{R_{LD}} \right)$$

Where:

$V_S$  = Total supply voltage

$I_{SMAX}$  = Maximum quiescent supply current per channel

$\Delta V_O$  = Maximum differential output voltage of the application

$R_{LD}$  = Differential load resistance

$I_{LOAD}$  = Load current

$i$  = Number of channels

By setting the two  $PD_{MAX}$  equations equal to each other, we can solve the output current and  $R_{LD}$  to avoid the device overheat.

### Typical Applications

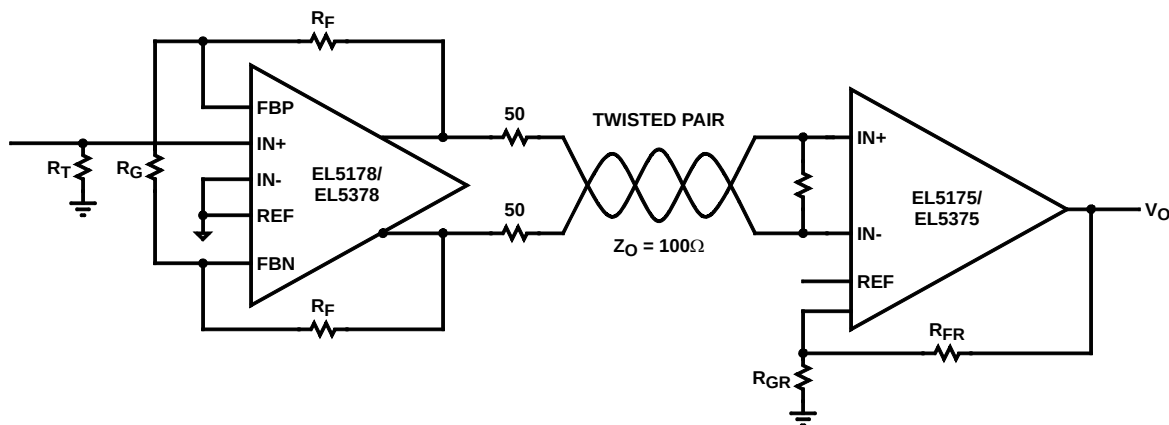



FIGURE 33. TWISTED PAIR CABLE RECEIVER

As the signal is transmitted through a cable, the high frequency signal will be attenuated. One way to compensate this loss is to boost the high frequency gain at the receiver side.

### Power Supply Bypassing and Printed Circuit Board Layout


As with any high frequency device, a good printed circuit board layout is necessary for optimum performance. Lead lengths should be as short as possible. The power supply pin must be well bypassed to reduce the risk of oscillation. For normal single supply operation, where the  $V_S$ - pin is connected to the ground plane, a single 4.7 $\mu$ F tantalum capacitor in parallel with a 0.1 $\mu$ F ceramic capacitor from  $V_S$ + to GND will suffice. This same capacitor combination should be placed at each supply pin to ground if split supplies are to be used. In this case, the  $V_S$ - pin becomes the negative supply rail.

For good AC performance, parasitic capacitance should be kept to minimum. Use of wire wound resistors should be avoided because of their additional series inductance. Use of sockets should also be avoided if possible. Sockets add parasitic inductance and capacitance that can result in compromised performance. Minimizing parasitic capacitance at the amplifier's inverting input pin is very important. The feedback resistor should be placed very close to the inverting input pin. Strip line design techniques are recommended for the signal traces.

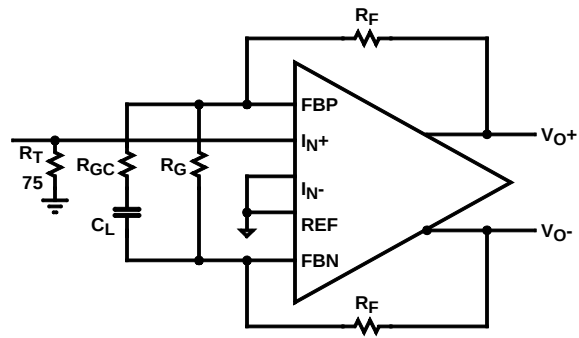

$$\text{DC Gain} = 1 + \frac{2R_F}{R_G}$$

$$(\text{HF})\text{Gain} = 1 + \frac{2R_F}{R_G \parallel R_{GC}}$$

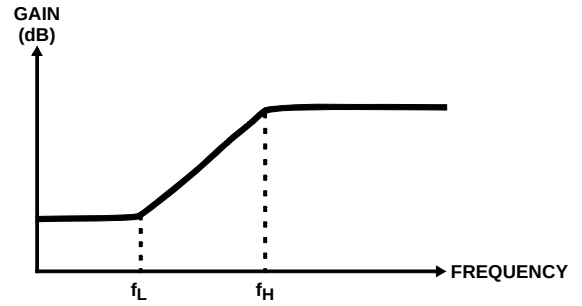


$$f_L \cong \frac{1}{2\pi R_G C_C}$$

$$f_H \cong \frac{1}{2\pi R_{GC} C_C}$$

FIGURE 34. TRANSMIT EQUALIZER

# Small Outline Package Family (SO)

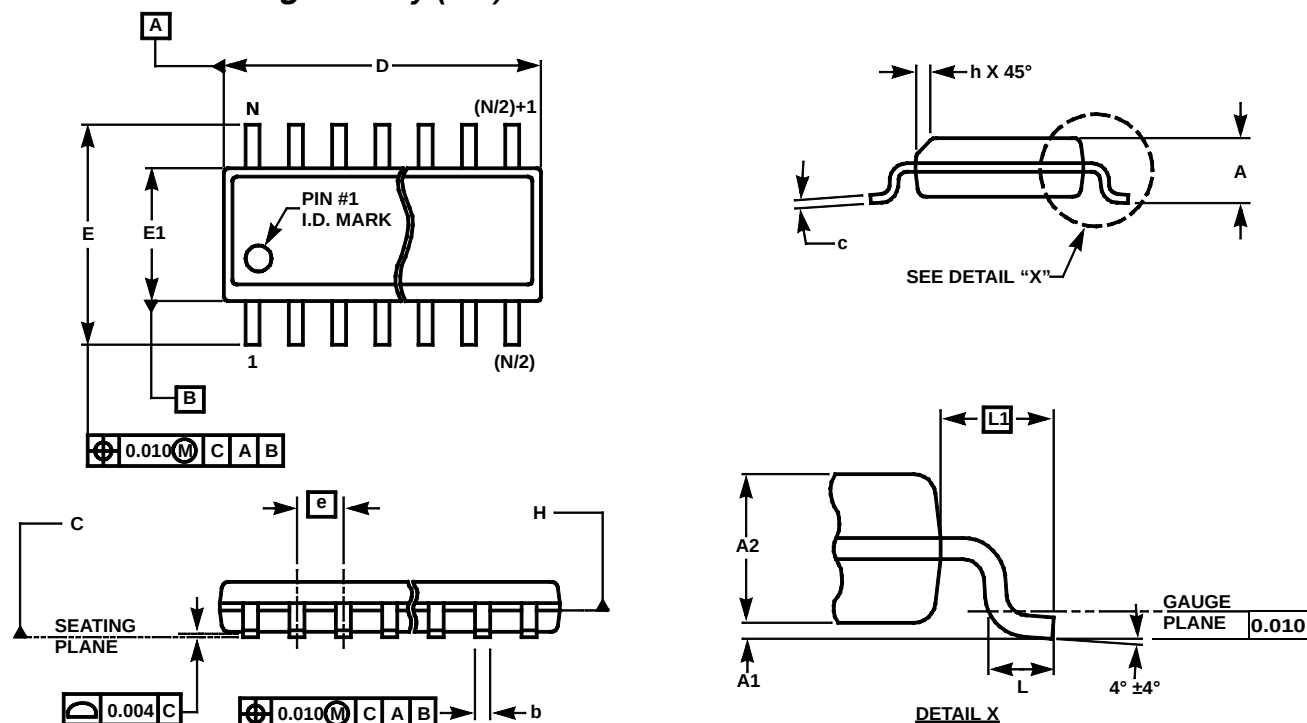

## MDP0027

### SMALL OUTLINE PACKAGE FAMILY (SO)





| SYMBOL | INCHES |       |                  |                           |                  |                  |                  | TOLERANCE | NOTES |
|--------|--------|-------|------------------|---------------------------|------------------|------------------|------------------|-----------|-------|
|        | SO-8   | SO-14 | SO16<br>(0.150") | SO16 (0.300")<br>(SOL-16) | SO20<br>(SOL-20) | SO24<br>(SOL-24) | SO28<br>(SOL-28) |           |       |
| A      | 0.068  | 0.068 | 0.068            | 0.104                     | 0.104            | 0.104            | 0.104            | MAX       | -     |
| A1     | 0.006  | 0.006 | 0.006            | 0.007                     | 0.007            | 0.007            | 0.007            | ±0.003    | -     |
| A2     | 0.057  | 0.057 | 0.057            | 0.092                     | 0.092            | 0.092            | 0.092            | ±0.002    | -     |
| b      | 0.017  | 0.017 | 0.017            | 0.017                     | 0.017            | 0.017            | 0.017            | ±0.003    | -     |
| c      | 0.009  | 0.009 | 0.009            | 0.011                     | 0.011            | 0.011            | 0.011            | ±0.001    | -     |
| D      | 0.193  | 0.341 | 0.390            | 0.406                     | 0.504            | 0.606            | 0.704            | ±0.004    | 1, 3  |
| E      | 0.236  | 0.236 | 0.236            | 0.406                     | 0.406            | 0.406            | 0.406            | ±0.008    | -     |
| E1     | 0.154  | 0.154 | 0.154            | 0.295                     | 0.295            | 0.295            | 0.295            | ±0.004    | 2, 3  |
| e      | 0.050  | 0.050 | 0.050            | 0.050                     | 0.050            | 0.050            | 0.050            | Basic     | -     |
| L      | 0.025  | 0.025 | 0.025            | 0.030                     | 0.030            | 0.030            | 0.030            | ±0.009    | -     |
| L1     | 0.041  | 0.041 | 0.041            | 0.056                     | 0.056            | 0.056            | 0.056            | Basic     | -     |
| h      | 0.013  | 0.013 | 0.013            | 0.020                     | 0.020            | 0.020            | 0.020            | Reference | -     |
| N      | 8      | 14    | 16               | 16                        | 20               | 24               | 28               | Reference | -     |

Rev. M 2/07

#### NOTES:

1. Plastic or metal protrusions of 0.006" maximum per side are not included.
2. Plastic interlead protrusions of 0.010" maximum per side are not included.
3. Dimensions "D" and "E1" are measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994

# Mini SO Package Family (MSOP)

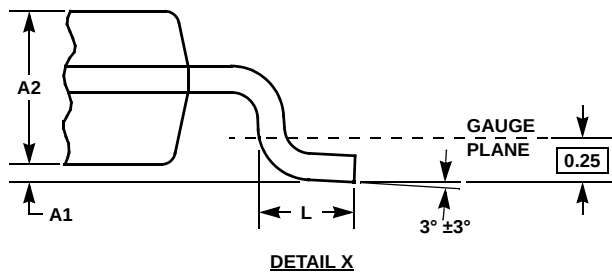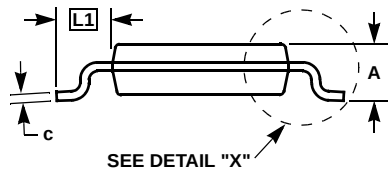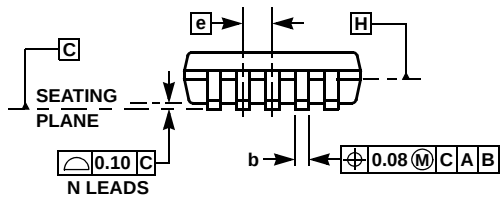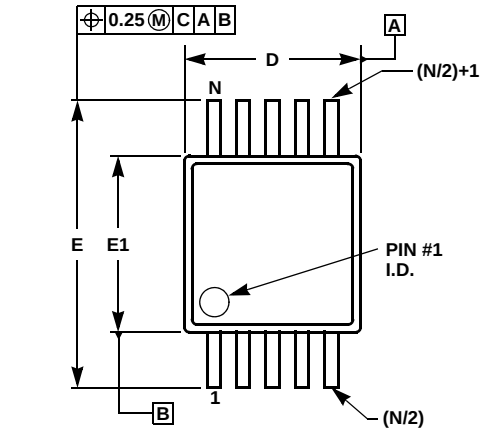

## MDP0043

### MINI SO PACKAGE FAMILY


| SYMBOL | MILLIMETERS |        | TOLERANCE   | NOTES |
|--------|-------------|--------|-------------|-------|
|        | MSOP8       | MSOP10 |             |       |
| A      | 1.10        | 1.10   | Max.        | -     |
| A1     | 0.10        | 0.10   | ±0.05       | -     |
| A2     | 0.86        | 0.86   | ±0.09       | -     |
| b      | 0.33        | 0.23   | +0.07/-0.08 | -     |
| c      | 0.18        | 0.18   | ±0.05       | -     |
| D      | 3.00        | 3.00   | ±0.10       | 1, 3  |
| E      | 4.90        | 4.90   | ±0.15       | -     |
| E1     | 3.00        | 3.00   | ±0.10       | 2, 3  |
| e      | 0.65        | 0.50   | Basic       | -     |
| L      | 0.55        | 0.55   | ±0.15       | -     |
| L1     | 0.95        | 0.95   | Basic       | -     |
| N      | 8           | 10     | Reference   | -     |

Rev. D 2/07

#### NOTES:

1. Plastic or metal protrusions of 0.15mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25mm maximum per side are not included.
3. Dimensions "D" and "E1" are measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994.

# Quarter Size Outline Plastic Packages Family (QSOP)

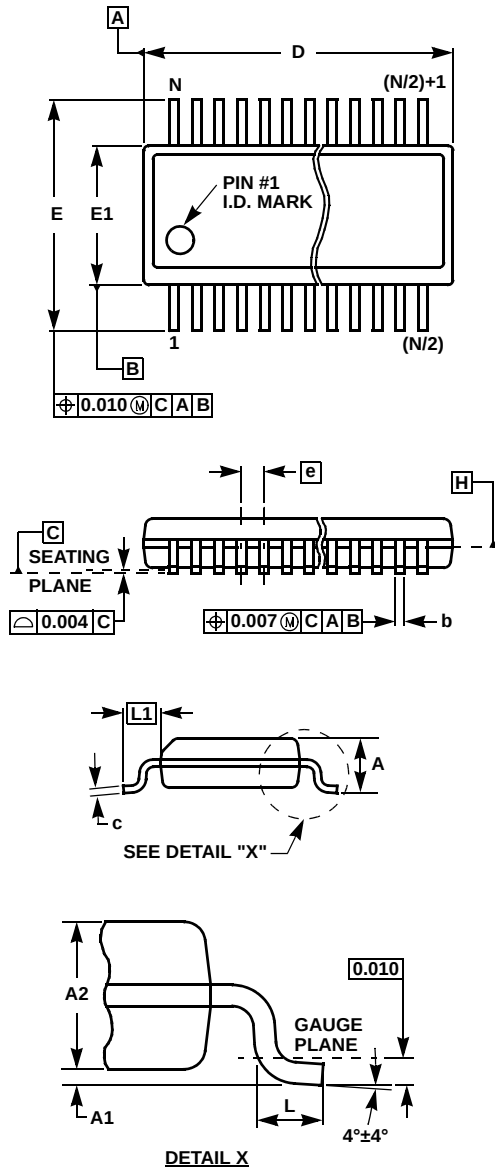

## MDP0040

### QUARTER SIZE OUTLINE PLASTIC PACKAGES FAMILY

| SYMBOL | INCHES |        |        | TOLERANCE | NOTES |
|--------|--------|--------|--------|-----------|-------|
|        | QSOP16 | QSOP24 | QSOP28 |           |       |
| A      | 0.068  | 0.068  | 0.068  | Max.      | -     |
| A1     | 0.006  | 0.006  | 0.006  | ±0.002    | -     |
| A2     | 0.056  | 0.056  | 0.056  | ±0.004    | -     |
| b      | 0.010  | 0.010  | 0.010  | ±0.002    | -     |
| c      | 0.008  | 0.008  | 0.008  | ±0.001    | -     |
| D      | 0.193  | 0.341  | 0.390  | ±0.004    | 1, 3  |
| E      | 0.236  | 0.236  | 0.236  | ±0.008    | -     |
| E1     | 0.154  | 0.154  | 0.154  | ±0.004    | 2, 3  |
| e      | 0.025  | 0.025  | 0.025  | Basic     | -     |
| L      | 0.025  | 0.025  | 0.025  | ±0.009    | -     |
| L1     | 0.041  | 0.041  | 0.041  | Basic     | -     |
| N      | 16     | 24     | 28     | Reference | -     |

Rev. F 2/07

#### NOTES:

1. Plastic or metal protrusions of 0.006" maximum per side are not included.
2. Plastic interlead protrusions of 0.010" maximum per side are not included.
3. Dimensions "D" and "E1" are measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.

Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)