

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A

Voltage rating: 250 VAC

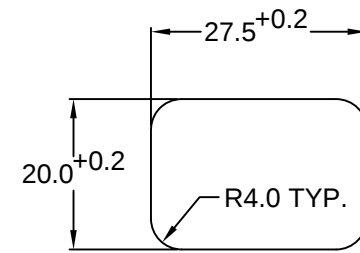
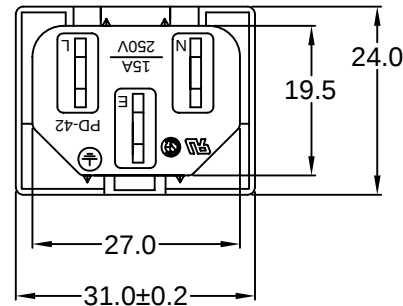

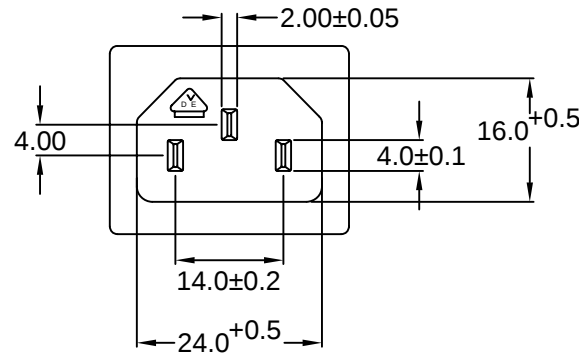
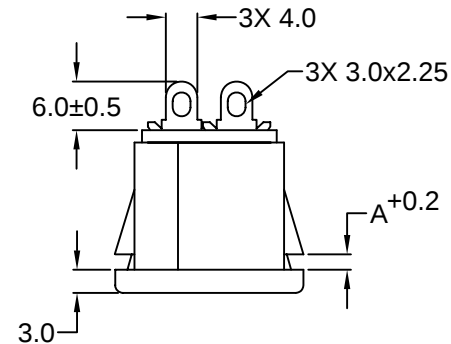
Current rating: 15 A

Voltage rating: 250 VAC

**ORDERING CODE:**42R03-3 $\frac{5}{1}$ - $\frac{2}{2}$ - $\frac{3}{3}$ **1) COLOR**

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION1 = 15A 250V 120°C
2+GROUND2 = 15A 250V 70°C
2+GROUND4 = 15A 250V 70°C
2 POLE**3) PANEL THICKNESS****RECOMMENDED
PANEL CUTOUT**REPLACE WITH
CORRESPONDING
PANEL THICKNESS

P/N	A	MAX. PANEL THICKNESS
42R03-3X5X-150	1.5	1.5
42R03-3X5X-200	2.0	2.0
42R03-3X5X-250	2.5	2.5

ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUESTTOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C14 APPL. INLET; SOLDER
TERMINALS; SNAP-INPART #: **42R03-3X5X-XXX****SHEET
1 of 1**SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

**RoHS
COMPLIANT**

REVISIONS

REV	DATE	CHANGE	CHK	APPR