

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 16 A

Voltage rating: 250 VAC

Current rating: 20 A

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:42R06-1 $\frac{1}{1}$ $\frac{1}{2}$ **1) COLOR**

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION

1 = 20A 250V 70°C

2+GROUND



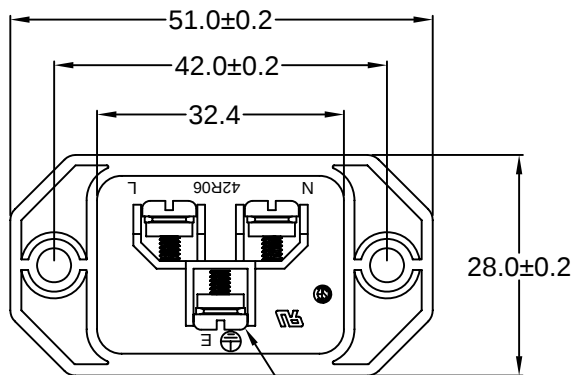
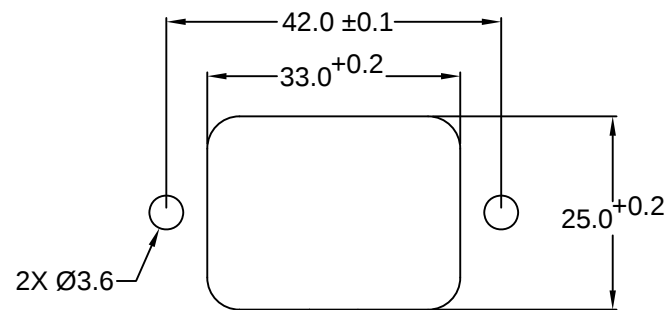
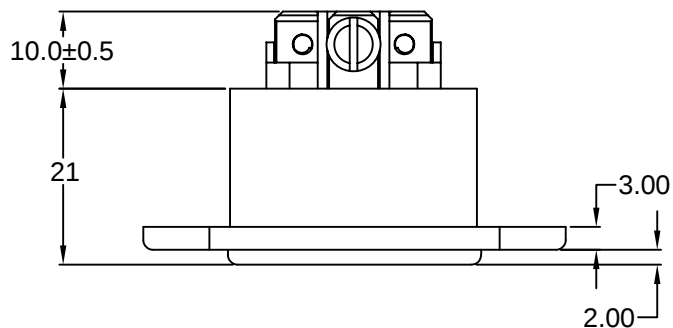
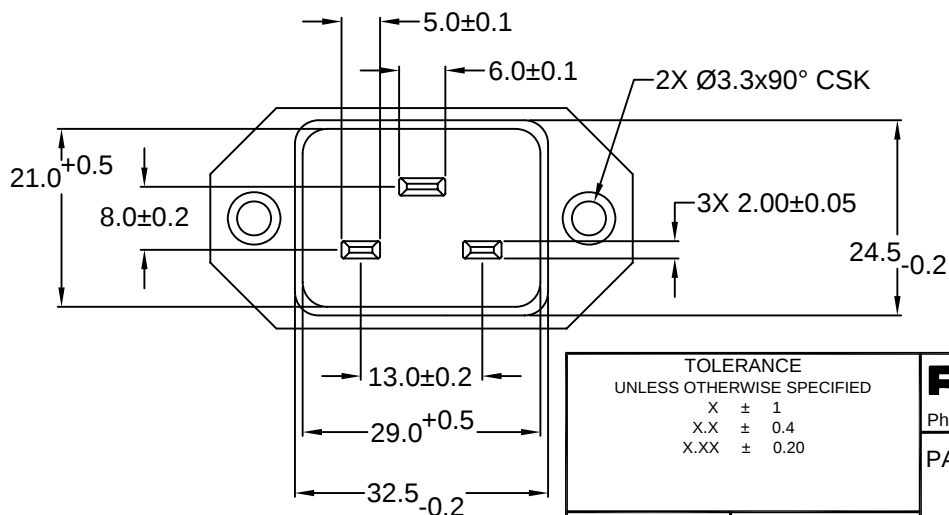

2 = 20A 250V 155°C

2+GROUND



4 = 20A 250V 70°C

2 POLE

M3x6.0mm
SCREW TERMINIALSRECOMMENDED
PANEL CUTOUTRoHS
COMPLIANTTOLERANCE
UNLESS OTHERWISE SPECIFIEDX ± 1
X.X ± 0.4
X.XX ± 0.20**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 16/20A IEC 60320 APPL. INLET; SCREW
TERMINALS; SIDE FLANGE, PANEL MOUNT

DRAWN BY	GQ	DATE:	08/21/01
CHECK BY	TD	DATE:	08/28/01
APPR BY	PB	DATE:	08/28/01

PART #: 42R06-1X1X

SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHNG CHECK APPR

CHANGE

DATE

REV

6

5

4

3

2

1