

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 16 A

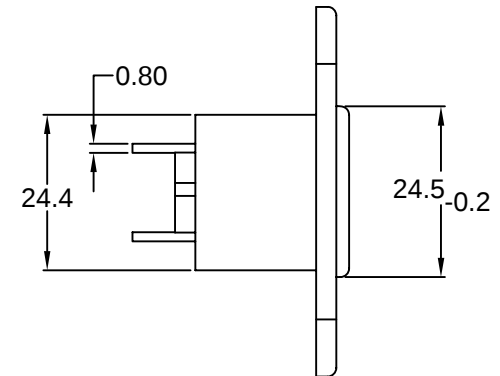
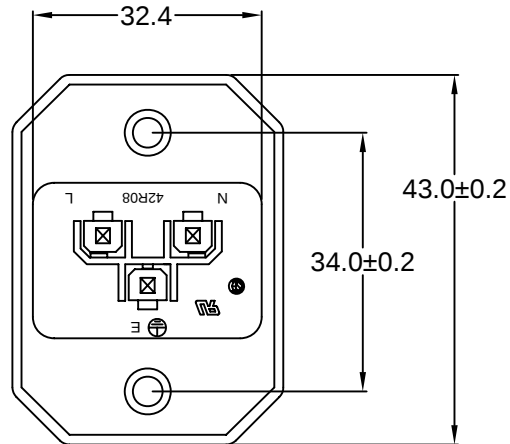
Voltage rating: 250 VAC

Current rating: 20 A

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

**ORDERING CODE:**42R08-2 $\frac{2}{1 \quad 2}$ **1) COLOR**

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION

1 = 20A 250V 70°C

2+GROUND



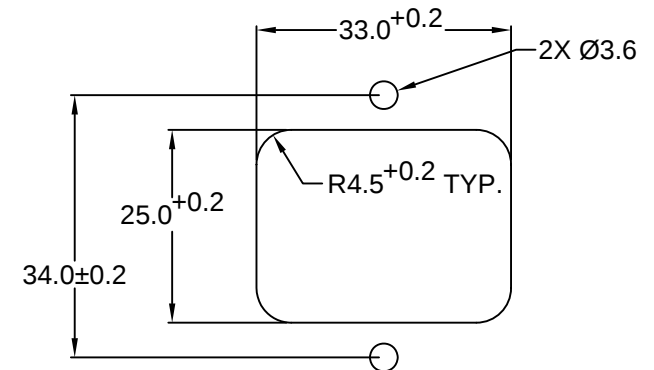
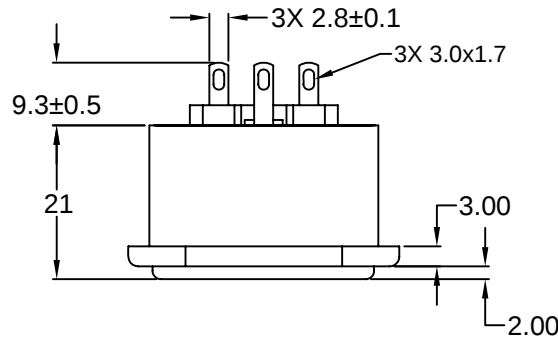
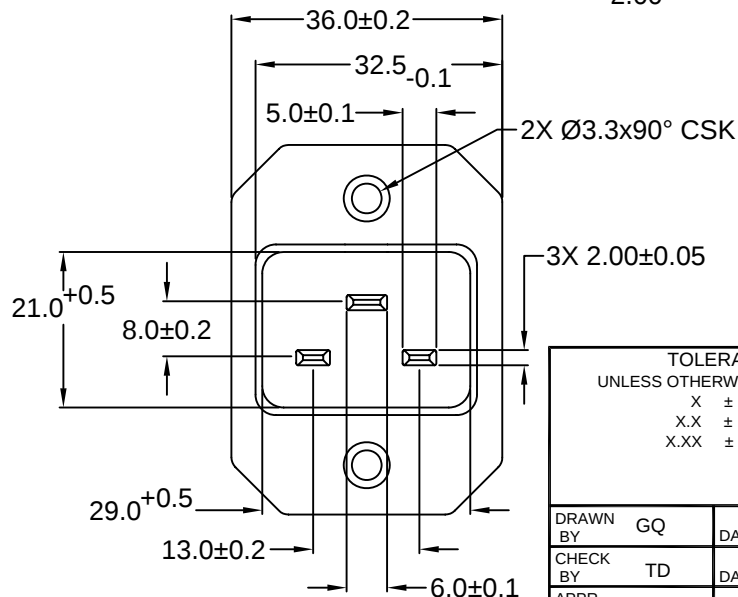
2 = 20A 250V 155°C

2+GROUND



4 = 20A 250V 70°C

2 POLE

RECOMMENDED
PANEL CUTOUT

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	GQ	DATE:	08/24/01
CHECK BY	TD	DATE:	08/29/01
APPR BY	PB	DATE:	08/29/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 16/20A IEC 60320 APPL. INLET; SOLDER
TERMINALS; CROSS FLANGE, PANEL MOUNTPART #: **42R08-2X2X**SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
A	1/8/10	TERM. DIM.	PB		

6

5

4

3

2

1