

**HID & SYSTEM MANAGEMENT PRODUCTS, SYSTEM MANAGEMENT FAMILY PRELIMINARY**
**DESCRIPTION**

The USB-Adapt™ SH3301 is a single IC that converts PS/2 keyboard and mouse data to USB 1.1.

The USB-Adapt™ is ideal for system legacy support, enabling seamless connection of standard PS/2 devices (mice or keyboards) to USB.


The IC offers two hot-pluggable and hot-swappable PS/2 ports; either port can accept a mouse or a keyboard. In addition, the USB-Adapt™ auto-detects and transparently supports the wheel function of wheel mice.

**FEATURES**

- Interfaces PS/2 devices to USB
- Complies with USB 1.1 specification
- Provides two PS/2 ports
- PS/2 ports support mouse wheel functionality
- Works with standard Windows keyboard and mouse drivers
- Devices are hot-pluggable
- PS/2 ports are auto-selectable and hot-swappable – a mouse or keyboard can be used in either port
- Easy to implement
- Few external components required


**APPLICATIONS**

- System legacy support

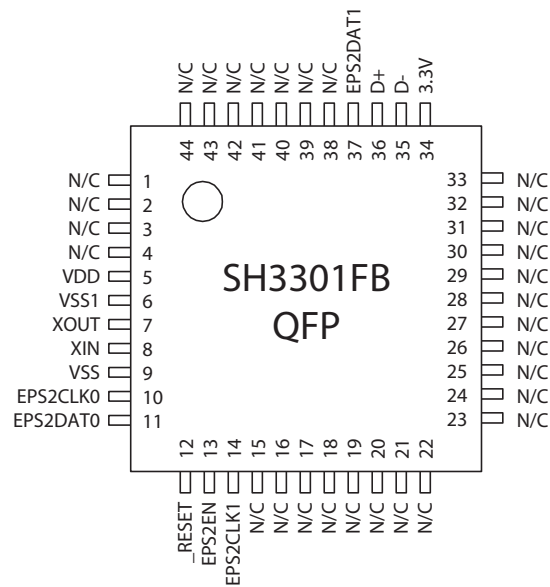**PIN ASSIGNMENTS**


**ORDERING CODE**

<b>Package options</b>	<b>Pitch</b>	<b>TA = -20°C to +85°C</b>
44-pin QFP	0.8 mm	SH3301FB
<b>Other Materials</b>	<b>Type</b>	<b>Order number</b>
USB-Adapt™ eval. kit	Evaluation kit	EVK-SH3301

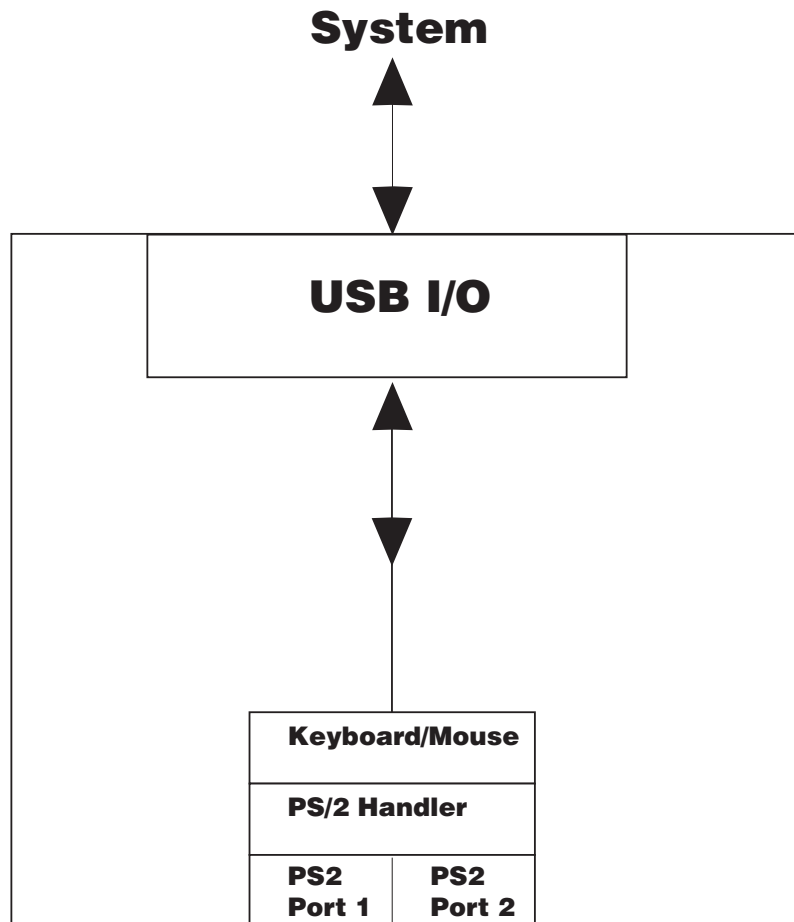**BLOCK DIAGRAM**




## USB FUNCTIONALITY

The USB-Adapt™ is a low-speed composite USB 1.1 device that interfaces PS/2. It supports the USB Human Interface Devices (HID) class specification. It uses two interrupt endpoints for the PS/2 devices.


The USB-Adapt™ handles the merging of all this data, and sends the data to the host system.

## PS/2 PORTS



The two PS/2 ports allow the user to connect legacy PS/2 devices to the USB host system. Standard 104-key keyboards and PS/2 mice, with support for MouseWheel functionality, can be hot-plugged at either of the PS/2 ports and immediately begin communicating with the host.

## PIN DEFINITIONS

Mnemonic	QFP	Type	Name and Function
<b>Power Supply</b>			
VDD	5	PWR	<b>Positive supply voltage</b>
VSS	9	PWR	<b>Ground:</b> negative supply voltage
VSS1	6	PWR	<b>Ground:</b> negative supply voltage
<b>Reset</b>			
_RESET	12	I	<b>Controller hardware reset pin:</b> Active-low reset line
<b>Oscillator pins</b>			
XIN	8	I	<b>Oscillator input:</b> input signal from oscillator
XOUT	7	O	<b>Oscillator output:</b> output signal to oscillator
<b>USB</b>			
3.3V	34	O	<b>USB reference voltage</b>
D+	36	I/O	<b>USB D+ line</b>
D-	35	I/O	<b>USB D- line</b>
<b>PS/2</b>			
EPS2CLK0	10	I/O	<b>Clock line</b> for external PS/2 port 0
EPS2DAT0	11	I/O	<b>Data line</b> for external PS/2 port 0
EPS2CLK1	14	I/O	<b>Clock line</b> for external PS/2 port 1
EPS2DAT1	37	I/O	<b>Data line</b> for external PS/2 port 1
EPS2EN	13	O	<b>Enable</b> external PS/2 ports
<b>Not connected</b>			
	1-4, 15-33, 38-44		<b>Not used</b>

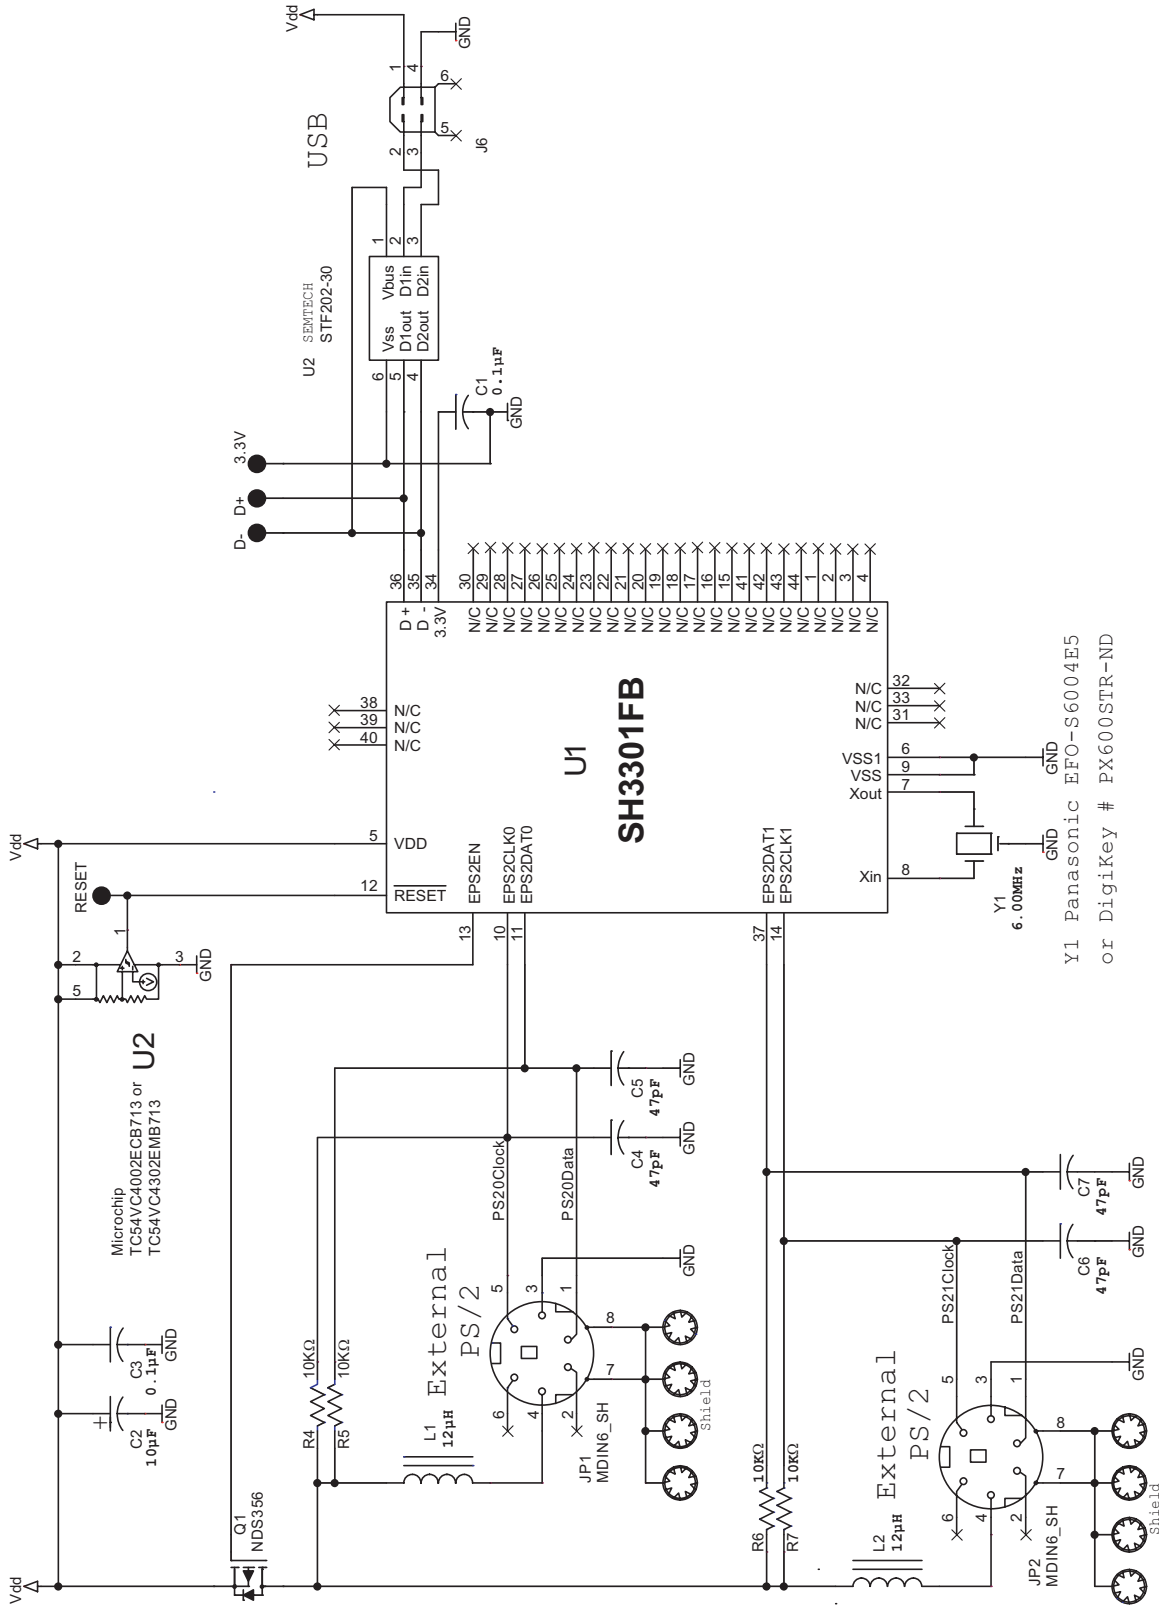

Y1 Panasonic EFO-S6004E5  
or DigiKey # PX600STR-ND

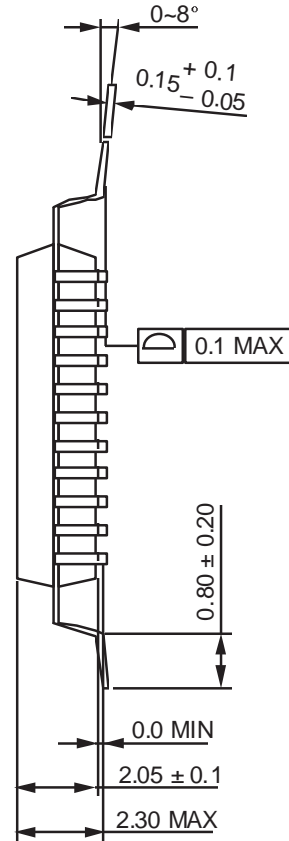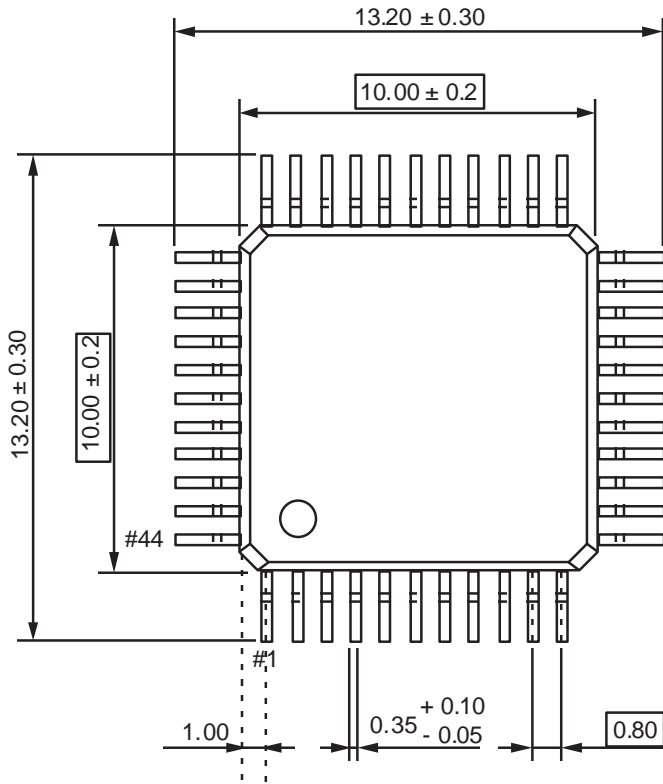



## ELECTRICAL SPECIFICATIONS

### Absolute Maximum Ratings

Ratings	Symbol	Value	Unit
Supply voltage	V <sub>DD</sub>	-0.3 to 6.5	V
Input and output voltage	V <sub>IN</sub> , V <sub>OUT</sub>	-0.3 to V <sub>DD</sub> +0.3	V
Current Drain per Pin (not including V <sub>SS</sub> or V <sub>DD</sub> )	I	20	mA
Operating Temperature SH3301	T <sub>A</sub>	T low to T high -40 to +85	°C
Storage Temperature Range	T <sub>STG</sub>	-65 to +150	°C
<b>ESD rating</b> (human body model)	V <sub>ESD</sub>	2.0	KV

### DC Electrical Characteristics (T<sub>A</sub> = -40°C to +85°C, V<sub>DD</sub> = 4.0 V to 5.25V)

Characteristic	Symbol	Min	Typ	Max	Unit
Supply voltage	V <sub>DD</sub>	4.0	5.0	5.25	V
Input high voltage					
■ high	V <sub>IH</sub>	0.8 x V <sub>DD</sub>		V <sub>DD</sub>	V
■ low	V <sub>IL</sub>	V <sub>SS</sub>		0.2 x V <sub>DD</sub>	V
Output voltage (except D-, D+)					
■ high (I <sub>OH</sub> =-200µa)	V <sub>OH</sub>	V <sub>DD</sub> -1.0			V
■ low (I <sub>OL</sub> =1ma)	V <sub>OL</sub>			0.4	
Output low current (V <sub>OL</sub> =3V, only pins38, 39, 67)	I <sub>OL</sub>	8	15	23	mA
Input leakage current					
■ high (all inputs except XIN, XOUT, RESET, D+, D-)	I <sub>LIH1</sub>			3	µA
■ high (XIN, XOUT, RESET)	I <sub>LIH2</sub>			20	µA
■ low (all inputs except XIN, XOUT, RESET, D+, D-)	I <sub>LIL1</sub>			-3	µA
■ low (XIN, XOUT, RESET)	I <sub>LIL2</sub>			-20	µA
Output leakage current (all I/O pins and output pins except D+, D-)					
■ high	I <sub>LOH1</sub>			3	µA
■ low	I <sub>LOL</sub>			-3	µA
Supply current					
■ Normal operation mode	I <sub>DD1</sub>		5.5	12	mA
■ Idle mode	I <sub>DD2</sub>		2.2	5	mA
■ Stop mode	I <sub>DD3</sub>		180	300	µA

### Control Timing (T<sub>A</sub> = -40°C to +85°C, V<sub>DD</sub> = 4.0 V to 5.25V)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency of Operation					
■ Crystal Option	f <sub>osc</sub>		6.0		MHz
■ External Clock Option	f <sub>osc</sub>		6.0		MHz



This Page Left Intentionally Blank



**For sales information  
and product literature,  
contact:**

Semtech Corporation  
Human Interface Device (HID)  
and System Management Division  
200 Flynn Road  
Camarillo, CA 93012-8790  
**sales@semtech.com**  
**<http://www.semtech.com/>**  
(805)498-2111 Telephone  
(805)498-3804 Fax

Copyright ©1999-2002 Semtech Corporation. All rights reserved.  
USB-Adapt is a trademark of Semtech Corporation. Semtech is a  
registered trademark of Semtech Corporation. All other  
trademarks belong to their respective companies.

**INTELLECTUAL PROPERTY DISCLAIMER**

This specification is provided "as is" with no warranties whatsoever including any warranty of merchantability, fitness for any particular purpose, or any warranty otherwise arising out of any proposal, specification or sample. A license is hereby granted to reproduce and distribute this specification for internal use only. No other license, expressed or implied to any other intellectual property rights is granted or intended hereby. Authors of this specification disclaim any liability, including liability for infringement of proprietary rights, relating to the implementation of information in this specification. Authors of this specification also do not warrant or represent that such implementation(s) will not infringe such rights.