

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A



Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:42R32-2

1	2	3
---	---	---

1) COLOR

1 = BLACK

2 = GRAY

2) TERMINAL OPTIONS

1 = .187(4.8)

2 = .250(6.3)

3) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C

2+GROUND



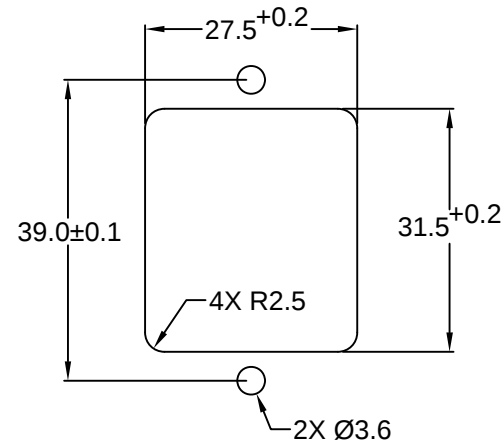
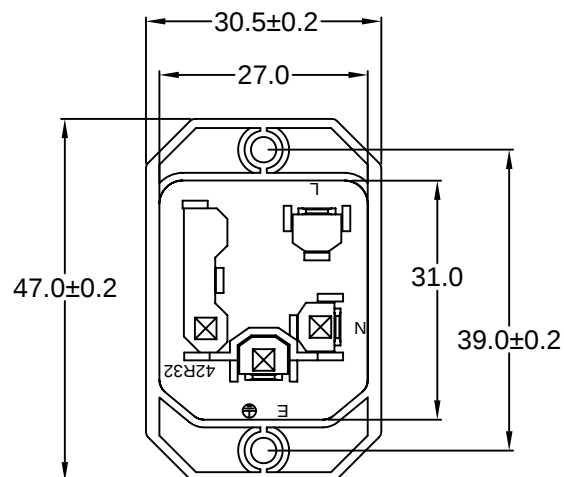
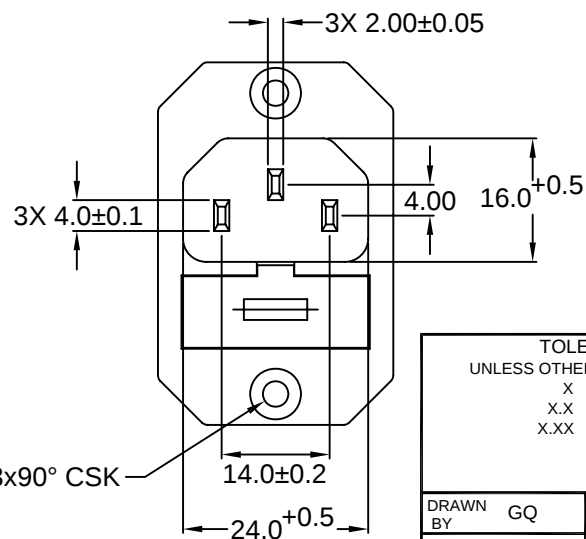
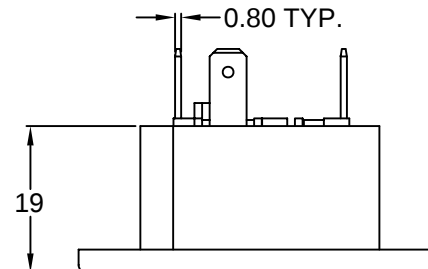
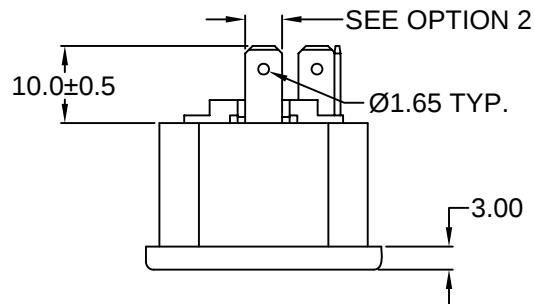
2 = 10A 250V 120°C

2+GROUND



4 = 10A 250V 70°C

2 POLE

**RECOMMENDED
PANEL CUTOUT****RoHS
COMPLIANT****TOLERANCE
UNLESS OTHERWISE SPECIFIED**

X	±	1
X.X	±	0.4
X.XX	±	0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 SINGLE FUSE HOLDER APPL. INLET;
QUICK CONNECT TERMINALS; CROSS FLANGE

DRAWN BY	GQ	DATE:	09/09/01
CHECK BY	TD	DATE:	09/09/01
APPR BY	PB	DATE:	09/09/01

PART #: **42R32-2XXX****SHEET
1 of 1**SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHNG CHECK APPR

CHANGE

REV DATE

6

5

4

3

2

1