

6

5

4

3

2


1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Copper, Tin plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

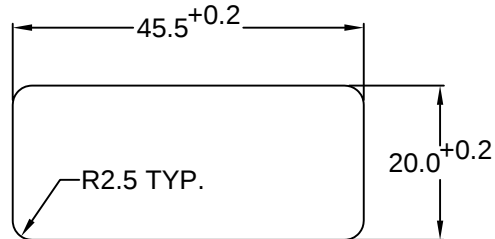

RECOMMENDED
PANEL CUTOUT

ORDERING CODE:

42R34-3 $\frac{2}{1}$ - $\frac{2}{2}$ - $\frac{1}{3}$

1) COLOR

1 = BLACK
2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION


1 = 10A 250V 70°C
2+GROUND






2 = 10A 250V 120°C
2+GROUND



4 = 10A 250V 70°C
2 POLE

**3) PANEL THICKNESS**

REPLACE WITH
CORRESPONDING
PANEL THICKNESS

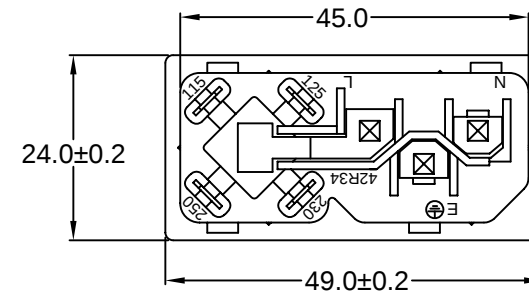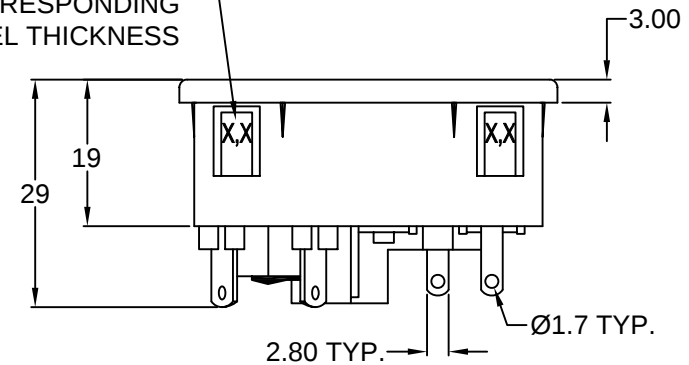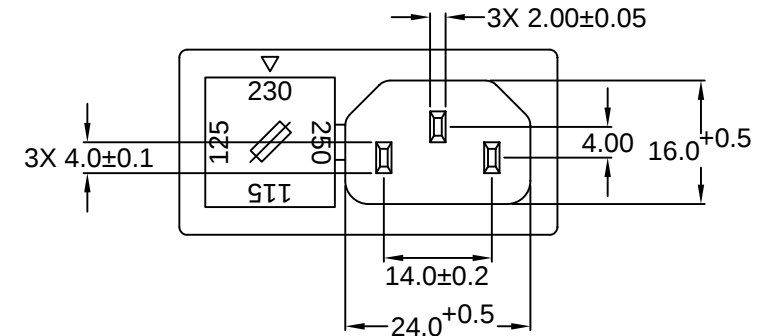

RoHS
COMPLIANT

REVISIONS

CHANGE

DATE

REV

CHNG

CHK

APPR

P/N	A	MAX. PANEL THICKNESS
42R34-3X2X-150	1.5	1.5
42R34-3X2X-200	2.0	2.0
42R34-3X2X-250	2.5	2.5
ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST		

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	GQ	DATE:	09/13/01
CHECK BY	TD	DATE:	09/18/01
APPR BY	PB	DATE:	09/18/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION
FUSE HOLDER; SOLDER TERMINALS; SNAP-IN

PART #:	42R34-3X2X-XXX	SHEET	1 of 1
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	
SCALE:	NTS	REV:	