

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Copper, Tin plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A

Voltage rating: 250 VAC



Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:

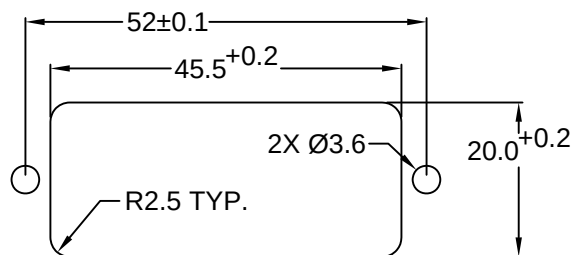
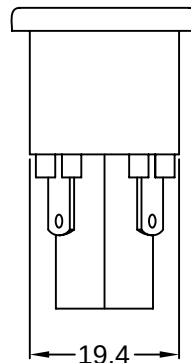
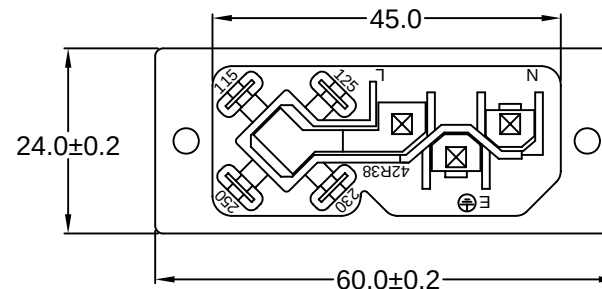
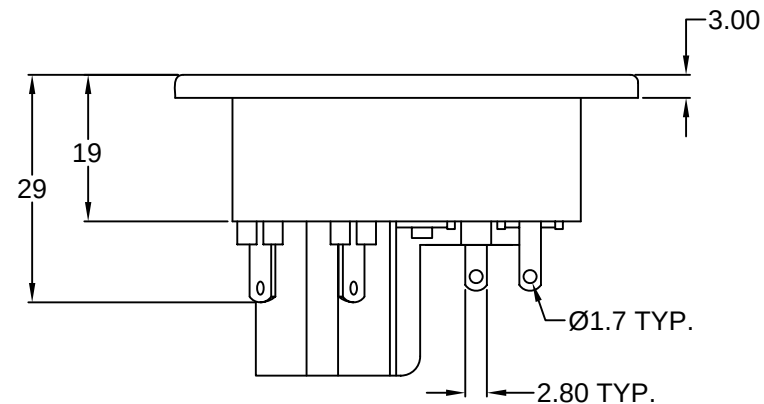
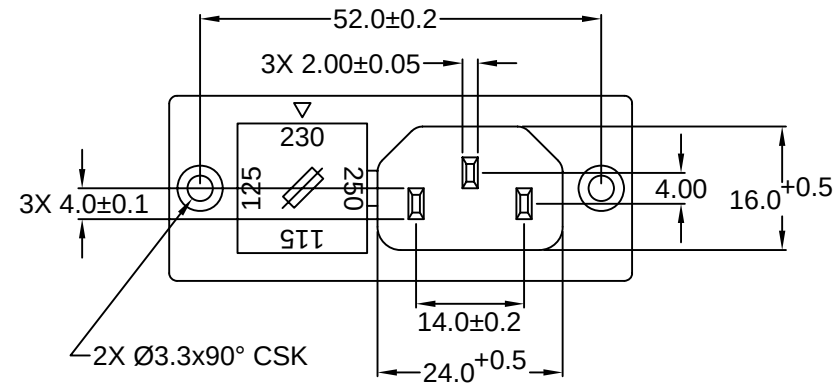
42R38-1 $\frac{2}{1}$ $\frac{2}{2}$

1) COLOR

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C
2+GROUND2 = 10A 250V 120°C
2+GROUND4 = 10A 250V 70°C
2 POLERECOMMENDED
PANEL CUTOUTRoHS
COMPLIANTTOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippary, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION
FUSE HOLDER; SOLDER TERMINALS; SCREW

PART #: 42R38-1X2X

SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHANGE

DATE

REV

CHNG

CHK

APPR

DATE

DATE

DATE

DATE

DATE