

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Copper, Tin plated

ELECTRICAL SPECIFICATIONS:

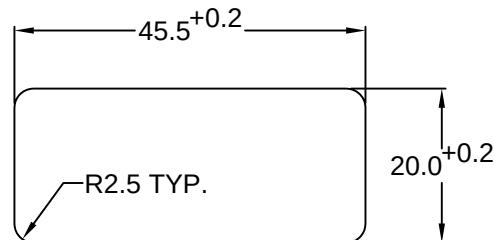
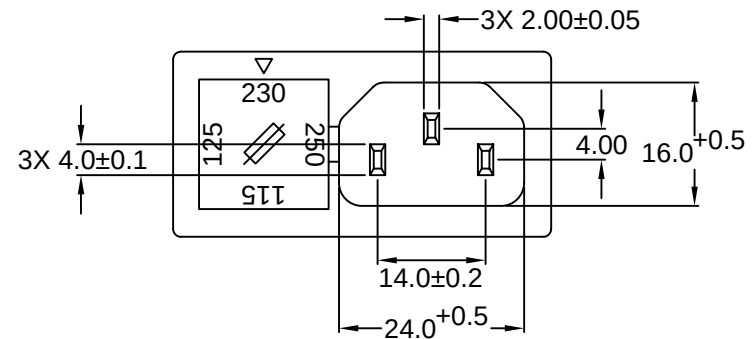
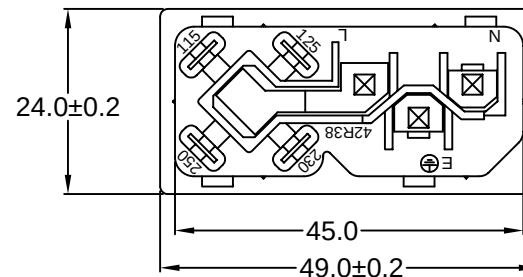
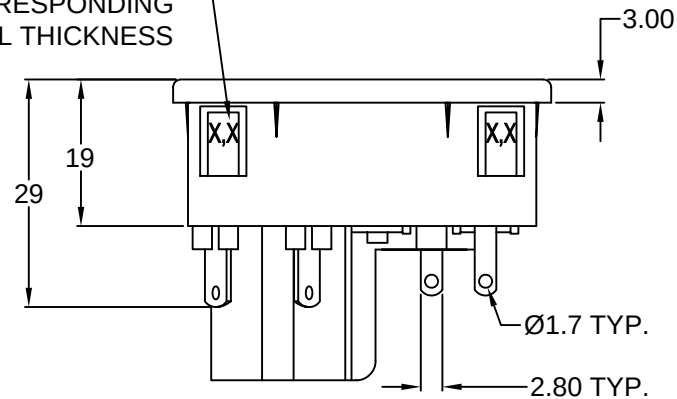
Current rating: 10 A

Voltage rating: 250 VAC



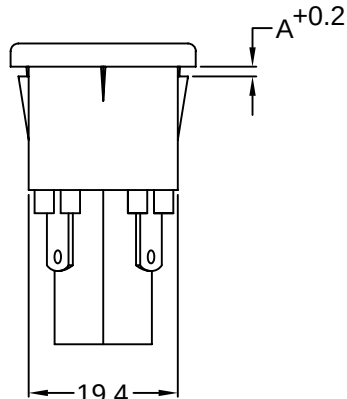
Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

**RECOMMENDED
PANEL CUTOUT**REPLACE WITH
CORRESPONDING
PANEL THICKNESS**RoHS
COMPLIANT****ORDERING CODE:**42R38-3 $\frac{2}{1}$ - $\frac{2}{2}$ - $\frac{2}{3}$ **1) COLOR**

1 = BLACK

2 = GRAY

**2) ELECTRICAL CIRCUIT
CONFIGURATION**1 = 10A 250V 70°C
2+GROUND2 = 10A 250V 120°C
2+GROUND4 = 10A 250V 70°C
2 POLE**3) PANEL THICKNESS**

P/N	A	MAX. PANEL THICKNESS
42R38-3X2X-150	1.5	1.5
42R38-3X2X-200	2.0	2.0
42R38-3X2X-250	2.5	2.5
ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST		

**TOLERANCE
UNLESS OTHERWISE SPECIFIED**X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	GQ	DATE:	09/17/01
CHECK BY	TD	DATE:	09/18/01
APPR BY	PB	DATE:	09/18/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION
FUSE HOLDER; SOLDER TERMINALS; SNAP-INPART #: **42R38-3X2X-XXX****SHEET
1 of 1**SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHANGE

DATE

REV

CHNG CHECK APPR

D

C

B

A