
Miniature SMT Power Inductor

EPA3894




- Virtually no limit on V µSec. as long as max. RMS Current Limit and Temperature Rise Limit are not exceeded
- Low loss material ensures operation in high frequency switching converters, such as Buck, Boost or as output averaging filter inductor
- Low cost Robust construction to withstand most SMT processes
- Also suitable for use in high quality filter applications

Primary Specification

Inductance (µH ± 10%) @ 0 Adc	**DCR** (Ω Max.)	**I dc** (Amps Max.)	**Test Frequency** (MHz Typ.)	**SRF MHz** (Typ.)
10	0.053	2.38	2.52	29.9

Package

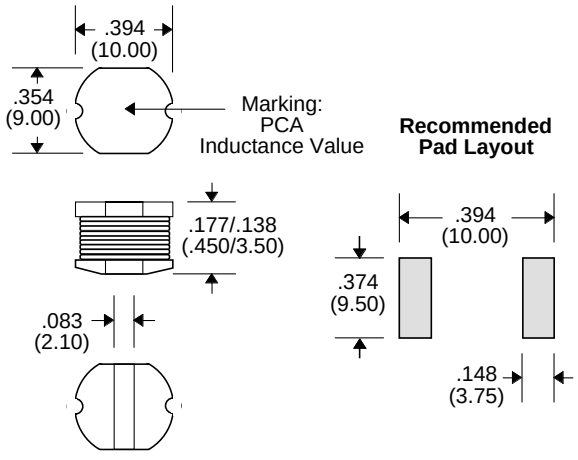

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25

PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

Product performance is limited to specific parameters. Data subject to change without prior notice.

TEL: (818) 892-0761
FAX: (818) 894-5791
http://www.pca.com