

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass

Screw: Brass, Nickel Plated over Copper

Nut: Brass, Nickel Plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A/15 A

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at
500 VDCDielectric withstanding voltage: 2000
VAC for one minute

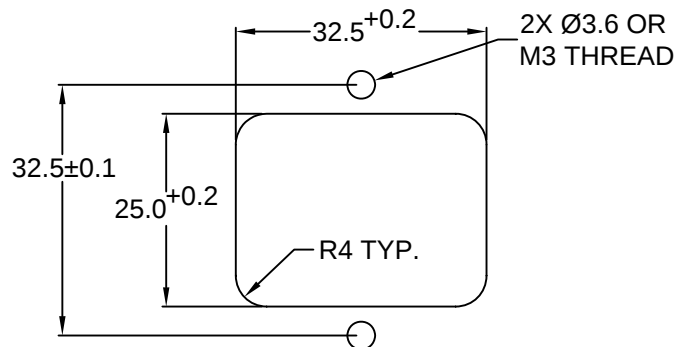
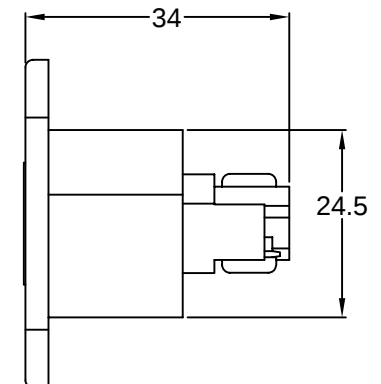
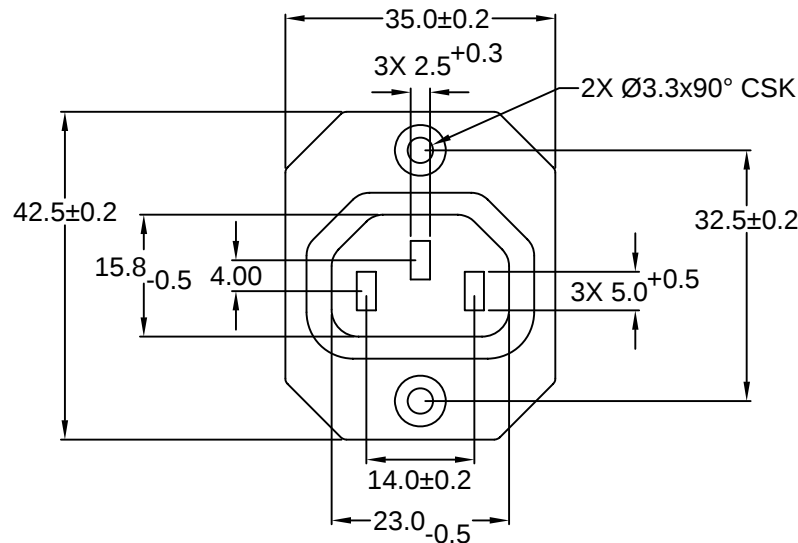
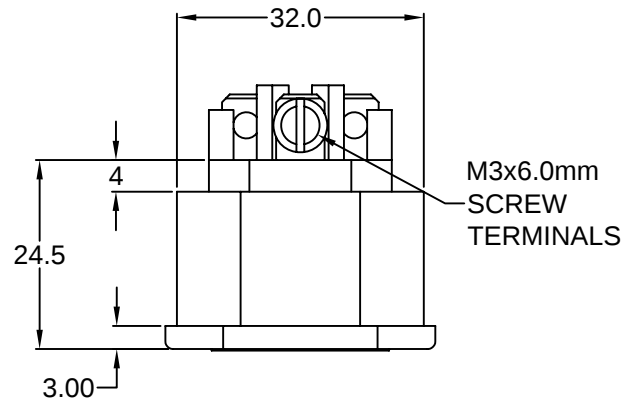
ORDERING CODE:

43R02-2 $\frac{1}{1}$ $\frac{2}{2}$

1) COLOR

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT
CONFIGURATION1 = 10A 250V 70°C 15A 250V 70°C 
2+GROUND 2 = 10A 250V 120°C 
15A 250V 120°C 
2+GROUND RECOMMENDED
PANEL CUTOUTRoHS
COMPLIANTTOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; SCREW
TERMINALS; CROSS FLANGE, PANEL MOUNT

DRAWN BY	GQ	DATE:	10/04/01
CHECK BY	TD	DATE:	10/10/01
APPR BY	PB	DATE:	10/10/01

PART #: **43R02-2X1X**SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHANGE

DATE

REV

CHNG CHECK APPR

6

5

4

3

2

1