

Monolithic crystal filter

MQF10.7-1500/25



Application

- 8 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

Limiting values

| | | Unit | Value |
|-----------------------|-------------------|------|-------------------|
| Center frequency | f_0 | MHz | 10.7 ± 500 Hz |
| Insertion loss | | dB | ≤ 3.5 |
| Pass band at 3.0 dB | | kHz | ± 7.5 |
| Ripple in pass band | $f_0 \pm 5.7$ kHz | dB | ≤ 1.0 |
| Stop band attenuation | $f_0 \pm 17$ kHz | dB | ≥ 70 |
| Alternate attenuation | | dB | > 80 |


Terminating impedance Z

| | | |
|----------|--------|---------|
| R1 C1 | Ohm/pF | 50 0 |
| R2 C2 | Ohm/pF | 50 0 |


| | | |
|-----------------------|-----|------------|
| Operating temp. range | ° C | -20... +85 |
|-----------------------|-----|------------|

Characteristics MQF10.7-1500/25


Pass band

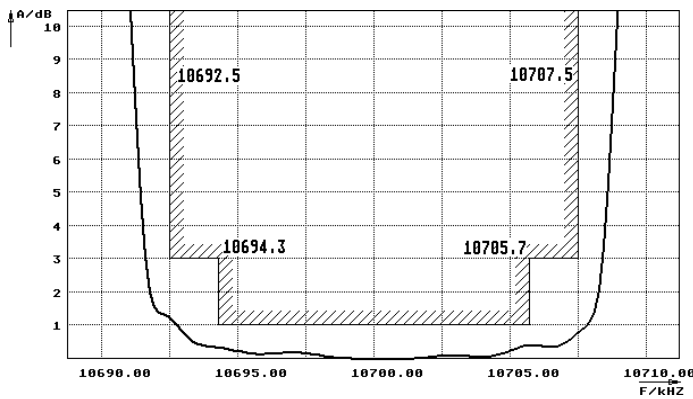

Stop band

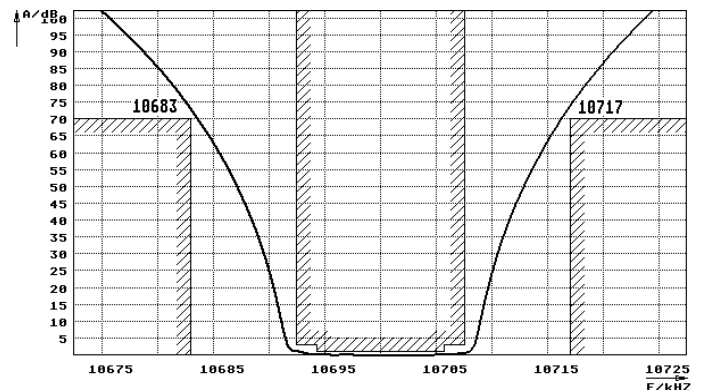

Pin connections: 1 Input
2 Input-E
3 Output
4 Output-E

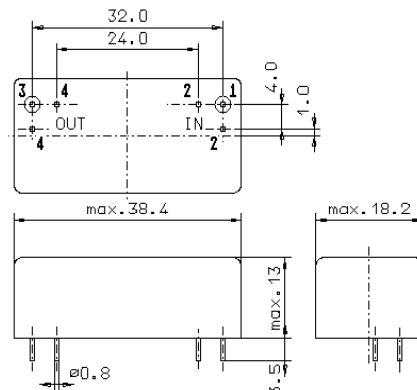

GM17