

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Tin Plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A/15 A

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at
500 VDCDielectric withstanding voltage: 2000 VAC
for one minute

ORDERING CODE:

43R04-1 1 2

1) COLOR

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT
CONFIGURATION

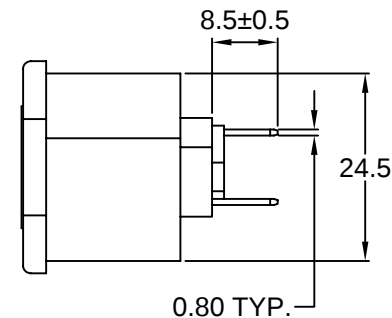
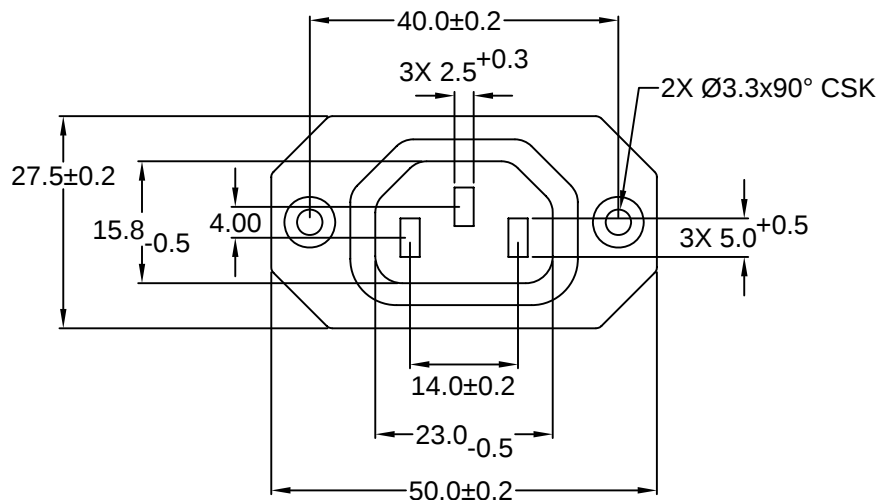
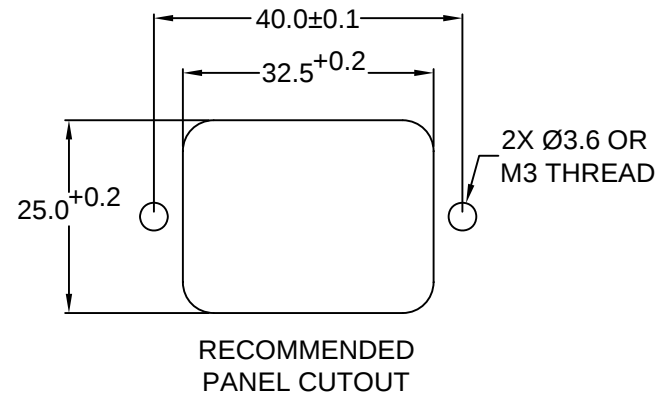
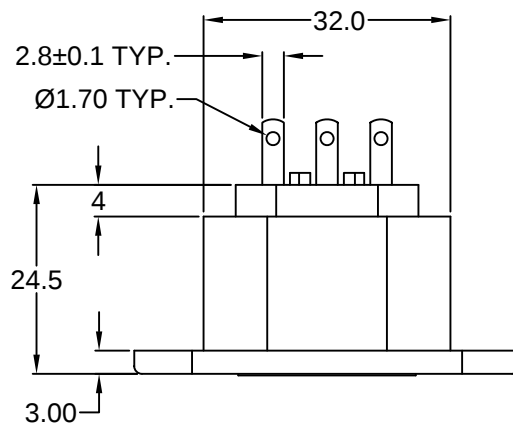
1 = 10A 250V 70°C

15A 250V 70°C
2+GROUND

2 = 10A 250V 120°C

15A 250V 120°C

2+GROUND

RoHS
COMPLIANTTOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; SOLDER
TERMINALS; SIDE FLANGE, PANEL MOUNTDRAWN BY DT DATE: 12/31/03
CHECK BY PB DATE: 1/5/04
APPR BY DATE:

PART #: 43R04-1X1X

SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHANGE

DATE

REV

CHNG CHECK APPR

6

5

4

3

2

1