

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: PC (Polycarbonate), color black,
UL-94V-0 rated

Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:

Current rating: 20 A





Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at
500 VDC

Dielectric withstanding voltage: 2000 VAC
for one minute

RoHS
COMPLIANT

GREEN ANODIZED
GND SCREW

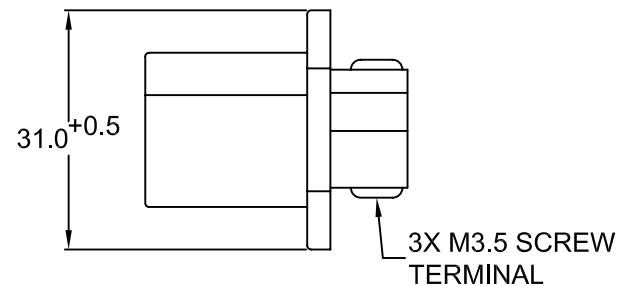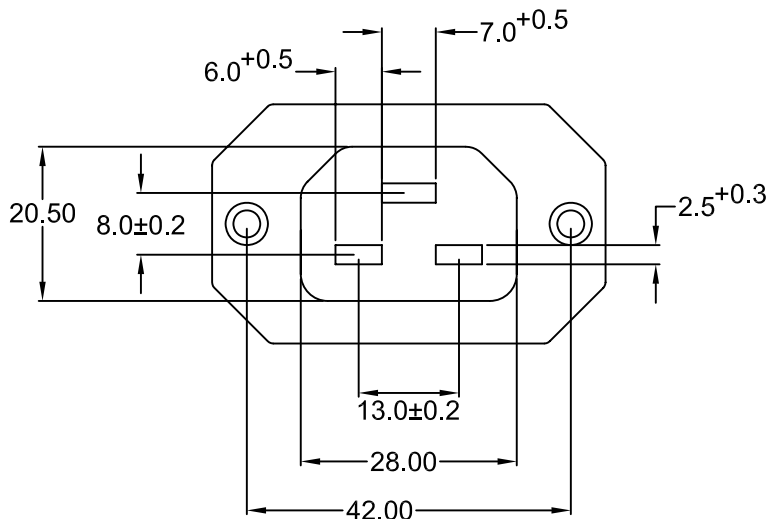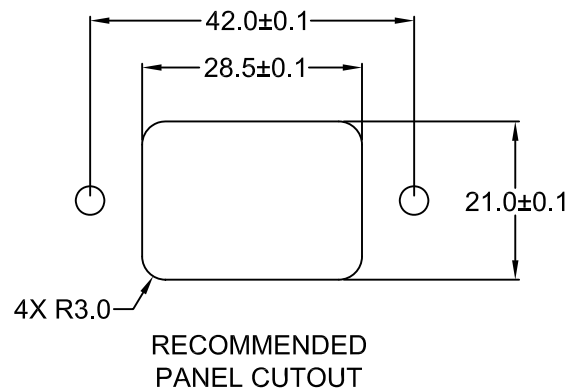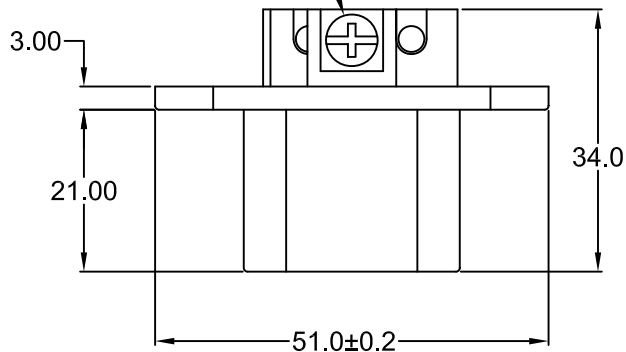

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
A	09/97	SCREW WAS 6-32	SLS		
B	04/98	UPDATED DIMENSIONS	SLS		
C	4/11/00	REVISED & UPDATE DIM	TD	PB	SS
D	11/18/01	REVISED / UPDATED	GQ	TD	PB
E	4/27/10	REVISED / UPDATED	PB		

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY AH DATE: 8/14/97
CHECK BY TD DATE: 4/27/99
APPR BY PJ DATE: 4/27/99

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 20A IEC 60320 C21 APPL. OUTLET; SCREW
TERMINALS; SIDE FLANGE, PANEL MOUNT

PART #: **43R06-2114**

SHEET
1 of 1

SIZE: A
SCALE: NTS
ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: **E**

6

5

4

3

2

1