PASTERNACK®
THE ENGINEER'S RF SOURCE



39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA

TECHNICAL DATA SHEET PE15A63002

The PE15A63002 is a Input Protected Low Noise RF coaxial amplifier operating in the 30 MHz to 1.5 GHz frequency range. The amplifier offers 1 Watt input protection, 1.6 dB typical noise figure, 22 dBm typical P1dB and high 25 dB small signal gain with gain flatness of ±0.5 dB typical. The low noise amplifier requires typically a 12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation. This low noise amplifier requires only a single positive supply, is unconditionally stable and operates over the temperature range of -55°C and 125°C.

Features

- 30 MHz to 1500 GHz Frequency Range
- 1 Watt input protection
- P1dB: 22 dBm
- High Small Signal Gain: 25 dB typical
- Gain Flatness: ±0.5 dB
- Gain Variance: ±1 dB
- Noise Figure: 1.6 dB typ
- 50 Ohm Input and Output Matched
- -55 to 125°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in Voltage Regulator

Applications

- Laboratory Applications
- R&D Labs
- Radar Systems
- Test Instrumentation
- Communication Systems
- Low Noise Amplifier
- General Purpose Amplification
- Wideband Gain Block
- IF Amplifier/RF Driver Amplifier
- RF Wideband Front Ends
- Fixed and Land Mobile

Electrical Specifications (TA = +25°C, DC Voltage = 12Vdc, DC Current = 150mA)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.03		1.5	GHz
Small Signal Gain	23.5	25	26.5	dB
Gain Flatness		±0.5	±0.75	dB
Gain Variance at OTR*		±1		dB
Output at 1 dB Compression Point	+21	+22		dBm
Output 3rd Intercept Point	+35	+39		dBm
Noise Figure		1.6	2	dB
Input VSWR		1.35:1	1.5:1	
Output VSWR		1.35:1	1.5:1	
Reverse Isolation		45		dB
Spurious			-70	dBc
Input Power (CW)			+30	dBm
Operating DC Voltage	10	12	15	Volts
Operating DC Current	140	150	180	mA
Operating Temperature Range	-40		+85	°C

*OTR= Base Plate Operating Temperature Range

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA PE15A63002

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2017 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE



39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA

TECHNICAL DATA SHEET PE15A63002

Absolute Maximum Rating

Parameter	Rating	Units
DC Voltage	+15	V
RF Input Power	+30	dBm
Storage Temperature	-55 - 125	°C
Operating Temperture	-40 - 85	°C



ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Mechanical Specifications

Size

Length	1.2 in [30.48 mm]
Width	0.85 in [21.59 mm]
Height	0.375 in [9.53 mm]
Weight	0.046 lbs [20.87 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA PE15A63002

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2017 Pasternack Enterprises All Rights Reserved


PASTERNACK®
THE ENGINEER'S RF SOURCE




39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA

TECHNICAL DATA SHEET PE15A63002

Functional Block Diagram

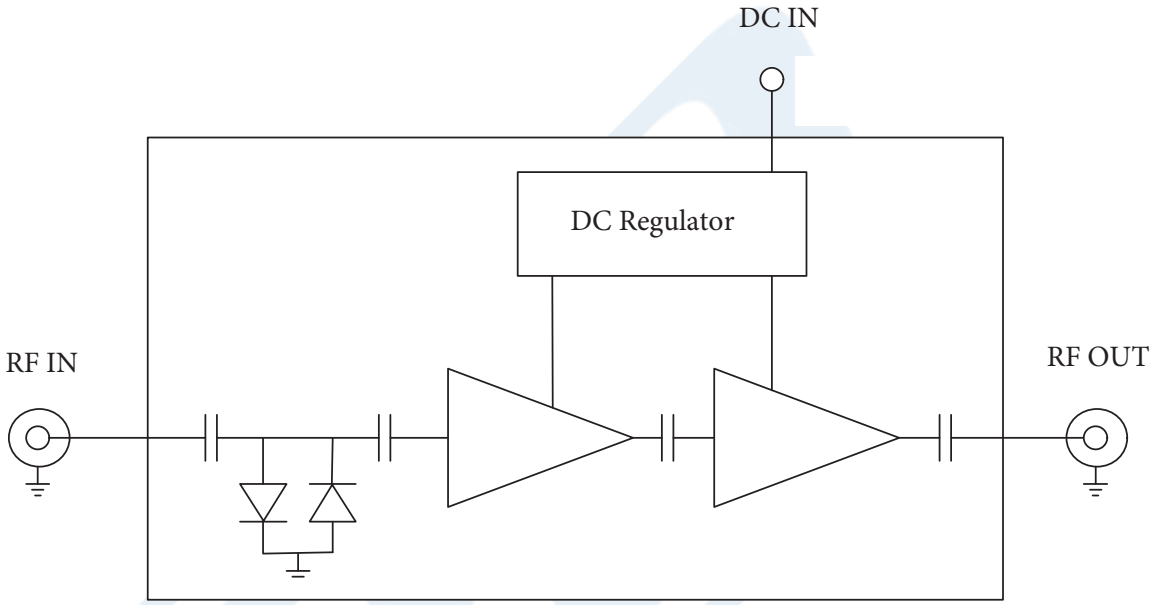

Typical Performance Data

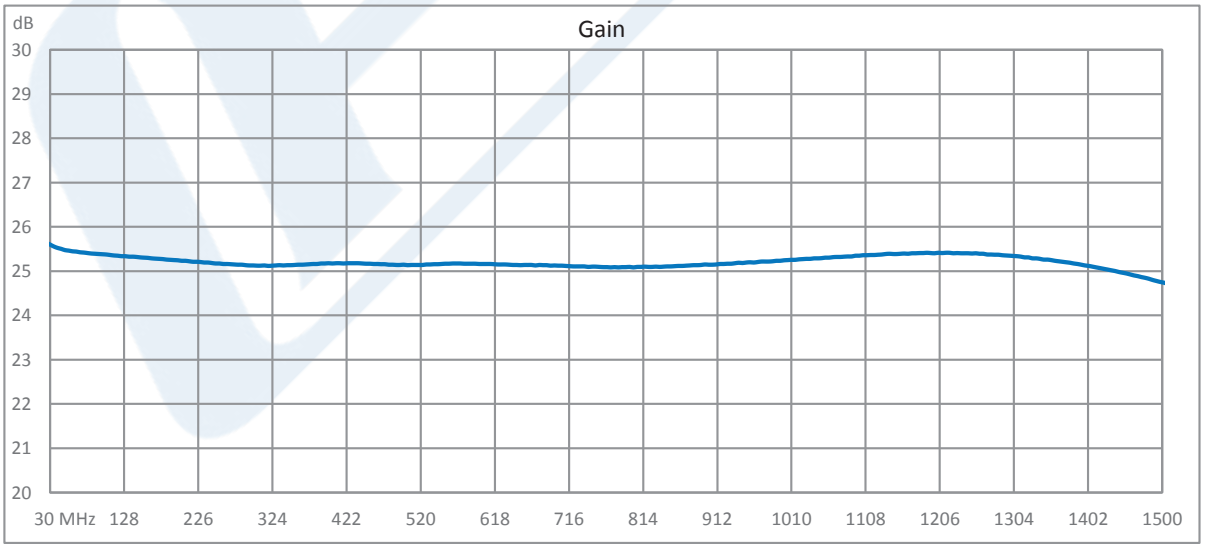

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA PE15A63002

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered


© 2017 Pasternack Enterprises All Rights Reserved


PASTERNACK®
THE ENGINEER'S RF SOURCE



39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA

TECHNICAL DATA SHEET PE15A63002

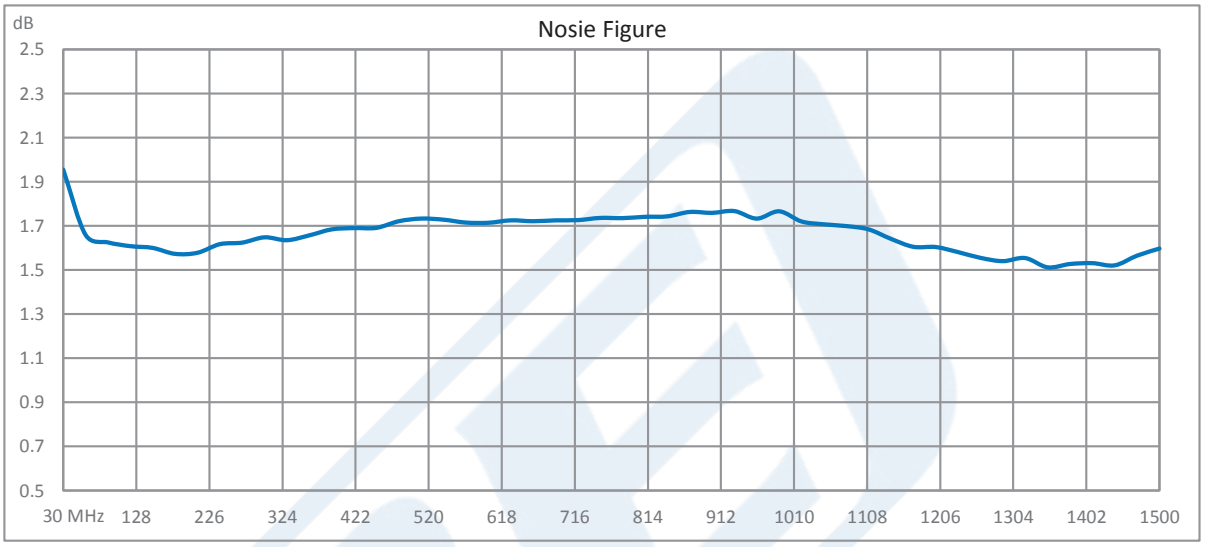

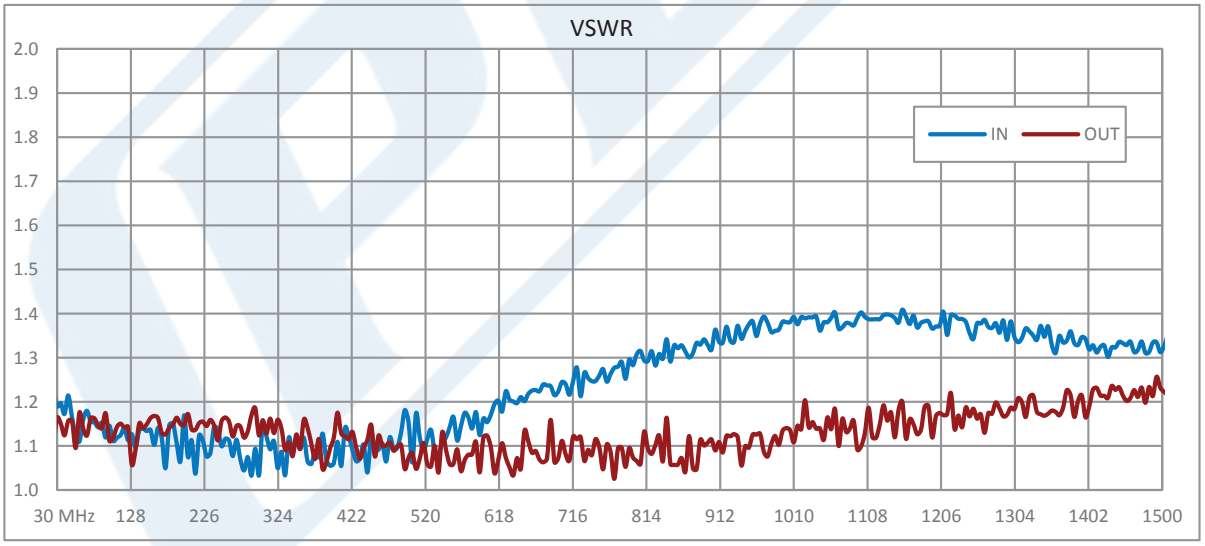

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA PE15A63002

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2017 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE



39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA

TECHNICAL DATA SHEET PE15A63002

39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz, Low Noise Amplifier, 25 dB Gain, SMA PE15A63002

URL: https://www.pasternack.com/1.6-db-1.5-ghz-low-noise-amplifier-25-db-gain-sma-pe15a63002-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2017 Pasternack Enterprises All Rights Reserved

PE15A63002 CAD Drawing

39 dBm IP3, 1.6 dB NF, 22 dBm P1dB, 30 MHz to 1.5 GHz,
Low Noise Amplifier, 25 dB Gain, SMA

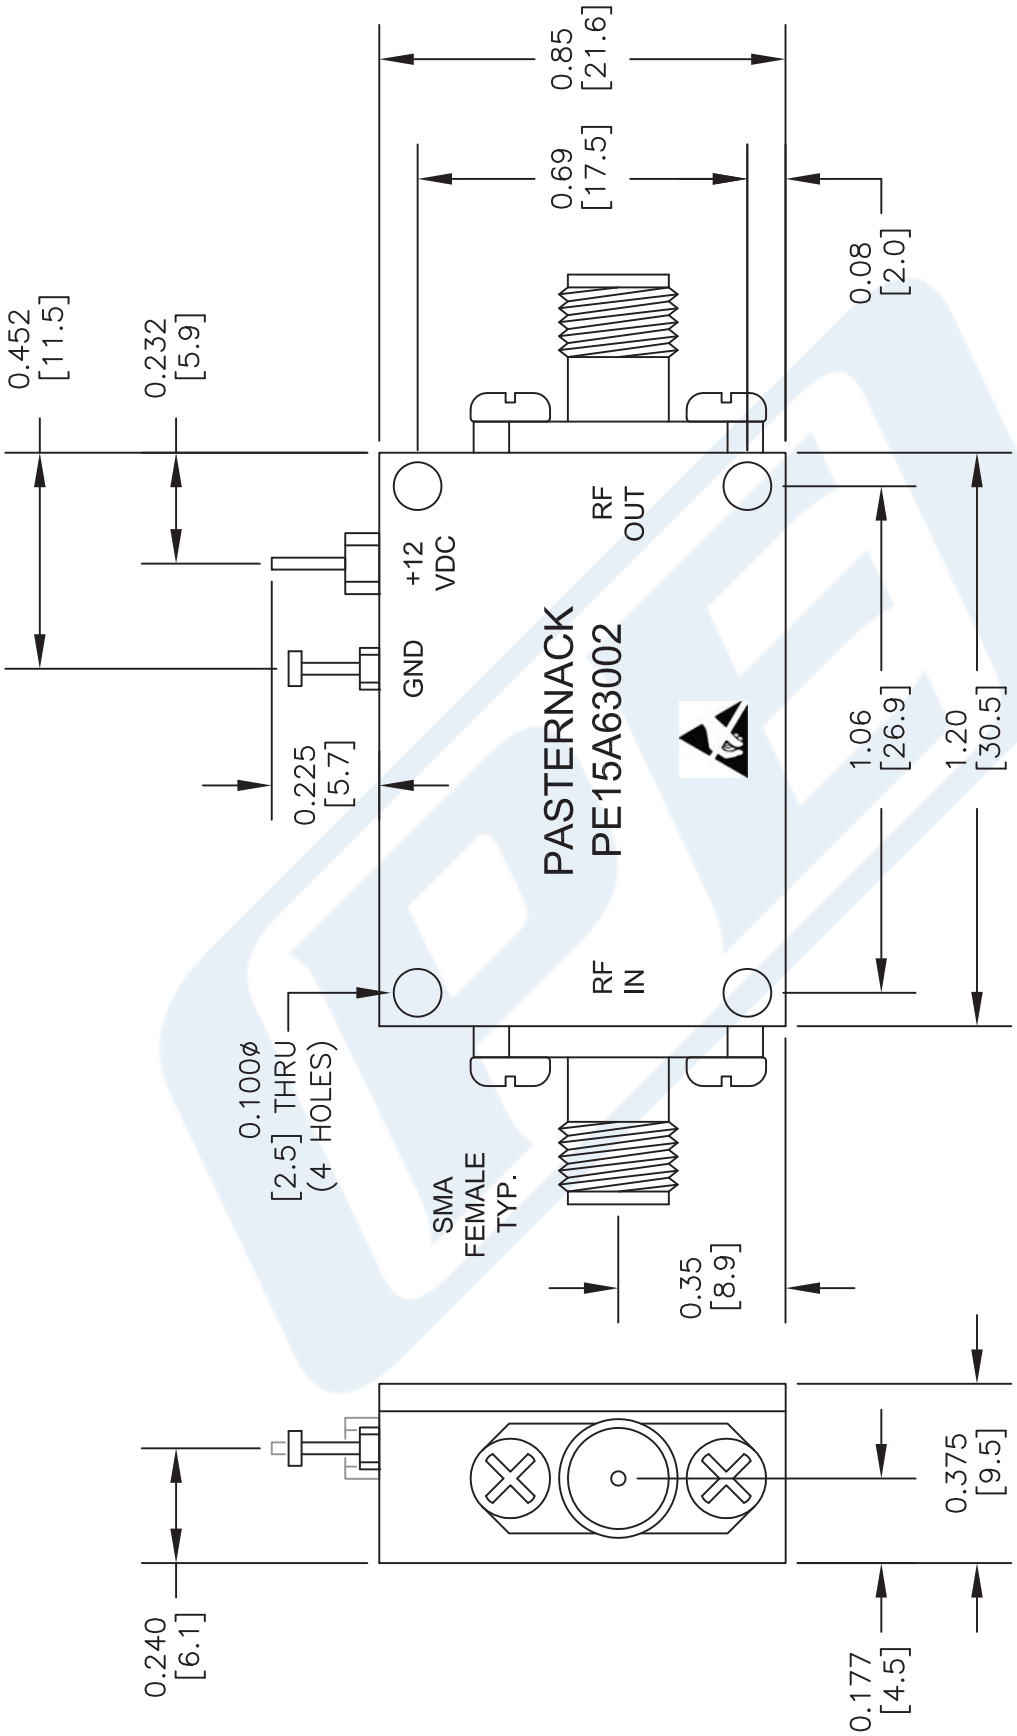

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE	071916	SCALE N/A	SIZE A	2233

DWG TITLE: **PE15A63002**

FSCM NO. 53919

PASTERNACK® THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2017 Pasternack Enterprises All Rights Reserved