

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0444281405

Status:


Active

Overview:

microfit_30

Description:

3.00mm (.118") Pitch Micro-Fit 3.0 BMI™ Header, Surface Mount Compatible, Dual Row, Right Angle, without Snap-in Plastic Peg PCB Lock, 14 Circuits, 0.38µm (15µ") Gold (Au) Selective Plating

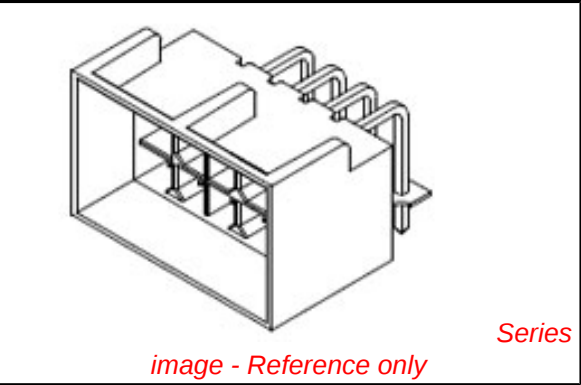

Documents:	
3D Model	Product Specification PS-44300-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
TUV	R72081037
UL	E29179
General	
Product Family	PCB Headers
Series	44428
Application	Board-to-Board, Wire-to-Board
Comments	High Temperature Square Pin Solder Type Polarized to Mating Part
Overview	microfit_30
Product Name	Micro-Fit 3.0 BMI™
Physical	
Breakaway	No
Circuits (Loaded)	14
Circuits (maximum)	14
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.138 In
PC Tail Length (mm)	3.50 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.118 In
Pitch - Mating Interface (mm)	3.00 mm
Plating min: Mating (µin)	15
Plating min: Mating (µm)	0.38
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.54

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

44428Series




Mates With

44133 , 44764 , 44769





Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	5A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-44428-001
Product Specification	PS-44300-001, RPS-44300-001
Sales Drawing	SD-44428-001

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

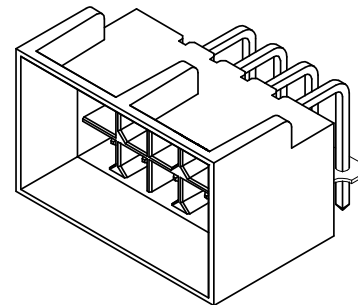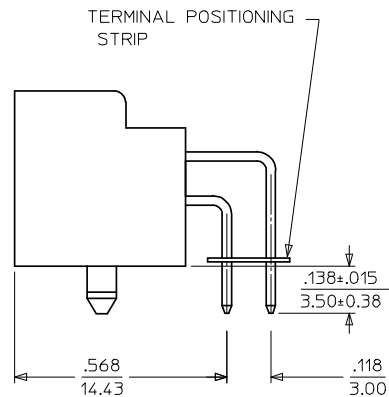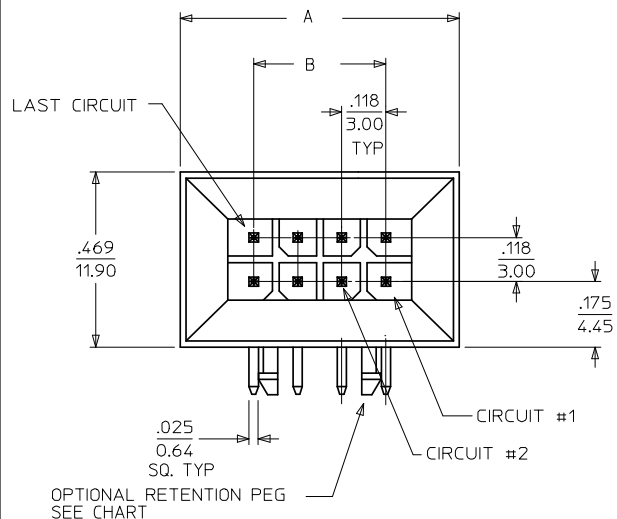

CIRCUIT SIZE	A	B	C
04	.512 13.00	.118 3.00	NA
06	.630 16.00	.236 6.00	NA
08	.748 19.00	.354 9.00	.184 4.68
10	.866 22.00	.472 12.00	.302 7.68
12	.984 25.00	.590 15.00	.420 10.68
14	1.102 28.00	.709 18.00	.539 13.68
16	1.220 31.00	.827 21.00	.657 16.68
18	1.338 34.00	.945 24.00	.775 19.68
20	1.457 37.00	1.063 27.00	.893 22.68
22	1.575 40.00	1.181 30.00	1.011 25.68
24	1.693 43.00	1.299 33.00	1.129 28.68

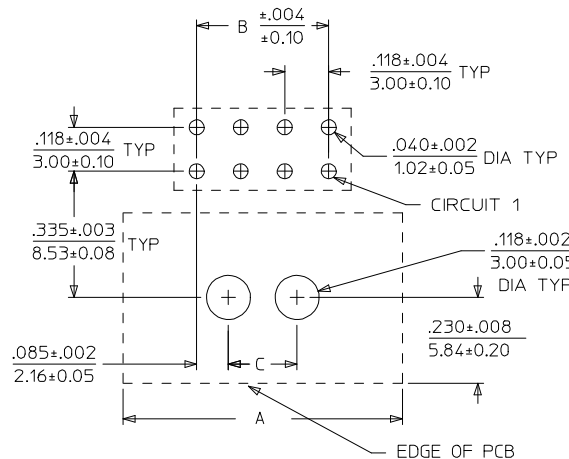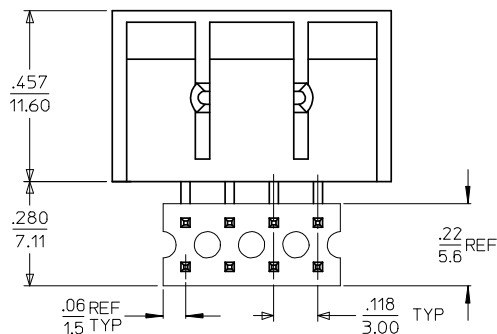

PCB LAYOUT:
COMPONENT SIDE
4 CIRCUIT ONLY

PCB LAYOUT:
COMPONENT SIDE
6 CIRCUIT ONLY

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS .062/1.57
8 THRU 24 CIRCUITS

NOTES :

- MATERIALS -
HOUSING : NYLON , GLASS-FILLED, UL94V-0 COLOR - BLACK
TERMINAL : BRASS ALLOY
TERMINAL POSITIONING STRIP : MYLAR, COLOR - NATURAL
- FINISH:
A= .000200/(0.00508) MIN. TIN OVER .000050/(0.00127) MIN. NICKEL.
B= .000015/(0.00038) MIN. SELECT GOLD IN CONTACT AREA,
.000100/(0.00254) MIN. MATTE TIN ON SOLDER TAILS,
BOTH OVER .000050/(0.00127) MIN. NICKEL.
C= .000030/(0.00076) MIN. SELECT GOLD IN CONTACT AREA,
.000100/(0.00254) MIN. MATTE TIN ON SOLDER TAILS,
BOTH OVER .000050/(0.00127) MIN. NICKEL.
- * THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC." CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN/LEAD IN THE PC TAIL AREA.
- PRODUCT SPECIFICATION : PS-44300-001
- PACKAGING SPECIFICATION : PK-44428-001
- THIS ASSEMBLY MATES WITH MOLEX BMI PANEL MOUNT RECEPTACLE (SEE DRAWING SD-44133-001) WITH FEMALE CRIMP TERMINAL (SEE DRAWING SD-43030-****) AND BMI RECEPTACLE HEADERS (SEE DRAWING SD-44764-001 OR SD-44769-001).
- THIS PART CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

CORRECT .230 DIM. EC NO: UCP2008-0675 DRAWN:KIPPER 2007/12/12 CHKD:SSOUSEK 2007/12/14 APPR:FSM/TH 2007/12/14	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
				IN/MM		4:1	METRIC	◎ □ ANGLE			
				mm	INCH	TITLE MICRO FIT (3.0) DUAL ROW RIGHT ANGLE BMI HEADER ASS'Y MOLEX INCORPORATED		DOCUMENT NO. SD-44428-001	SHEET NO. 1 OF 2		
				4 PLACES ±---	±---					DRAWN BY	DATE
				3 PLACES ±---	±.010					CHECKED BY	DATE
				2 PLACES ±0.25	±.015					MUELLER	1999/11/29
				1 PLACE ±0.38	±---					APPROVED BY	DATE
				ANGULAR ±1/2°		EDGLEY	1999/11/30	MOLEX			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SEE CHART			
						SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
C											

	13	12	11	10	9	8	7	6	5	4	3	2	1		
J	MATERIAL NUMBER	NUMBER OF CIRCUITS	FINISH OPTION	RETENTION PEG OPTION	MATERIAL NUMBER	NUMBER OF CIRCUITS	FINISH OPTION	RETENTION PEG OPTION	POLARIZATION LAYOUT 4-24 CIRCUITS 4 CIRCUIT 24 CIRCUIT 6 CIRCUIT 22 CIRCUIT 8 CIRCUIT 20 CIRCUIT 10 CIRCUIT 18 CIRCUIT 12 CIRCUIT 16 CIRCUIT 14 CIRCUIT						I
H	44428-0401	04	A	YES	44428-1601	16	A	YES							H
G	44428-0402	04	B	YES	44428-1602	16	B	YES							G
F	44428-0403	04	C	YES	44428-1603	16	C	YES							F
E	44428-0404	04	A	NO	44428-1604	16	A	NO							E
D	44428-0405	04	B	NO	44428-1605	16	B	NO							D
C	44428-0406	04	C	NO	44428-1606	16	C	NO	C						
B	44428-0601	06	A	YES	44428-1801	18	A	YES	B						
A	44428-0602	06	B	YES	44428-1802	18	B	YES	A						
	44428-0603	06	C	YES	44428-1803	18	C	YES							
	44428-0604	06	A	NO	44428-1804	18	A	NO							
	44428-0605	06	B	NO	44428-1805	18	B	NO							
	44428-0606	06	C	NO	44428-1806	18	C	NO							
	44428-0801	08	A	YES	44428-2001	20	A	YES							
	44428-0802	08	B	YES	44428-2002	20	B	YES							
	44428-0803	08	C	YES	44428-2003	20	C	YES							
	44428-0804	08	A	NO	44428-2004	20	A	NO							
	44428-0805	08	B	NO	44428-2005	20	B	NO							
	44428-0806	08	C	NO	44428-2006	20	C	NO							
	44428-1001	10	A	YES	44428-2201	22	A	YES							
	44428-1002	10	B	YES	44428-2202	22	B	YES							
	44428-1003	10	C	YES	44428-2203	22	C	YES							
	44428-1004	10	A	NO	44428-2204	22	A	NO							
	44428-1005	10	B	NO	44428-2205	22	B	NO							
	44428-1006	10	C	NO	44428-2206	22	C	NO							
	44428-1201	12	A	YES	44428-2401	24	A	YES							
	44428-1202	12	B	YES	44428-2402	24	B	YES							
	44428-1203	12	C	YES	44428-2403	24	C	YES							
	44428-1204	12	A	NO	44428-2404	24	A	NO							
	44428-1205	12	B	NO	44428-2405	24	B	NO							
	44428-1206	12	C	NO	44428-2406	24	C	NO							
	44428-1401	14	A	YES											
	44428-1402	14	B	YES											
	44428-1403	14	C	YES											
	44428-1404	14	A	NO											
	44428-1405	14	B	NO											
	44428-1406	14	C	NO											
									SEE SHEET 1 EC NO: UCP2007-0836 DRWN:K1PPER CHKD:SSOUSEK APPR:FSM TH 2006/10/04 2006/10/04 2006/10/05 DESCRIPTION REV QUALITY SYMBOLS GENERAL TOLERANCES (UNLESS SPECIFIED) DIMENSION STYLE SCALE DESIGN UNITS THIRD ANGLE PROJECTION DRAWN BY DATE CHECKED BY DATE APPROVED BY DATE MATERIAL NO. DOCUMENT NO. SHEET NO. DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS SIZE THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						B
									MICRO FIT (3.0) DUAL ROW RIGHT ANGLE BMI HEADER ASS'Y MOLEX INCORPORATED SD-44428-001 2 OF 2						A