


Series 346 / 446

PCB connectors 2.54 mm

Single row / Double row

Press-fit

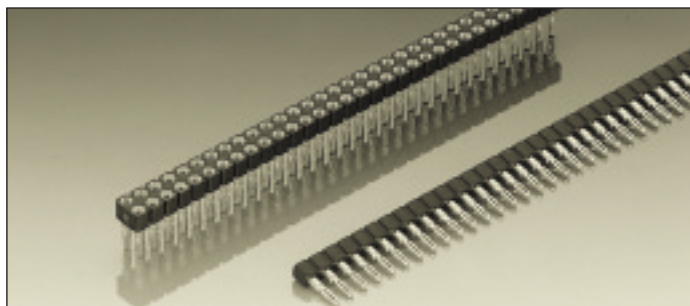

Receptacles, press-fit

For solderless mount into PCB, plated-thru holes, for pins $\varnothing$ 0.40–0.56 mm



For corresponding pin connectors see pages 43 to 46


New version with modified eye of the needle pin

Ordering information

Replace **xx** with the number of poles, e.g. 346-93-1xx-41-035 for a single row version with 8 pins becomes:
346-93-108-41-035

(Older versions 346/446-...-41-012/013/019 please consult)

Platings	Sleeve	Clip	Pin
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

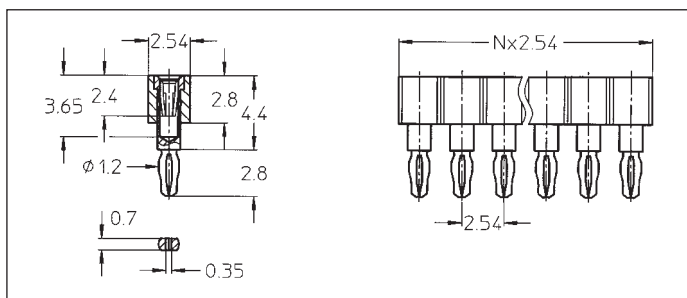

346-91-1xx-41-036


346-93-1xx-41-036

346-99-1xx-41-036

Press-fit receptacle connector:
single row, compliant pin
for plated-thru hole
 $\varnothing$ 1 (+0.09/–0.06) mm

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

For PCB thickness 1.5 to 2.0 mm

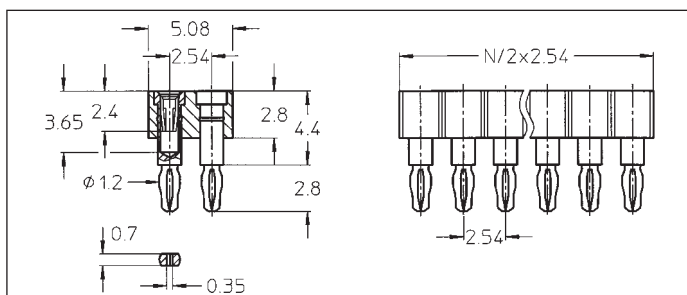

446-91-2xx-41-036


446-93-2xx-41-036

446-99-2xx-41-036

Press-fit receptacle connector:
double row, compliant pin
for plated-thru hole
 $\varnothing$ 1 (+0.09/–0.06) mm

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

For PCB thickness 1.5 to 2.0 mm

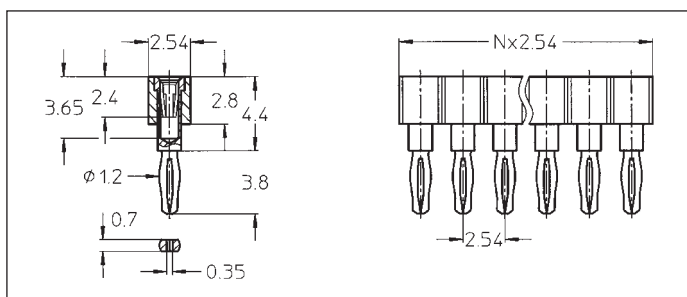

346-91-1xx-41-035


346-93-1xx-41-035

346-99-1xx-41-035

Press-fit receptacle connector:
single row, compliant pin
for plated-thru hole
 $\varnothing$ 1 (+0.09/–0.06) mm

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

For PCB thickness 2.1 to 3.2 mm

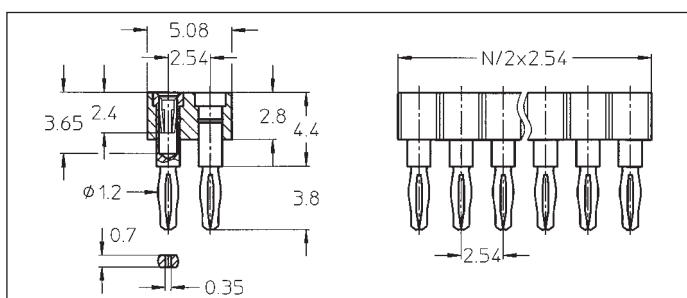

446-91-2xx-41-035

446-93-2xx-41-035

446-99-2xx-41-035

Press-fit receptacle connector:
double row, compliant pin
for plated-thru hole
 $\varnothing$ 1 (+0.09/–0.06) mm

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

For PCB thickness 2.1 to 3.2 mm