CAMBION â

Technical Data Sheet

Wearnes Cambion LTD
Castleton, Hope Valley, Derbyshire, S33 8WR, England
Telephone: +44(0)1433 621555 Fax: +44(0)1433 621290
Web: www.cambion.com Email: enquiries@cambion.com

450-3379 Swage mount socket, for .040 (1,02) diameter pins

(with slotted solder terminal tail)

Recommended mounting hole .129 (3,28) ± .002 (0,05), #30 drill

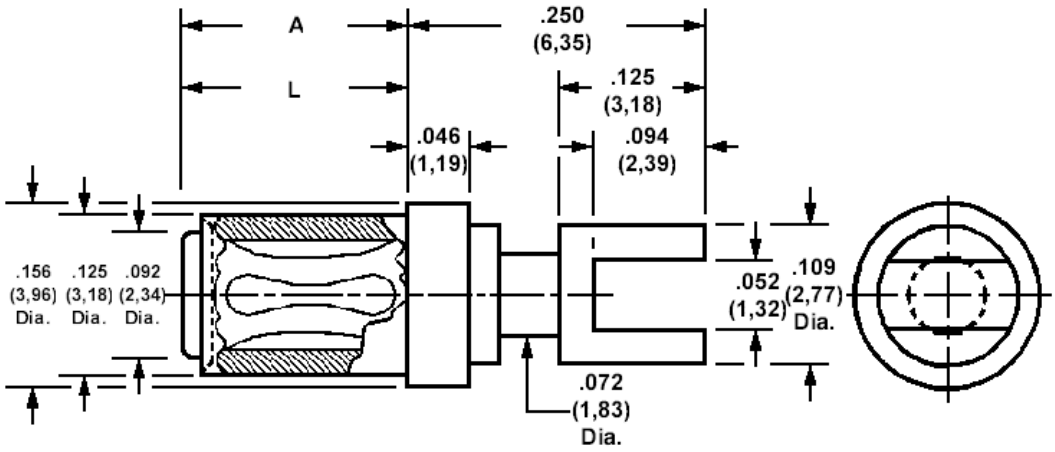

Min hole depth .175 (4,45)

How to order code
450-3379-YY-XX-00
Basic Part No YY = Board thickness XX = Finish

DIMENSIONS			
Dash No (YY)	**'L'**	**'A'**	**Board Thickness**
-02	.094 (2,39)	.196 (5,00)	.061 (1,57)
-03	.125 (3,18)	.196 (5,00)	.094 (2,39)
-04	.156 (3,96)	.196 (5,00)	.125 (3,18)
-05	.219 (5,56)	.253 (6,43)	.187 (4,75)

MATERIALS				
Component	**Material**	**Finish(-03)**	**Finish(-04)**	**Finish(-06)**
Body	Brass	Gold over Nickel	Tin	Tin
Spring	Beryllium copper	Gold over Nickel	Tin	Gold over Nickel

TOOLING	
Recommended Swaging Tools:-	
Anvil	435-6501-01-00-00
Punch	435-6620-01-00-00

Copyright© Cambion® Friday, 31 January 2003