


CTS Guitar Series 24mm Potentiometer

Features

- Low Noise
- Robust Construction
- Proprietary Anti-Static Lube
- Brass Shaft
- Brass Bushing
- Smooth Feel
- Various Shaft Trims
- Wide Selection of Tapers
- Reduced Shaft Wobble
- Solderable Cover

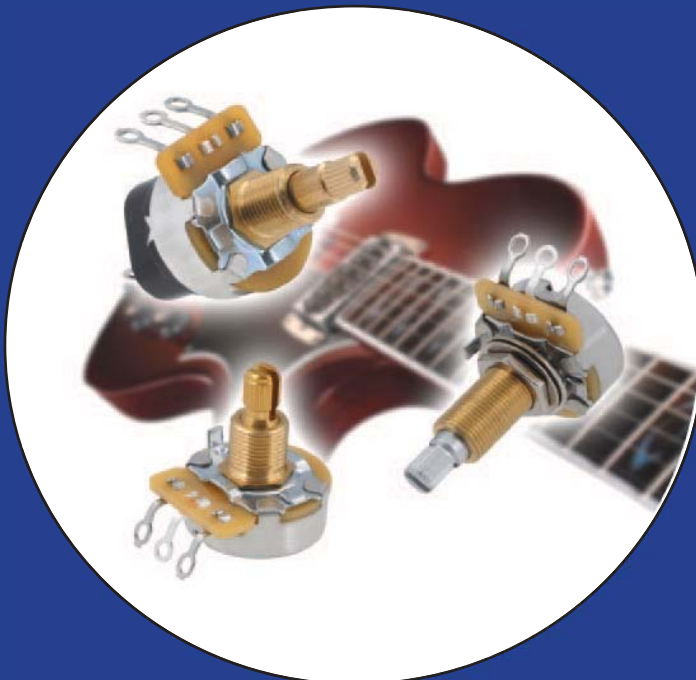

Electrical and Mechanical Specifications

Resistance Values

25K Ω , 50K Ω , 100K Ω , 250K Ω , 500K Ω , 1M Ω

Resistance Tolerance

$\pm 10\%$, $\pm 20\%$

Resistance Tapers

See Resistance Taper Chart for Available Tapers

Rotational Torque

Standard Torque: 0.75-6.00 in.oz.
Low Torque: 0.50-2.00 in.oz.

Rotational Angle

Mechanical: Approx. 300°

Power Rating

0.25 watts @ 55°C

RoHS Compliant

Bushing

3/8" – 32 UNEF
.250", .375", .500", .625", or .750" long

Shaft Length

.500", .625", .750", .875", 1.00", or 1.125"

Shaft Trim

Round, Flat, or Slot & Knurled

Stop Strength

9 in. lbs. minimum

Push-Pull Strength of Shaft


30 lbs. minimum

The CTS 450G Guitar Series Potentiometers are the same popular potentiometers used in guitars for years. This new series offers standard constructions for simplified ordering and pricing. CTS customized potentiometers are still available upon request.




Resistance Tapers

Standard Linear and Tapered Curves (no taps)


CTS Curve No.	% Resistance @ 50% Rotation
Std. D	50%
Spl. D (EIA "S" Curve)	50%
C	5%
A	10%
B	15%
BD	20%
H	25%
J	30%

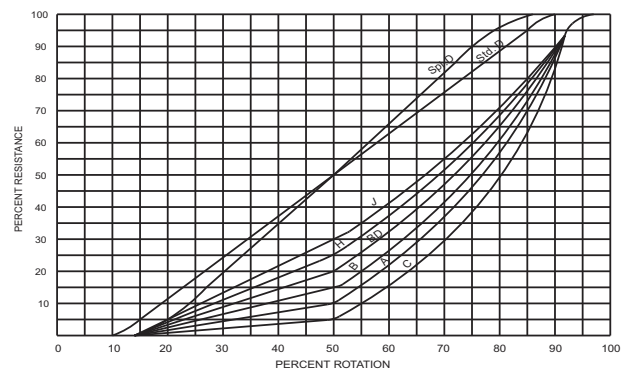


Metal Shaft, Bushing Mount, Solder Lug Terminals

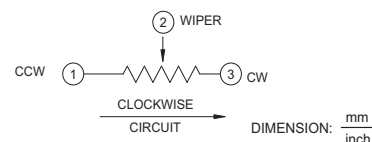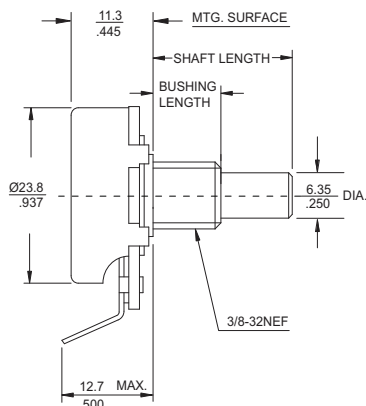


Shaft Trim



F - Flat



K - Slot & Knurled



R - Round

DIMENSION: mm / inch

Ordering Information

450G

T

2

4

K

253

B

4

S

TERMINAL STYLE

T - SOLDER LUG

BUSHING LENGTH

2 - .250"
3 - .375"
4 - .500"
5 - .625"
6 - .750"

SHAFT LENGTH

4 - .500"
5 - .625"
6 - .750"
7 - .875"
8 - 1.00"
9 - 1.125"

SHAFT TRIM

R - ROUND
F - FLAT
K - SLOT & KNURLED

RESISTANCE CODE

CODE

RESISTANCE

25325 K

50350 K

104100 K

254250 K

504500 K

1051 M

TOLERANCE

A - ± 10%
B - ± 20%

TAPER

1 - LINEAR (STD. D)
2 - 10% AUDIO (A)
3 - LINEAR (SPL. D)
4 - 15% AUDIO (B)
5 - 5% AUDIO (C)
6 - 20% AUDIO (BD)
7 - 25% AUDIO (H)
8 - 30% AUDIO (J)

TORQUE

S - STANDARD
L - LOW TORQUE

Please consult factory for custom features not listed.