

# XN6114

## Silicon PNP epitaxial planer transistor

For switching/digital circuits

### ■ Features

- Two elements incorporated into one package.  
(Transistors with built-in resistor)
- Reduction of the mounting area and assembly cost by one half.

### ■ Basic Part Number of Element

- UN1114 × 2 elements


### ■ Absolute Maximum Ratings (Ta=25°C)

|                   | Parameter                    | Symbol    | Ratings     | Unit |
|-------------------|------------------------------|-----------|-------------|------|
| Rating of element | Collector to base voltage    | $V_{CBO}$ | -50         | V    |
|                   | Collector to emitter voltage | $V_{CEO}$ | -50         | V    |
|                   | Collector current            | $I_C$     | -100        | mA   |
| Overall           | Total power dissipation      | $P_T$     | 300         | mW   |
|                   | Junction temperature         | $T_j$     | 150         | °C   |
|                   | Storage temperature          | $T_{stg}$ | -55 to +150 | °C   |

### ■ Electrical Characteristics (Ta=25°C)


| Parameter                               | Symbol                      | Conditions                                  | min  | typ  | max    | Unit       |
|-----------------------------------------|-----------------------------|---------------------------------------------|------|------|--------|------------|
| Collector to base voltage               | $V_{CBO}$                   | $I_C = -10\mu A, I_E = 0$                   | -50  |      |        | V          |
| Collector to emitter voltage            | $V_{CEO}$                   | $I_C = -2mA, I_B = 0$                       | -50  |      |        | V          |
| Collector cutoff current                | $I_{CBO}$                   | $V_{CB} = -50V, I_E = 0$                    |      |      | - 0.1  | $\mu A$    |
|                                         | $I_{CEO}$                   | $V_{CE} = -50V, I_B = 0$                    |      |      | - 0.5  | $\mu A$    |
| Emitter cutoff current                  | $I_{EBO}$                   | $V_{EB} = -6V, I_C = 0$                     |      |      | - 0.2  | mA         |
| Forward current transfer ratio          | $h_{FE}$                    | $V_{CE} = -10V, I_C = -5mA$                 | 80   |      |        |            |
| Forward current transfer $h_{FE}$ ratio | $h_{FE} (small/large)^{*1}$ | $V_{CE} = -10V, I_C = -5mA$                 | 0.5  | 0.99 |        |            |
| Collector to emitter saturation voltage | $V_{CE(sat)}$               | $I_C = -10mA, I_B = -0.3mA$                 |      |      | - 0.25 | V          |
| Output voltage high level               | $V_{OH}$                    | $V_{CC} = -5V, V_B = -0.5V, R_L = 1k\Omega$ | -4.9 |      |        | V          |
| Output voltage low level                | $V_{OL}$                    | $V_{CC} = -5V, V_B = -2.5V, R_L = 1k\Omega$ |      |      | - 0.2  | V          |
| Transition frequency                    | $f_T$                       | $V_{CB} = -10V, I_E = 1mA, f = 200MHz$      |      | 80   |        | MHz        |
| Input resistance                        | $R_1$                       |                                             | -30% | 10   | +30%   | k $\Omega$ |
| Resistance ratio                        | $R_1/R_2$                   |                                             | 0.17 | 0.21 | 0.25   |            |

\*1 Ratio between 2 elements

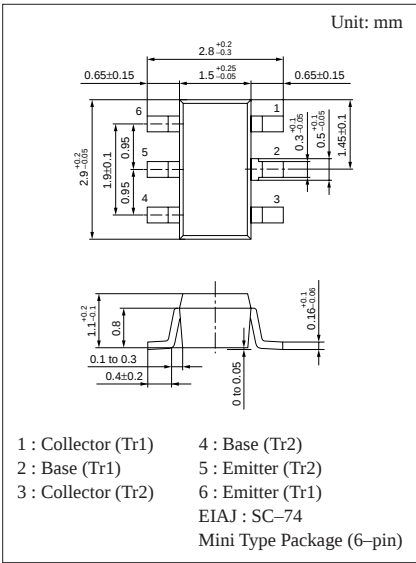


Marking Symbol: CK


Internal Connection

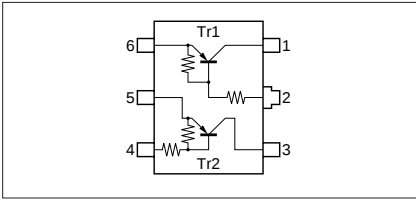


$P_T - T_a$

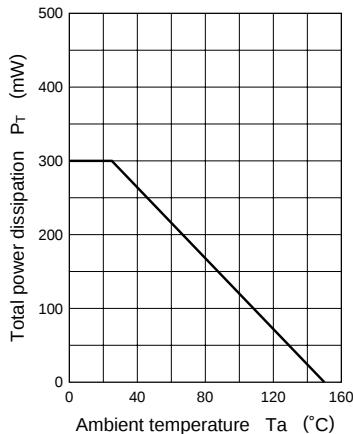


$I_C - V_{CE}$

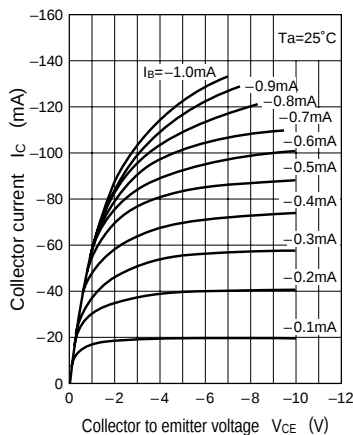


$V_{CE(sat)} - I_C$

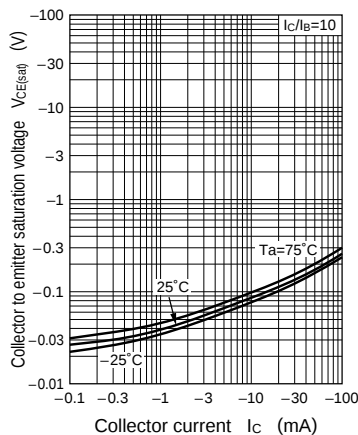


$h_{FE} - I_C$

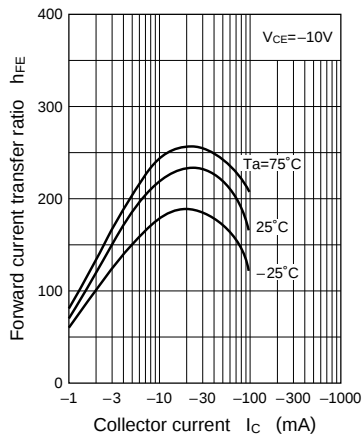

$C_{ob} - V_{CB}$

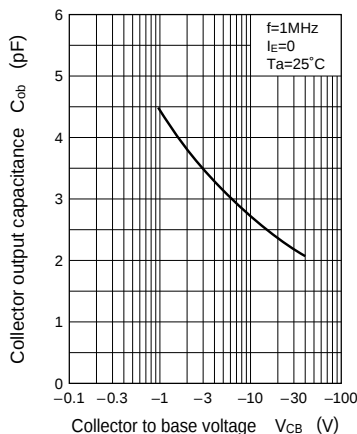

$I_O - V_{IN}$

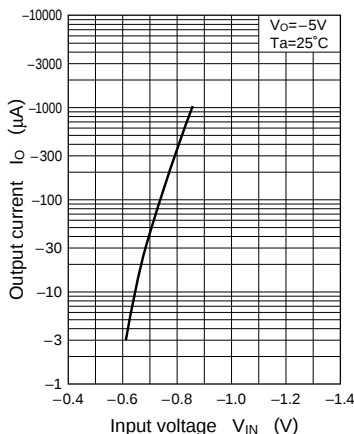

$V_{IN} - I_O$

