
Pomona®

Model 4601
Triple Banana Jack, Insulated

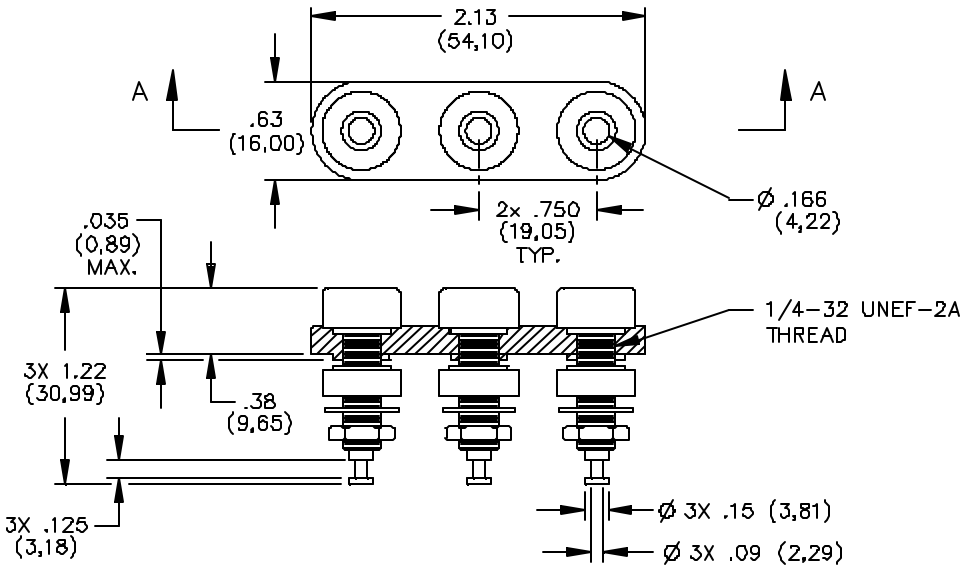

SECTION A–A

FEATURES:

- Closed entry receptacle, 4.2 (.166) dia. x 23.4 (.920) deep.
- Mounts in panels from 1.6 (.063) to 9.5 (.375) thick.
- Nickel plated lock washer and ¼-32 hex nut.
- Mates to Model #2970.
- Ideal for connection to power supplies with positive, negative and return connections.

MATERIALS:

Banana jack insulation: Polycarbonate molded to banana jack bodies.

Color: One Red, one Black, and one Green.

Mounting Plate: Polycarbonate.

Color: See ordering instructions.

Insulator: Polycarbonate. Color matches color of banana jack insulation.

Lockwasher ¼ Int tooth:

Material: Steel.

Finish: Nickel plated per QQ-N-290

Hex nut ¼-32:

Material: Brass.

Finish: Nickel plated per QQ-N-290.

Banana jack body/solder turret:

Material: Brass, per QQ-B-626, Alloy 360, ½ Hard.

Finish: Bright tin plated per MIL-T-10727.

RATINGS: (Entire assembly)

Operating Temperature: +115°C. (+239°F.) Max.

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 2500 WVDC Max.

Current: 15 Amperes

ORDERING INFORMATION: Model 4601-*

*=Color, -0 Black, -2 Red

Ordering Example: 4601-2 Color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90597** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com