
Pomona®

Model 4702
Banana Plug To In-Line Banana Jack

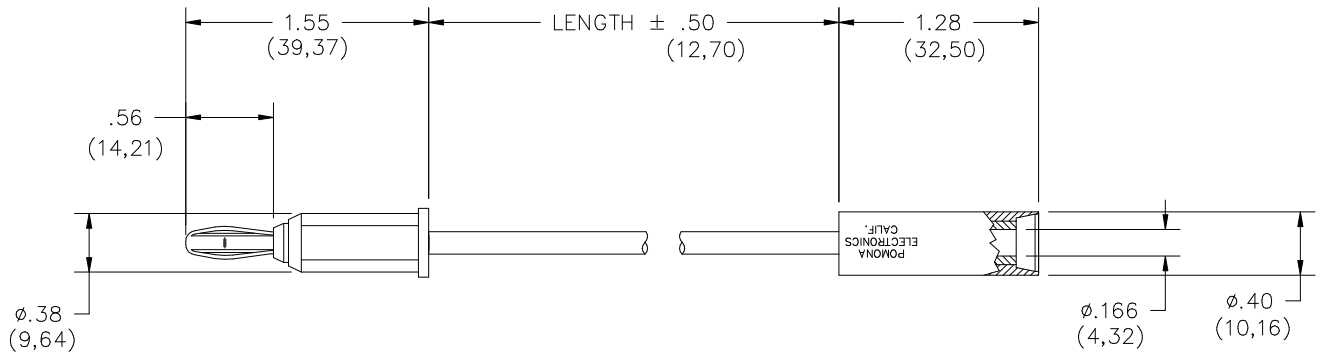

FEATURES:

- Dual Purpose
- Insulates all hot leads when used as an extension cord.
- Endless extension couplings possible with any banana plug patch cord.

MATERIALS:

Conn: Banana Plug

Material: Spring, One piece heat treated Beryllium Copper, Beryllium Copper 25 per QQ-C-533.
Finish: Nickel plate per QQ-N-290 class 2 (.0002 min.).
Insulation: Polypropylene, molded to plug body and wire. Color matches color of wire.
Operating Temperature: +55º C (+131º F) Max.
Marking: "POMONA ELECTRONICS CALIF."
Wire: 18 AWG; stranding 65 x 36 tinned copper, polyvinyl chloride insulated (.050 wall thickness).
Marking: POMONA 4702-"XX".

Conn: In-Line Banana Jack

Material: Brass, H.H. per QQ-B-626, Alloy 360.
Finish: Nickel plate per QQ-N-290. Class 2 (.0002 min.).
Insulation: Polypropylene, molded to jack body and wire. Color matches color of wire.
Operating Temperature: +55º C (+131º F) Max.
Marking: "POMONA ELECTRONICS CALIF."

RATINGS: Entire Assembly
Operating Temperature: +55º C (+131º F) Max.
Operating Voltage: 5000 W VDC
Current: 15 Amperes Cont.

ORDERING INFORMATION: Model 4702-XX-*
XX = Cable Lengths, Standard Lengths: 24" (610mm), 36" (914mm), & 48" (1219mm).
Additional lengths can be quoted upon request.
*=Color, -0 black, -2 red.
Ordering Example: 4702-48-2 Indicates 48" in length, color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 425-446-5844
Technical Support: technicalsupport@pomonatest.com

www.pomonaelectronics.com