




AA-0233-1H

The H version of the 0233 series filter offers good common and differential mode insertion loss in an extremely small package.

This filter is well suited in applications where space is very limited.

Agency Approvals: UL, CSA, VDE

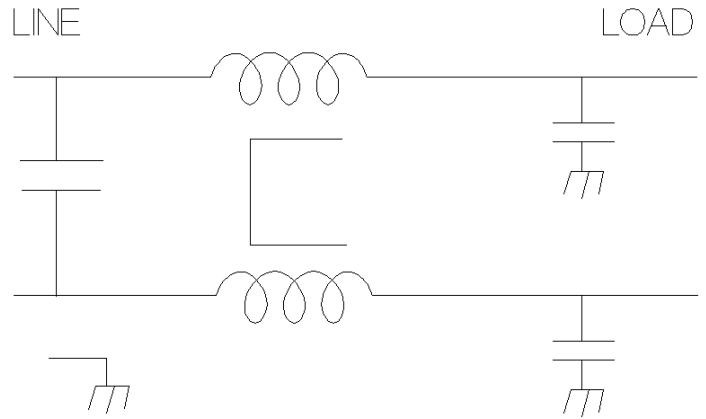



Operating Voltage = _____ 115/250VAC
 Operating Current = _____ 1 Amp
 Operating Frequency = _____ 50—60 Hz
 Operating Temperature = _____ -20°—50°C

Diel. Withstanding (Line—GND) = _____ 1500 VDC; 1 Min
 Diel. Withstanding (Line—Line) = _____ 1500 VDC; 1 Min

Leakage Current = _____ 0.5 mA @ 250 VAC, 50Hz

Residual Voltage (Max after 5 sec.) = _____ 34 Volts

MTBF= _____ 482,486 Hrs @ 30° GB

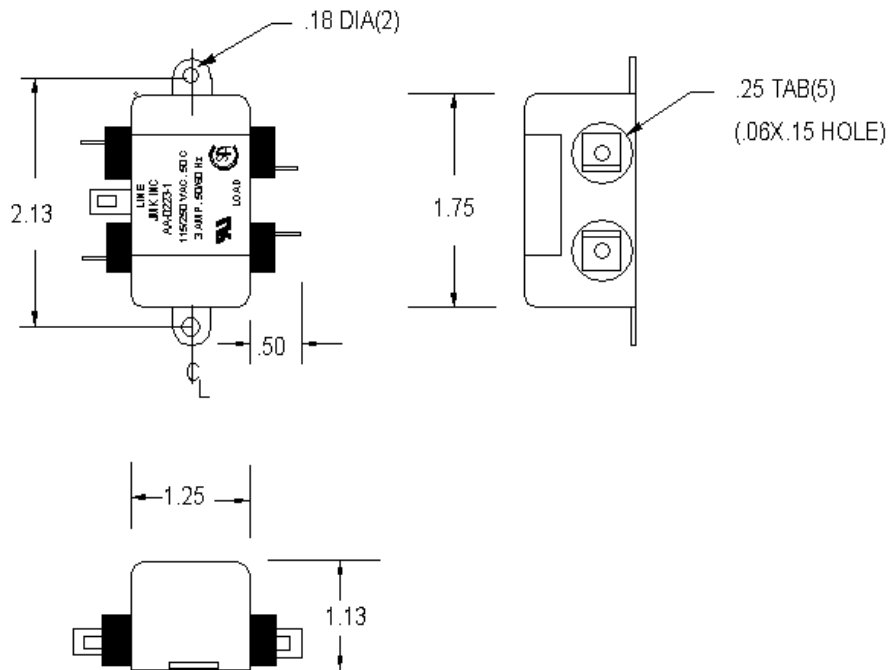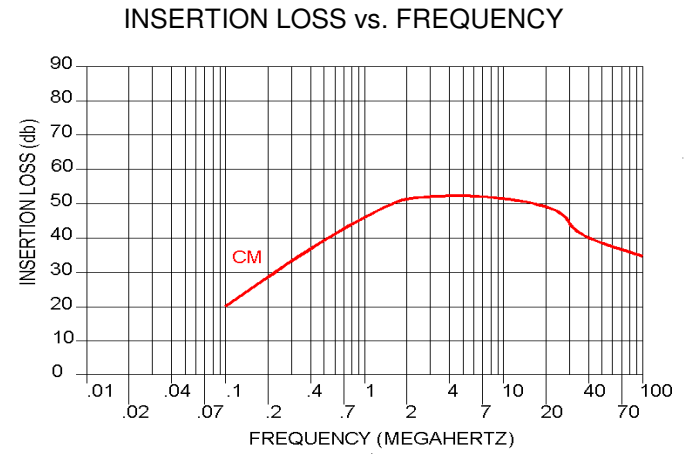

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884