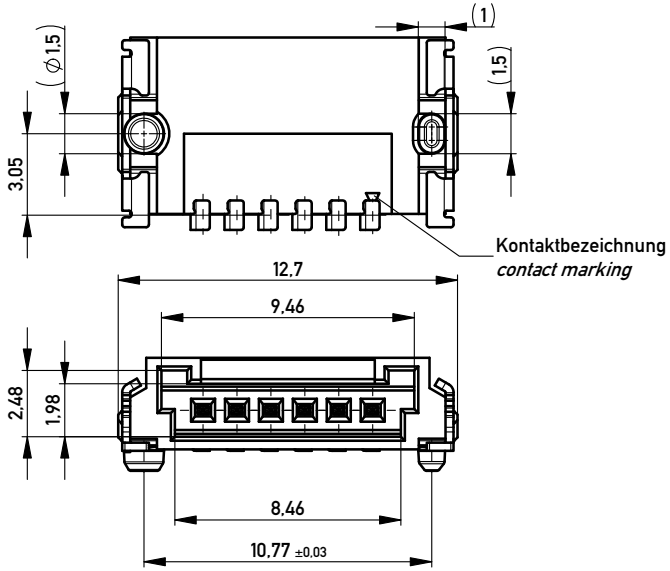




Anforderungsstufe 1
*Performance Level 1*


Kontaktbereich vergoldet
*Mating Area gold plating*

Anschlussbereich verzinnt 4-6 µm
*Terminal Area 4-6 µm tin plating*


Koplanarität der Anschlüsse ≤ 0,1 mm
*Coplanarity Area of Termination ≤ 0,1 mm*


Verpackt im Gurt nach DIN IEC 60286-3
*Tape on Reel Packaging according to DIN IEC 60286-3*
Verpackungseinheit: 1000 Stück
*Packaging unit: 1000 pcs*



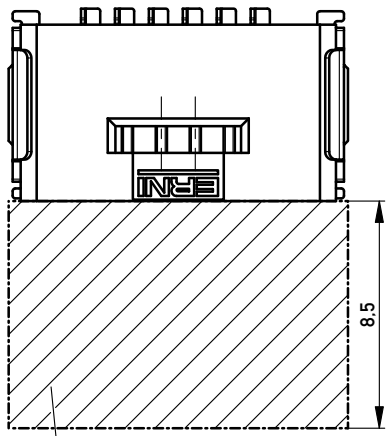


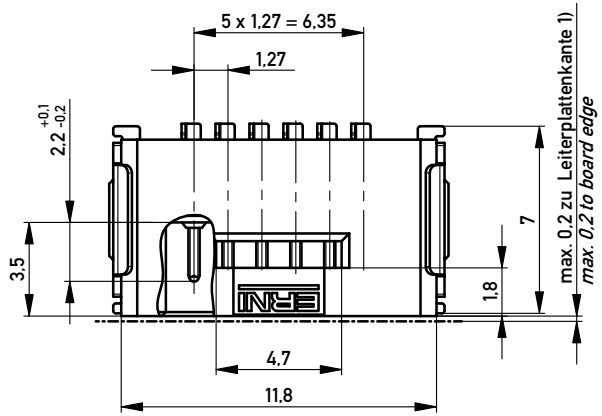

Sperrfläche für Leiterbahnen
gültig bei Verwendung von
Gegenstecker Federleiste 90°
in SKV Ausführung
*Restricted area for conductors*
*valid for use by mathing*
*female connector 90°*
*in IDC version*





Abspulrichtung - *Reel off Direction*

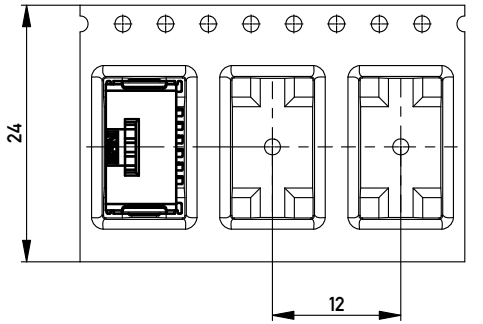


## Leiterplatten-Layout für SMT
*PCB-Layout for SMT*

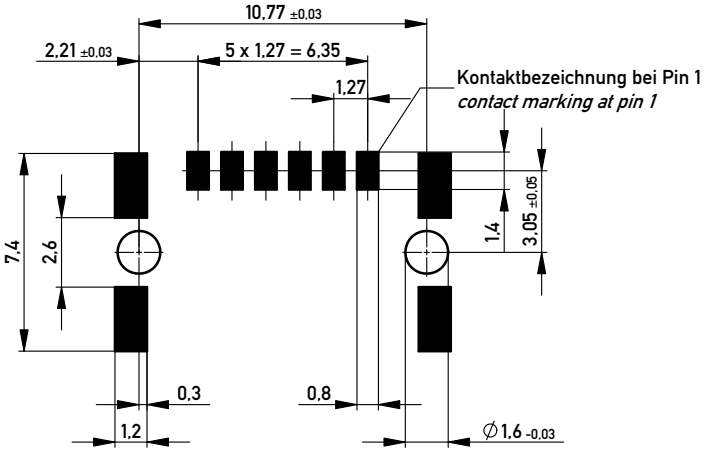


1) gültig bei Verwendung von Gegenstecker Federleiste 90° in SMD Ausführung
*valid for use by mating female connector 90 ° in SMD version*

Für die Anforderung nach PG 9 der LV214 (Koshiri-Sicherheit)
*For the requirement of the LV214 PG 9 (Koshiri-security)*

Information:

Tolerances

All Dimensions in mm

Scale 5:1

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
M 1,27 SRC A, 6-polig KS
*M 1,27 SRC A, 6-pin KS*

ERNI www.ERNI.com

474810

| Index | | Date | |
|---|---|---|---|
| b | | 21.03.2014 | |

I
A3

Class SRCA